

2550 Intro to cybersecurity

L6: Authorization

abhi shelat

Thanks Christo for slides!

Authentication:

Authorization

After Authenticating a subject, what next?

Access Control

- Policy specifying how entities can interact with resources
 - i.e., Who can access what?
 - Requires authentication and authorization
- Access control primitives

Principal User of a system

Subject Entity that acts on behalf of principals

Object Resource acted upon by subjects

Software program

Files


Sockets

Devices

OS APIs

Access Control Check

- Given an access request from a **subject**, on behalf of a **principal**, for an **object**, return an access control decision based on the **policy**

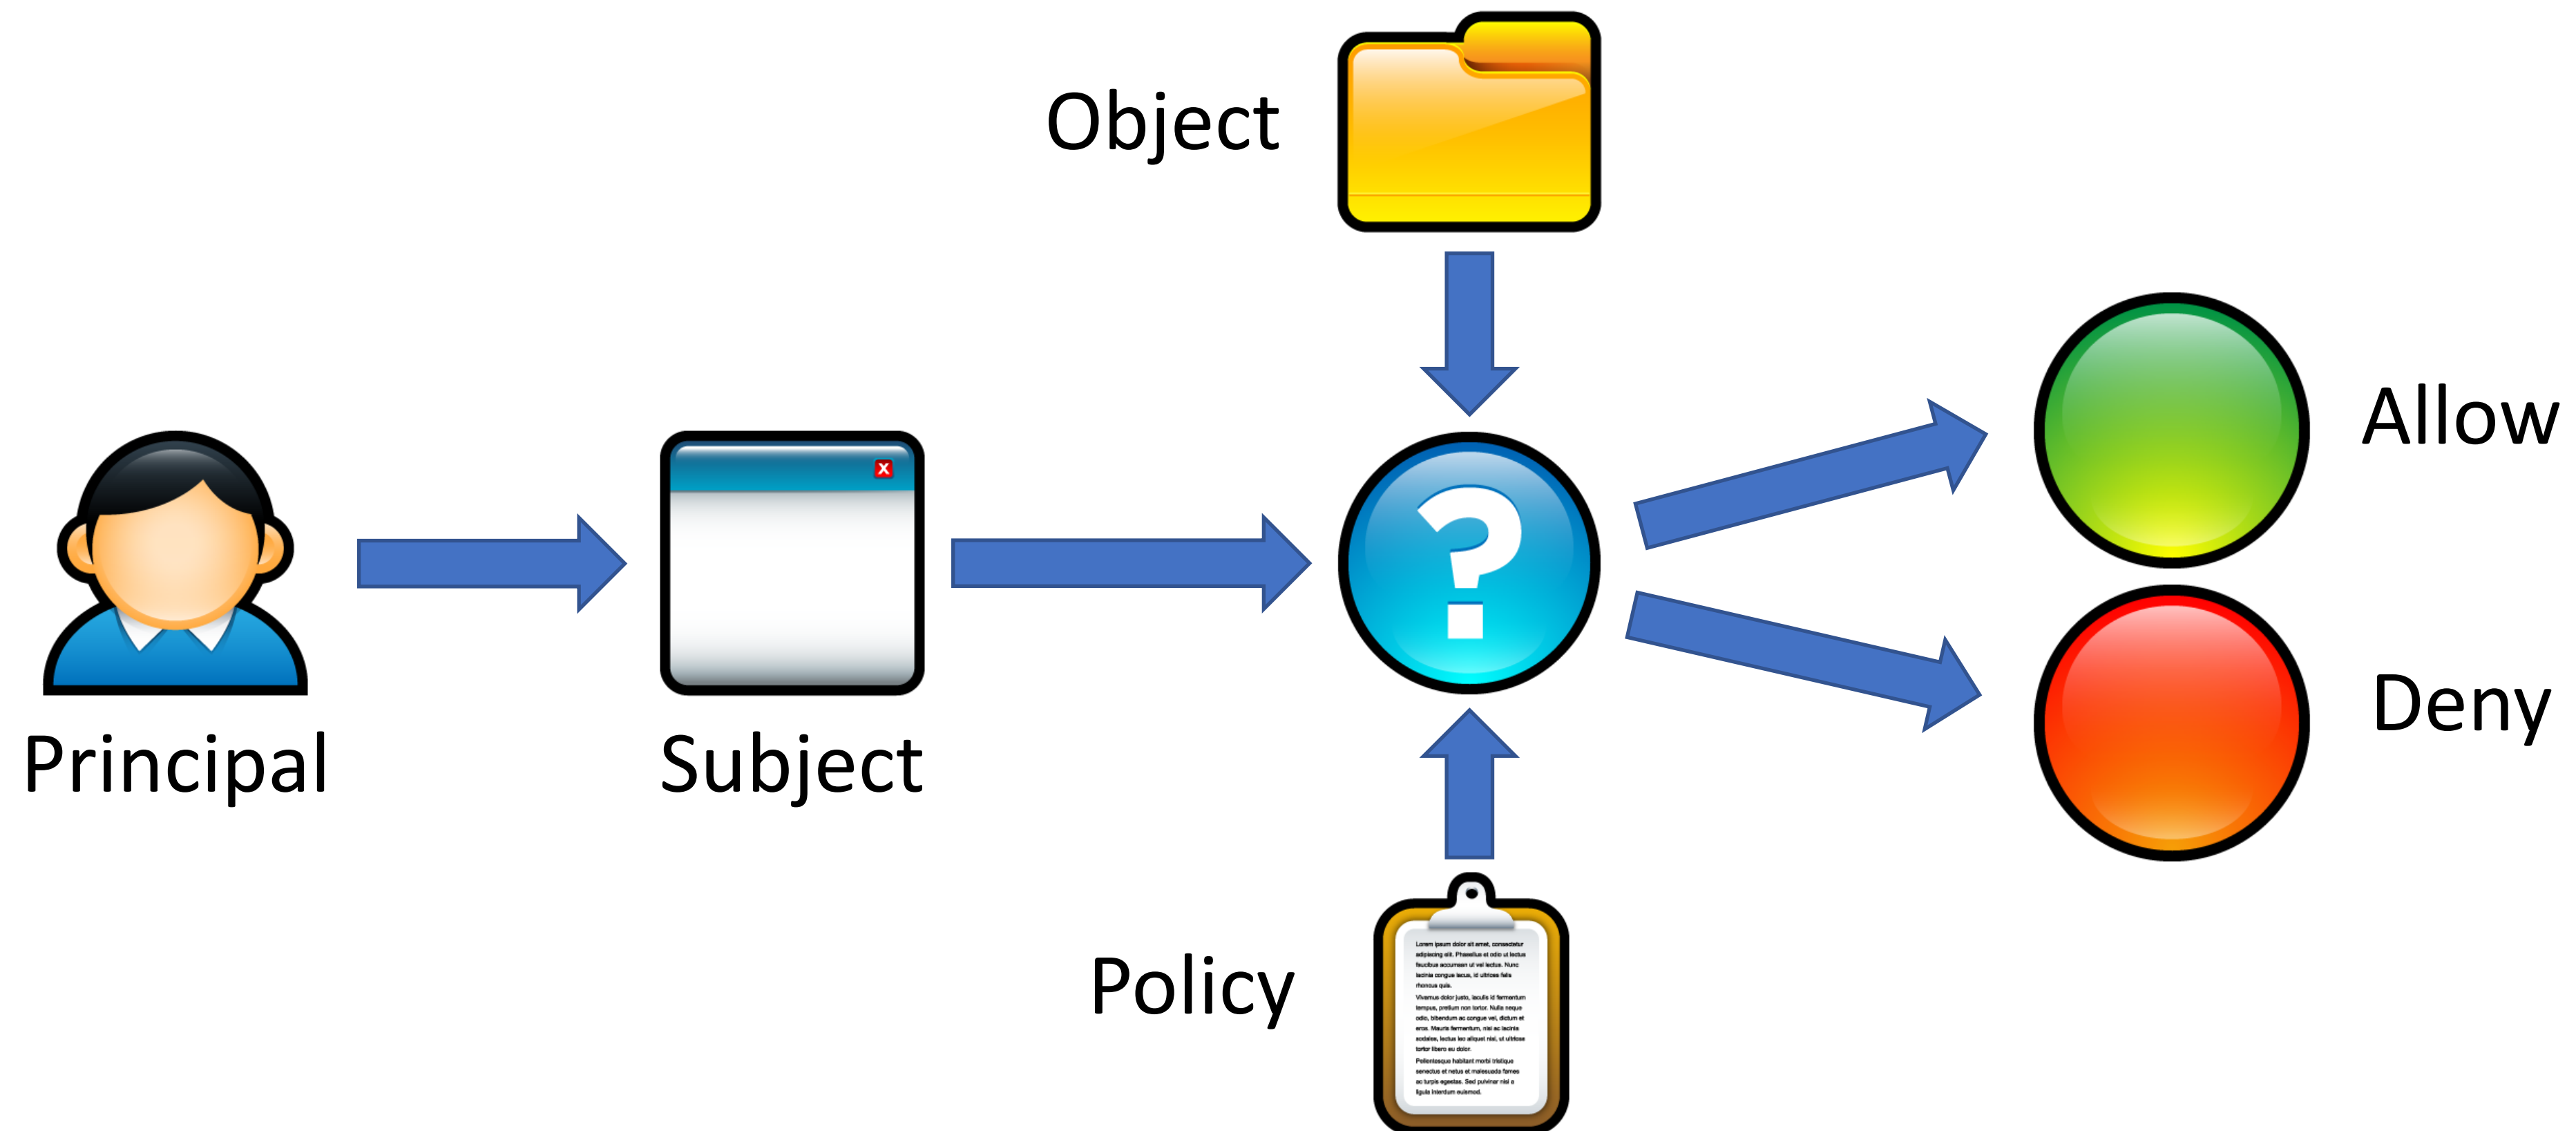

Access Control Models

- Discretionary Access Control (DAC)
 - The kind of access control you are familiar with
 - Access rights propagate and may be changed at subject's discretion

Access Control Models

- Discretionary Access Control (DAC)
 - The kind of access control you are familiar with
 - Access rights propagate and may be changed at subject's discretion
- Mandatory Access Control (MAC)
 - Access of subjects to objects is based on a system-wide policy
 - Denies users full control over resources they create

Discretionary Access Control

Access Control Matrices

Access Control Lists

Unix Access Control

Discretionary Access Control

- According to Trusted Computer System Evaluation Criteria (TCSEC)

"A means of **restricting access to objects** based on the **identity** and need-to-know of users and/or groups to which they belong.

Controls are **discretionary** in the sense that a subject with a certain access permission **is capable of passing that permission** (directly or indirectly) to any other subject."

Access Control Matrices

Given subjects $s_i \in S$, objects $o_j \in O$, rights {**R**ead, **W**rite, **eX**ecute},

- Introduced by Lampson in 1971
- Static description of protection state
- Abstract model of concrete systems

	O ₁	O ₂	O ₃
S ₁	RW	RX	
S ₂	R	RWX	RW
S ₃		RWX	


Access Control List (ACL)

- Each object has an associated list of subject→operation pairs
- Authorization verified for each request by checking list of tuples
- Used pervasively in filesystems and networks
 - "Users a, b, and c and read file x."
 - "Hosts a and b can listen on port x."

	O ₁	O ₂	O ₃
S ₁	RW	RX	
S ₂	R	RWX	RW
S ₃		RWX	

Access Control List (ACL)

- Each object has an associated list of subject→operation pairs
- Authorization verified for each request by checking list of tuples
- Used pervasively in filesystems and networks
 - "Users a, b, and c and read file x."
 - "Hosts a and b can listen on port x."

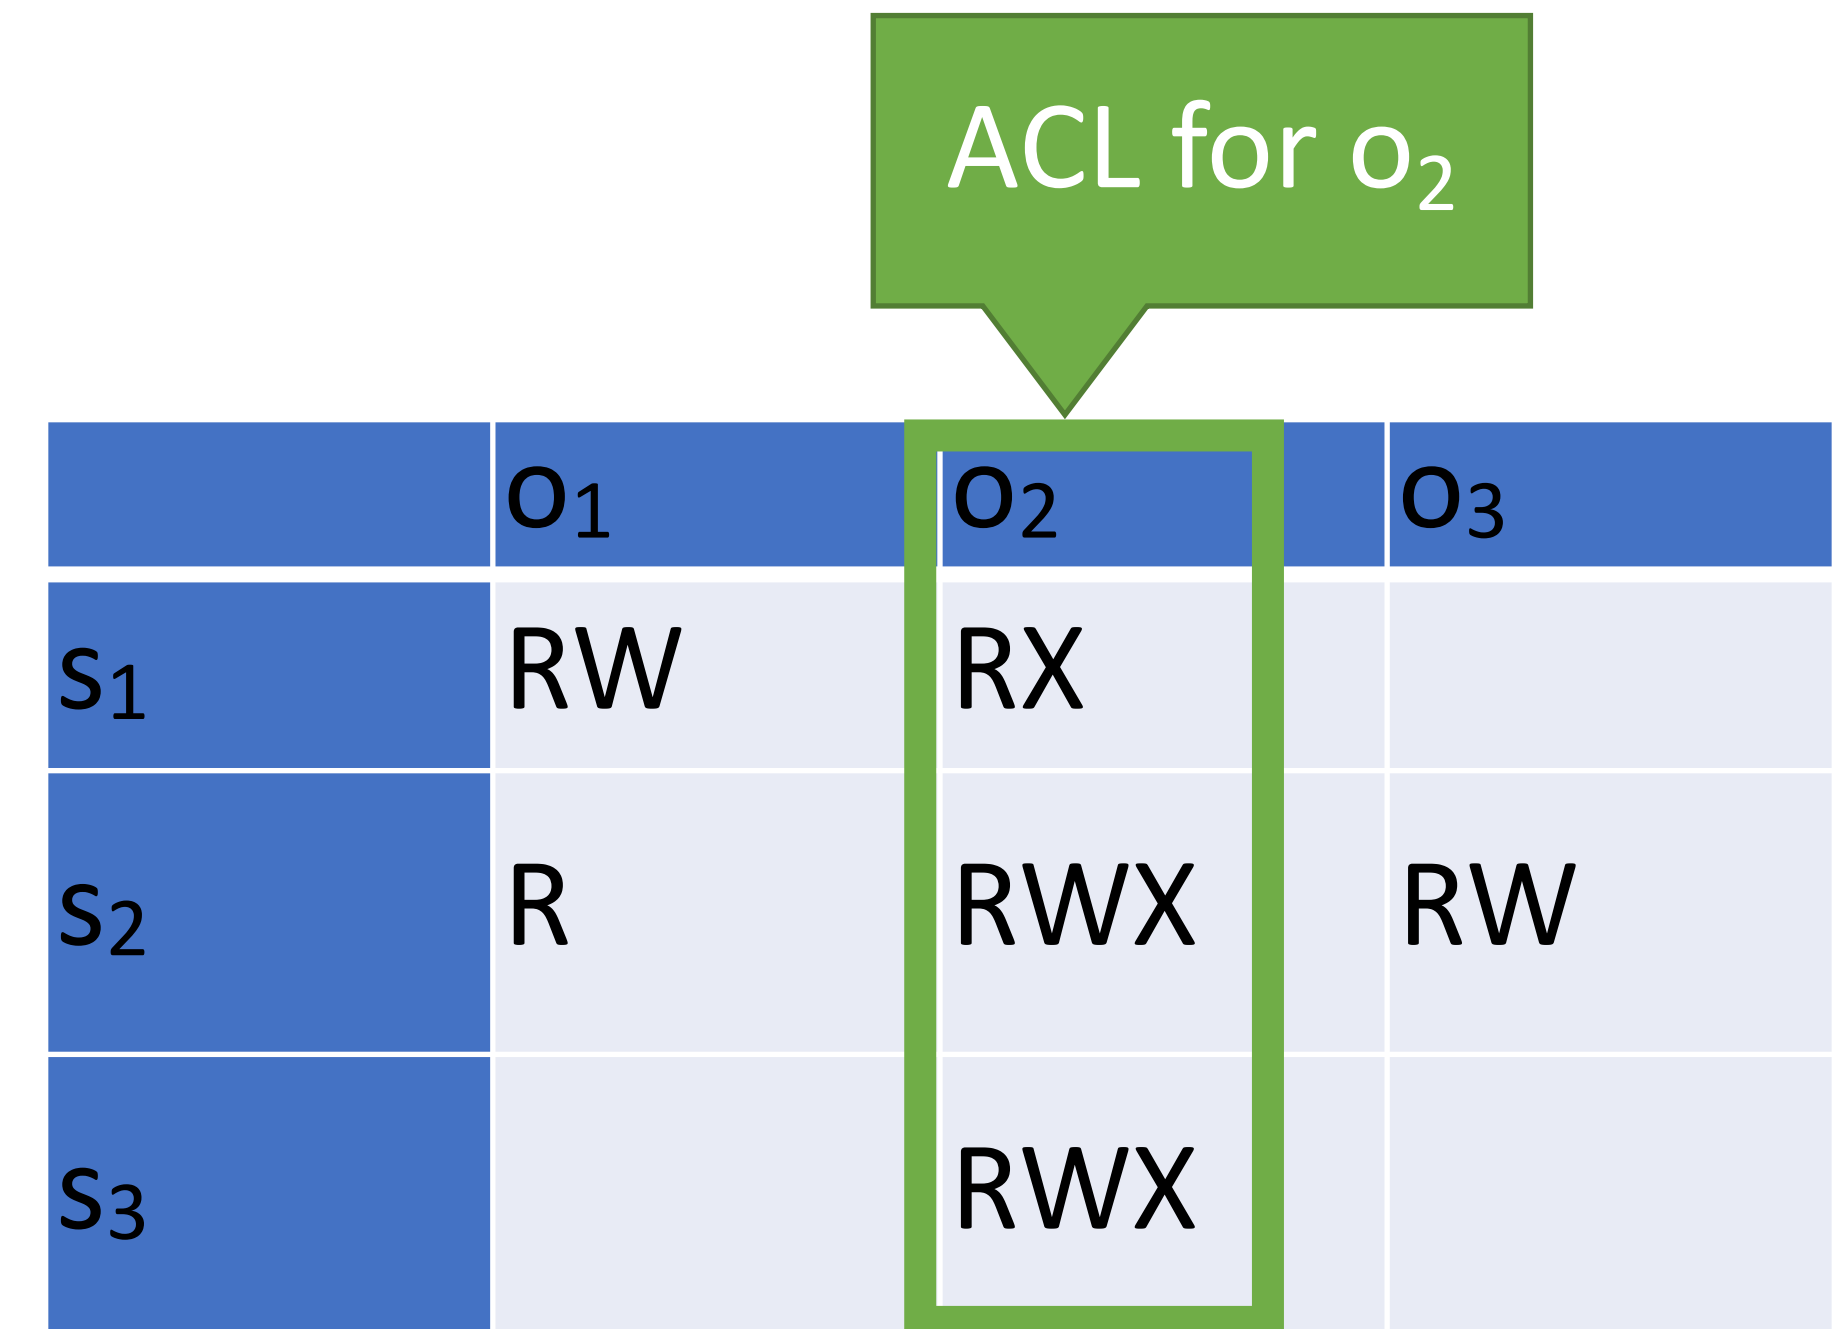

The diagram illustrates an Access Control List (ACL) table. The table has three columns representing objects (O₁, O₂, O₃) and three rows representing subjects (S₁, S₂, S₃). The cells contain the permissions granted to each subject for each object. A green callout box labeled "ACL for o₂" points to the column for object O₂, which is also highlighted with a green border.

	O ₁	O ₂	O ₃
S ₁	RW	RX	
S ₂	R	RWX	RW
S ₃		RWX	

Windows ACLs




	<i>D:\Music</i>	<i>D:\Images</i>	<i>D:\Documents</i>
<i>System</i>	RWX	RWX	RWX
<i>Administrators</i>	RW	RW	RW
<i>Users:Bob</i>	RWX	RW	
<i>Users:Alice</i>		RW	R

Windows ACLs



	<i>D:\Music</i>	<i>D:\Images</i>	<i>D:\Documents</i>
<i>System</i>	RWX	RWX	RWX
<i>Administrators</i>	RW	RW	RW
<i>Users:Bob</i>	RWX	RW	
<i>Users:Alice</i>		RW	R

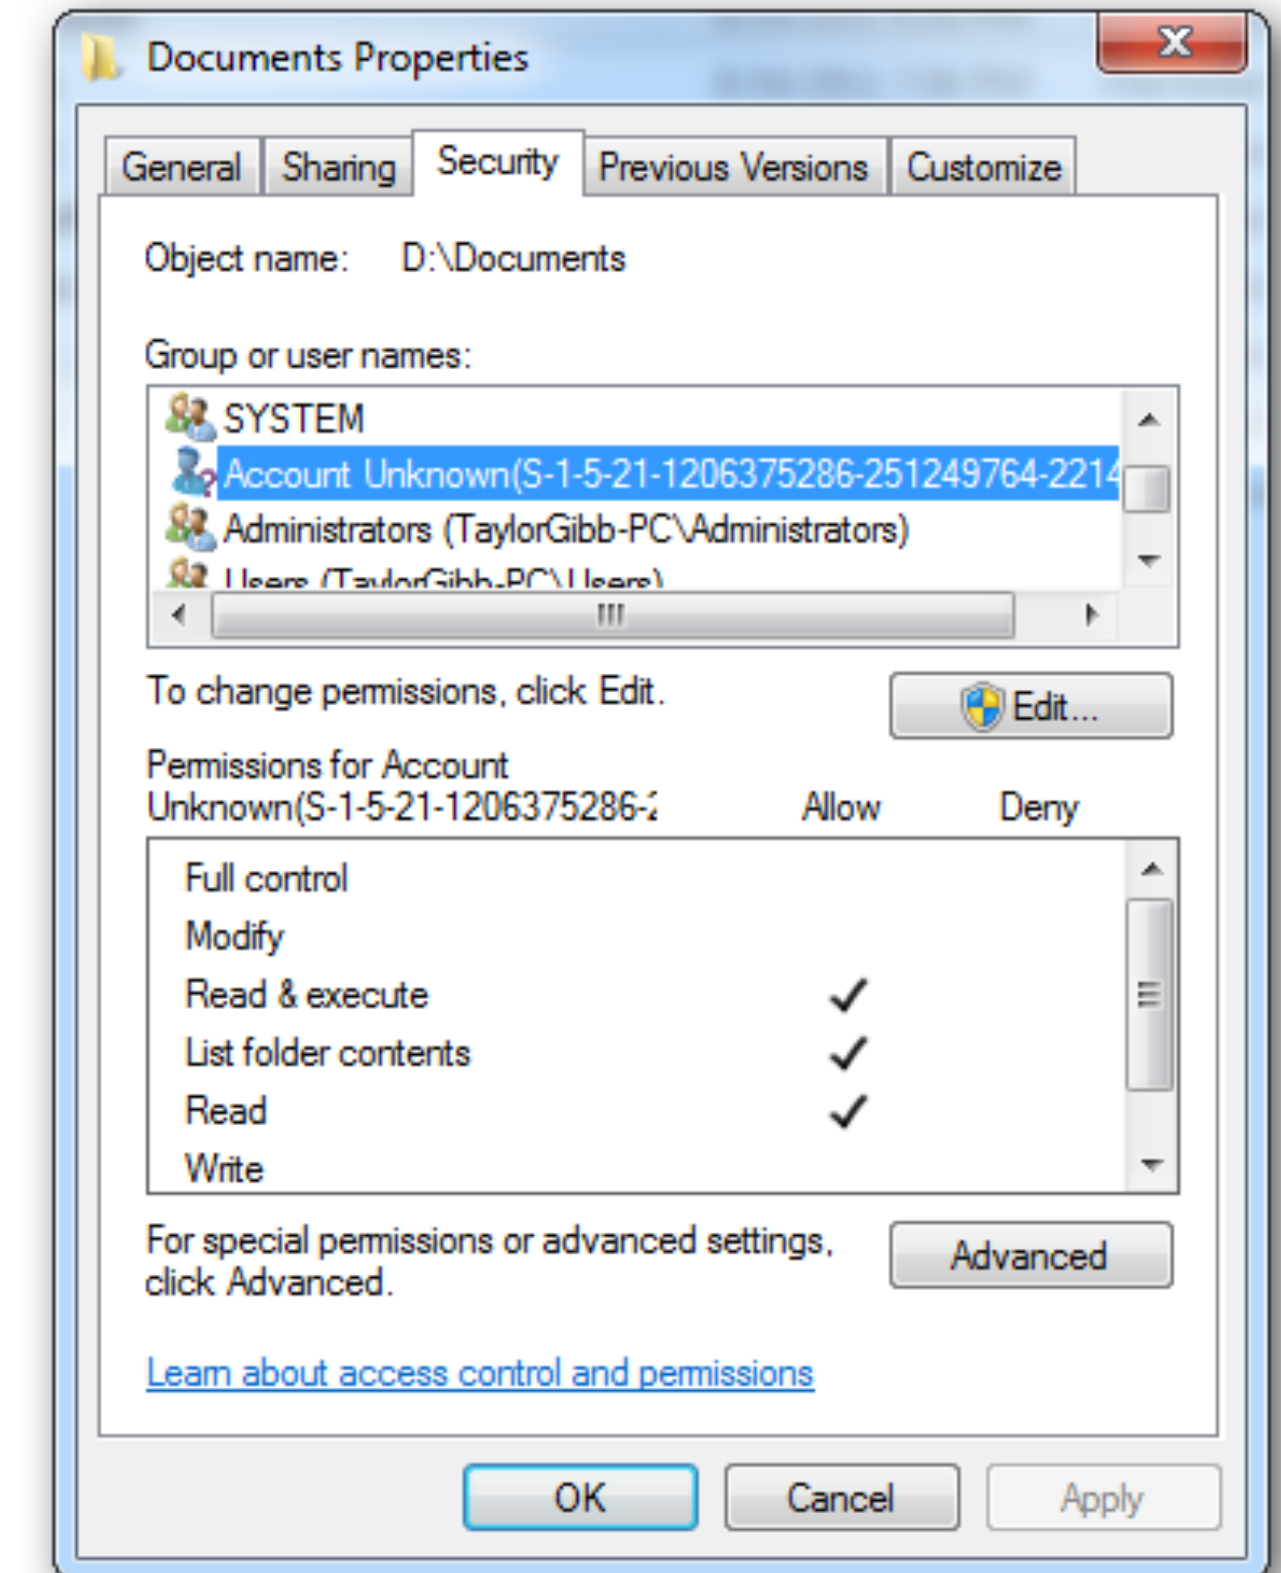

ACL Review

The Good

- Very flexible
 - Can express any possible access control matrix
 - Any principal can be configured to have any rights on any object

The Bad

ACL Review

The Good

- Very flexible
 - Can express any possible access control matrix
 - Any principal can be configured to have any rights on any object

The Bad

- Complicated to manage
 - Every object can have wildly different policies
 - Infinite permutations of subjects, objects, and rights

Unix-style Permissions

- Based around the concept of **owners** and **groups**
 - All objects have an owner and a group
 - Permissions assigned to owner, group, and everyone else
- Authorization verified for each request by mapping the subject to owner, group, or other and checking the associated permissions

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
```

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
```


Owner

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
```

Owner

Owner

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
```

Owner

Owner Group

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi 512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi 17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty 313 Jan 29 22:47 my_program.py
-rw----- 1 root root 896 Jan 29 22:47 sensitive_data.csv
```



Owner
Group



Owner Group

d → **Directory**


r → **Read**


w → **Write**

x → **eXecute**

Unix Permissions

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root  root     896 Jan 29 22:47 sensitive_data.csv
```

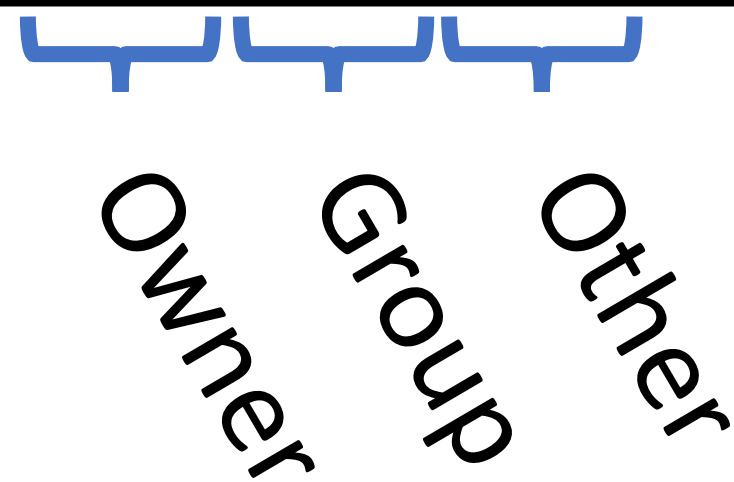
Owner Group Other

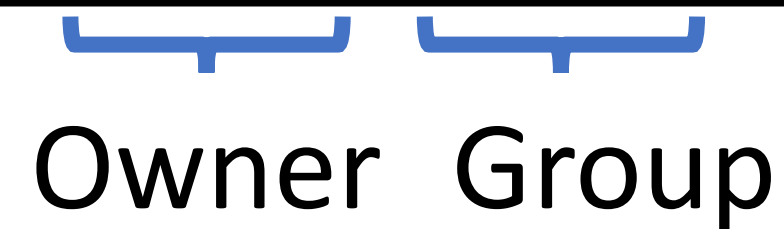
Owner Group

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

Directory

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi      512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi       17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty   313 Jan 29 22:47 my_program.py
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
```

Owner Group Other

Owner Group

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Unix Permissions

Directory

Permission to list the contents of a directory

```
Abhi~$ ls -l
drwxrwxrwx 0 abhi abhi 512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi 17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty 313 Jan 29 22:47 my_program.py
-rw----- 1 root root 896 Jan 29 22:47 sensitive_data.csv
```

Owner Group Other

Owner Group

d → **Directory**

r → **Read**

w → **Write**

x → **eXecute**

Setting Permissions

+ → add permissions
- → remove permissions

`chmod [who]<+/-><permissions> <file1> [file2] ..`

(omitted) → user, group, and other
a → user, group, and other
u → user
g → group
o → other

r → Read
w → Write
x → eXecute

```
abhi@DESKTOP:~$ ls -l
drwxrwxrwx 0 abhi abhi 512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi 17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ chmod ugo-rwx my_dir
abhi@DESKTOP:~$ chmod go-rwx my_program.py
abhi@DESKTOP:~$ chmod u-rw my_program.py
abhi@DESKTOP:~$ chmod +x my_file
abhi@DESKTOP:~$ ls -l
d----- 0 abhi abhi 512 Jan 29 22:46 my_dir
-rwxrwxrwx 1 abhi abhi 17 Jan 29 22:46 my_file
---x----- 1 abhi faculty 313 Jan 29 22:47 my_program.py
```

Alternate Form of Setting Permissions

```
chmod ### <file1> [file2] ...
```

- #s correspond to owner, group, and other
- Each value encodes read, write, and execute permissions
 - 1 → execute
 - 2 → write
 - 4 → read

Alternate Form of Setting Permissions

```
chmod ### <file1> [file2] ...
```

- #s correspond to owner, group, and other
- Each value encodes read, write, and execute permissions
 - 1 → execute
 - 2 → write
 - 4 → read
- What if you want to set something as read, write, and execute?

Alternate Form of Setting Permissions

```
chmod ### <file1> [file2] ...
```

- #s correspond to owner, group, and other
- Each value encodes read, write, and execute permissions
 - 1 → execute
 - 2 → write
 - 4 → read
- What if you want to set something as read, write, and execute?
 - $1 + 2 + 4 = 7$

```
abhi@DESKTOP:~$ ls -l
drwxrwxrwx 0 abhi abhi 512 Jan 29 22:46 my_dir
-rw-rw-rw- 1 abhi abhi 17 Jan 29 22:46 my_file
-rwxrwxrwx 1 abhi faculty 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ chmod 000 my_dir
abhi@DESKTOP:~$ chmod 100 my_program.py
abhi@DESKTOP:~$ chmod 777 my_file
abhi@DESKTOP:~$ ls -l
d----- 0 abhi abhi 512 Jan 29 22:46 my_dir
-rwxrwxrwx 1 abhi abhi 17 Jan 29 22:46 my_file
---x----- 1 abhi faculty 313 Jan 29 22:47 my_program.py
```

Who May Change Permissions?

```
abhi@DESKTOP:~$ groups
abhi faculty
abhi@DESKTOP:~$ ls -l
-rw-rw-rw- 1 abhi abhi      17 Jan 29 22:46 my_file
-rw-rw-rw- 1 abhi faculty   17 Jan 29 22:46 my_other_file
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
-rwxrwx--- 1 root faculty  313 Jan 29 22:47 program.py
```

- Which files is user *abhi* permitted to *chmod*?

Who May Change Permissions?

```
abhi@DESKTOP:~$ groups
abhi faculty
abhi@DESKTOP:~$ ls -l
-rw-rw-rw- 1 abhi abhi      17 Jan 29 22:46 my_file
-rw-rw-rw- 1 abhi faculty   17 Jan 29 22:46 my_other_file
-rw----- 1 root root     896 Jan 29 22:47 sensitive_data.csv
-rwxrwx--- 1 root faculty  313 Jan 29 22:47 program.py
```

- Which files is user *abhi* permitted to *chmod*?
 - Only owners can *chmod* files
 - *abhi* can *chmod* *my_file* and *my_other_file*
 - Group membership doesn't grant *chmod* ability (cannot *chmod* *program.py*)

Setting Ownership

- Unix uses discretionary access control
 - New objects are owned by the subject that created them
- How can you modify the owner or group of an object?

```
chown <owner>:<group> <file1> [file2] ...
```

Who May Change Ownership?

```
abhi@DESKTOP:~$ groups
abhi faculty
abhi@DESKTOP:~$ ls -l
-rw-rw-rw- 1 abhi abhi      17 Jan 29 22:46 my_file
-rw-rw-rw- 1 abhi faculty  17 Jan 29 22:46 my_other_file
-rw----- 1 root  root    896 Jan 29 22:47 sensitive_data.csv
-rwxrwx--- 1 root  faculty 313 Jan 29 22:47 program.py
```

- Which operations are permitted?

```
chown cbw:faculty my_file
```

```
chown root:root my_other_file
```

```
chown cbw:cbw sensitive_date.csv
```

```
chown cbw:faculty program.py
```

Who May Change Ownership?

```
abhi@DESKTOP:~$ groups
abhi faculty
abhi@DESKTOP:~$ ls -l
-rw-rw-rw- 1 abhi abhi      17 Jan 29 22:46 my_file
-rw-rw-rw- 1 abhi faculty  17 Jan 29 22:46 my_other_file
-rw----- 1 root  root    896 Jan 29 22:47 sensitive_data.csv
-rwxrwx--- 1 root  faculty 313 Jan 29 22:47 program.py
```

- Which operations are permitted?

chown abhi:faculty my_file

chown root:root my_other_file

chown abhi:abhi sensitive_date.csv

chown abhi:faculty program.py

Yes, cbw belongs to the faculty group

No, only root may change file owners!

No, only root may change file owners!

No, only root may change file owners!

Unix Access Control Exercise (1)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file1	file2
user1	r--	rwX
user2	r--	rw-
user3	r--	rw-
user4	rwX	rw-

Unix Access Control Exercise (1)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file1	file2
user1	r--	rwX
user2	r--	rw-
user3	r--	rw-
user4	rwX	rw-

User	Groups
user1	user1
user2	user2
user3	user3
user4	user4

```
~$ ls -l
-rwxr--r-- 1 user4  user4  0 file1
-rwxrw-rw- 1 user1  user1  0 file2
```

Unix Access Control Exercise (2)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file1	file2
user1	r--	--x
user2	r-x	rwX
user3	r-x	r--
user4	rwX	r--

Unix Access Control Exercise (2)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file1	file2
user1	r--	--x
user2	r-x	rwX
user3	r-x	r--
user4	rwX	r--

User	Groups
user1	user1
user2	user2, group1
user3	user3, group1, group2
user4	user4, group2

```
~$ ls -l
-rwxr-xr-- 1 user4  group1  0 file1
-rwxr-----x 1 user2  group2  0 file2
```


Unix Access Control Exercise (3)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file 1	file 2
user 1	---	rw-
user 2	r--	r--
user 3	rwX	rwX
user 4	rwX	---

Unix Access Control Exercise (3)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file 1	file 2
user 1	---	rw-
user 2	r--	r--
user 3	rwX	rwX
user 4	rwX	---

- Trick question! This matrix **cannot** be represented

Unix Access Control Exercise (3)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file 1	file 2
user 1	---	rw-
user 2	r--	r--
user 3	rwX	rwX
user 4	rwX	---

- Trick question! This matrix **cannot** be represented
- *file2*: four distinct privilege levels
 - Maximum of three levels (user, group, other)

Unix Access Control Exercise (3)

- What Unix group and permission assignments satisfy this access control matrix?

Desired Permissions

	file 1	file 2
user 1	---	rw-
user 2	r--	r--
user 3	rwX	rwX
user 4	rwX	---

- Trick question! This matrix **cannot** be represented
- *file2*: four distinct privilege levels
 - Maximum of three levels (user, group, other)
- *file1*: two users have high privileges
 - If *user3* and *user4* are in a group, how to give *user2* read and *user1* nothing?
 - If *user1* or *user2* are owner, they can grant themselves write and execute permissions :(

Unix Access Control Review

The Good

- Very simple model
 - Owners, groups, and other
 - Read, write, execute
- Relatively simple to manage and understand

The Bad

Unix Access Control Review

The Good

- Very simple model
 - Owners, groups, and other
 - Read, write, execute
- Relatively simple to manage and understand

The Bad

- Not all policies can be encoded!
 - Contrast to ACL

Unix Access Control Review

The Good

- Very simple model
 - Owners, groups, and other
 - Read, write, execute
- Relatively simple to manage and understand

The Bad

- Not all policies can be encoded!
 - Contrast to ACL
- Not quite as simple as it seems
 - setuid

Problems with Principals

setuid

The Confused Deputy Problem

Capability-based Access Control

From Principals to Subjects

- Thus far, we have focused on **principals**
 - What user created/owns an object?
 - What groups does a user belong to?
- What about **subjects**?
 - When you run a program, what permissions does it have?
 - Who is the “owner” of a running program?

Process Owners

```
abhi@DESKTOP:~$ ls -l
-rwxr-xr-x 1 abhi abhi 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ ./my_program.py
...
```

Process Owners

```
abhi@DESKTOP:~$ ls -l
-rwxr-xr-x 1 abhi abhi 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ ./my_program.py
...
```

Who is the
owner of this
process?

Process Owners

```
abhi@DESKTOP:~$ ls -l
-rwxr-xr-x 1 abhi abhi 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ ./my_program.py
...
```

Who is the
owner of this
process?

```
abhi@DESKTOP:~$ ps aux | grep my_program.py
abhi      tty1      S          01:06   0:00 python3 ./my_program.py
```

Process Owners

```
abhi@DESKTOP:~$ ls -l
-rwxr-xr-x 1 abhi abhi 313 Jan 29 22:47 my_program.py
abhi@DESKTOP:~$ ./my_program.py
...
```

abhi is the
owner. Why?

Who is the
owner of this
process?

```
abhi@DESKTOP:~$ ps aux | grep my_program.py
abhi      tty1      S          01:06   0:00 python3 ./my_program.py
```


Process Owners

```
abhi@DESKTOP:~$ ls -l /bin/ls*
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/ls
-rwxr-xr-x 1 root root 44688 Nov 23 2016 /bin/lsblk
abhi@DESKTOP:~$ ls
...
```

Process Owners

```
abhi@DESKTOP:~$ ls -l /bin/ls*  
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/ls  
-rwxr-xr-x 1 root root 44688 Nov 23 2016 /bin/lsblk  
abhi@DESKTOP:~$ ls
```


...

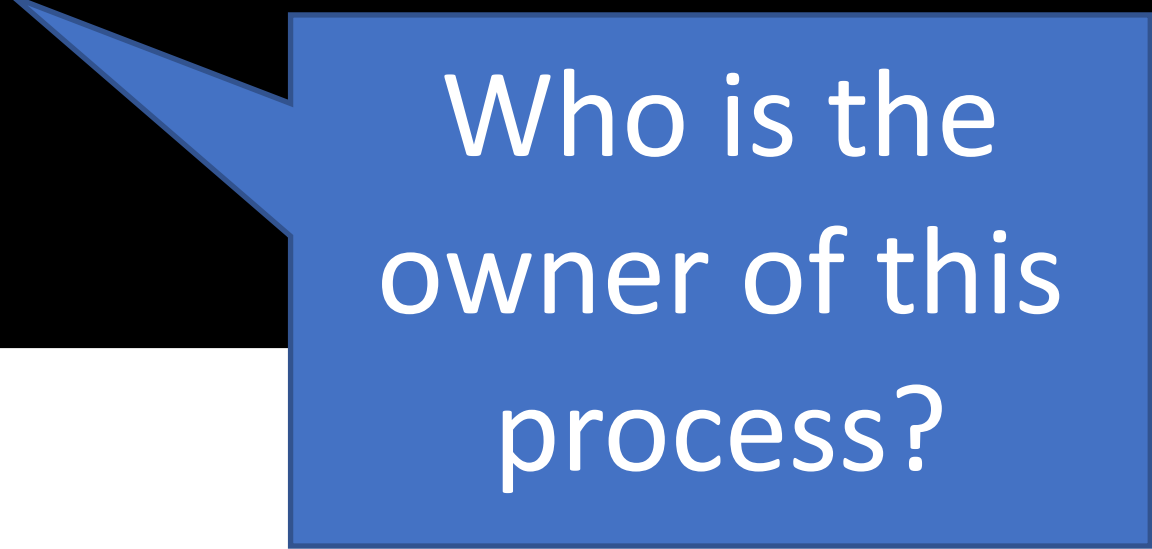

Who is the
owner of this
process?

Process Owners

```
abhi@DESKTOP:~$ ls -l /bin/ls*
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/ls
-rwxr-xr-x 1 root root 44688 Nov 23 2016 /bin/lsblk
abhi@DESKTOP:~$ ls
...
```

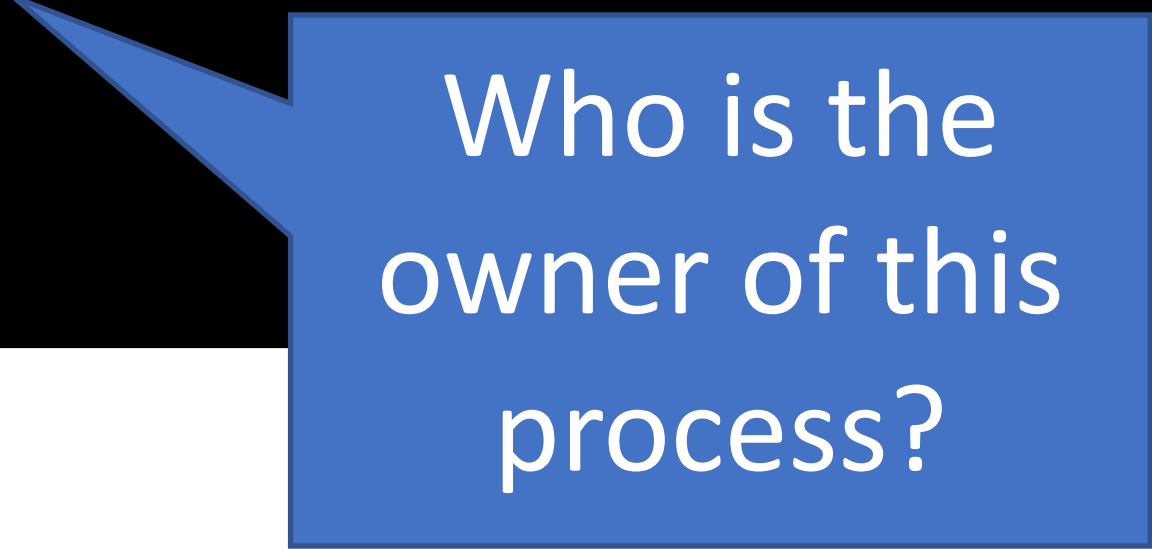

Who is the owner of this process?

```
abhi@DESKTOP:~$ ps aux | grep ls
abhi      tty1      S        01:06   0:00 /bin/ls
```


Process Owners

```
abhi@DESKTOP:~$ ls -l /bin/ls*  
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/ls  
-rwxr-xr-x 1 root root 44688 Nov 23 2016 /bin/lsblk  
abhi@DESKTOP:~$ ls  
...
```

Who is the owner of this process?

abhi is the owner. Why?

```
abhi@DESKTOP:~$ ps aux | grep ls  
abhi      tty1      S          01:06   0:00 /bin/ls
```

Process Owners

```
abhi@DESKTOP:~$ ls -l /bin/ls*  
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/ls  
-rwxr-xr-x 1 root root 44688 Nov 23 2016 /bin/lsblk  
abhi@DESKTOP:~$ ls
```

Who is the owner of this process?

abhi is the owner. Why?

```
abhi@DESKTOP:~$ ps aux | grep ls  
abhi      tty1      S          01:06   0:00 /bin/ls
```

Subject Ownership

Subject Ownership

- Under normal circumstances, subjects are owned by the principal that executes them
 - **File ownership is irrelevant**
- Why is this important for security?
 - A principal that is able to execute a file owned by root should not be granted root privileges

Subject Ownership

- Under normal circumstances, subjects are owned by the principal that executes them
 - **File ownership is irrelevant**
- Why is this important for security?
 - A principal that is able to execute a file owned by root should not be granted root privileges

```
abhi@DESKTOP:~$ ls -l /bin/bash
-rwxr-xr-x 1 root root 110080 Mar 10 2016 /bin/bash
```

Corner Cases

```
abhi@DESKTOP:~$ passwd  
Changing password for abhi.  
(current) UNIX password:
```

Corner Cases

```
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```

- Consider the *passwd* program
 - All users must be able to execute it (to set and change their passwords)
 - Must have write access to */etc/shadow* (file where password hashes are stored)
- Problem: */etc/shadow* is only writable by root user

```
abhi@DESKTOP:~$ ls -l /etc/shadow
-rw-r----- 1 root shadow 922 Jan  8 14:56 /etc/shadow
```

setuid

```
abhi@DESKTOP:~$ ls -l /usr/bin/passwd
-rwsr-xr-x 1 root root 47032 May 16 2017 /usr/bin/passwd
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```


setuid

```
abhi@DESKTOP:~$ ls -l /usr/bin/passwd
-rwsr-xr-x 1 root root 47032 May 16 2017 /usr/bin/passwd
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```

setuid

- Objects may have the *setuid* permission
 - Program may execute as the **file owner**, rather than **executing principal**

```
abhi@DESKTOP:~$ ls -l /usr/bin/passwd
-rwsr-xr-x 1 root root 47032 May 16 2017 /usr/bin/passwd
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```

setuid

- Objects may have the *setuid* permission
 - Program may execute as the **file owner**, rather than **executing principal**

```
abhi@DESKTOP:~$ ls -l /usr/bin/passwd
-rwsr-xr-x 1 root root 47032 May 16 2017 /usr/bin/passwd
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```

```
abhi@DESKTOP:~$ ps aux | grep passwd
root      tty1      S        01:06    0:00 python ./my_program.py
```

setuid

- Objects may have the *setuid* permission
 - Program may execute as the **file owner**, rather than **executing principal**

```
abhi@DESKTOP:~$ ls -l /usr/bin/passwd
-rwsr-xr-x 1 root root 47032 May 16 2017 /usr/bin/passwd
abhi@DESKTOP:~$ passwd
Changing password for abhi.
(current) UNIX password:
```

```
abhi@DESKTOP:~$ ps aux | grep passwd
root      tty1      S        01:06    0:00 python ./my_program.py
```

chmod Revisited

- How to add *setuid* to an object?

```
chmod u+s <file1> [file2] ...
```

```
chmod 2### <file1> [file2] ...
```

chmod Revisited

- How to add *setuid* to an object?

```
chmod u+s <file1> [file2] ...
```

```
chmod 2### <file1> [file2] ...
```

- **WARNING: NEVER SET A SCRIPT AS SETUID**
 - Only set *setuid* on compiled binary programs
 - Scripts with *setuid* lead to [Time of Check Time of Use \(TOCTOU\)](#) vulnerabilities

Another setuid Example

- Consider an example *turnin* program

`/cs2550/turnin <project #> <in_file> <out_file>`

1. Copies *<in_file>* to *<out_file>*
2. Grades the assignment
3. Writes the grade to `/cs2550/<project#>/grades`

Another setuid Example

- Consider an example *turnin* program

`/cs2550/turnin <project #> <in_file> <out_file>`

1. Copies *<in_file>* to *<out_file>*
 2. Grades the assignment
 3. Writes the grade to `/cs2550/<project#>/grades`
- Challenge: students cannot have write access to project directories or grade files
 - *turnin* program must be *setuid*


```
alice@login:~$ /cs2550/turnin project1 pwcrack.py /cs2550/project1/  
pwcrack.py
```

```
Thank you for turning in project 1.
```

```
alice@login:~$ /cs2550/turnin project1 pwcrack.py /cs2550/project1/  
pwcrack.py
```

```
Thank you for turning in project 1.
```

```
alice@login:~$ ls -l /cs2550/
```

```
drwx--x--x 0 cbw faculty 512 Jan 29 22:46 project1  
-rwsr-xr-x 1 cbw faculty 17 Jan 29 22:46 turnin
```

```
alice@login:~$ /cs2550/turnin project1 pwcrack.py /cs2550/project1/  
pwcrack.py
```

```
Thank you for turning in project 1.
```

```
alice@login:~$ ls -l /cs2550/
```

```
drwx--x--x 0 cbw faculty 512 Jan 29 22:46 project1  
-rwsr-xr-x 1 cbw faculty 17 Jan 29 22:46 turnin
```

```
alice@login:~$ ls -l /cs2550/project1/
```

```
-r-x----- 0 cbw faculty 512 Jan 29 22:46 pwcrack.py  
-rw----- 1 cbw faculty 17 Jan 29 22:46 grades
```

Ambient Authority



Ambient Authority

- **Ambient authority**
 - A subject's permissions are automatically exercised
 - No need to select specific permissions
- Systems that use ACLs or Unix-style permissions grant ambient authority
 - A subject automatically gains all permissions of the principal
 - A setuid subject also gains permissions of the file owner
- Ambient authority is a security vulnerability



The Confused Deputy Problem

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /cs2550/project1/grades  
Thank you for turning in project 1.  
alice@login:~$ ls -l /cs2550/project1/
```

The Confused Deputy Problem

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /cs2550/project1/grades
Thank you for turning in project 1.
alice@login:~$ ls -l /cs2550/project1/
-rw----- 1 cbw  faculty    17 Jan 29 22:46 grades
```

The Confused Deputy Problem

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /cs2550/project1/grades
Thank you for turning in project 1.
alice@login:~$ ls -l /cs2550/project1/
-rw----- 1 cbw faculty 17 Jan 29 22:46 grades
```

- The *turnin* program is a **confused deputy**
 - It is the deputy of two principals: *mallory* and *cbw*
 - *mallory* cannot directly access */cs2550/project1/grades*
 - However, *cbw* can access */cs2550/project1/grades*

The Confused Deputy Problem

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /cs2550/project1/grades
Thank you for turning in project 1.
alice@login:~$ ls -l /cs2550/project1/
-rw----- 1 cbw faculty 17 Jan 29 22:46 grades
```

- The *turnin* program is a **confused deputy**
 - It is the deputy of two principals: *mallory* and *cbw*
 - *mallory* cannot directly access */cs2550/project1/grades*
 - However, *cbw* can access */cs2550/project1/grades*
- Key problem: the subject cannot tell which principal it is serving when it performs a write

Preventing Confused Deputies

- ACL and Unix-style systems are fundamentally vulnerable to confused deputies
 - Cannot prevent misuse of ambient authority
- Solution: move to **capability**-based access control system



Capabilities

- Encode columns of an access control matrix

ACL for o_2 **s**

	O_1	O_2	O_3
S_1	RW	RX	
S_2	R	RWX	RW
S_3		RWX	

Capabilities

Capabilities

- Encode columns of an access control matrix

ACL for o_2 **s**

	o_1	o_2	o_3
s_1	RW	RX	
s_2	R	RWX	RW
s_3		RWX	

- Encode rows of an access control matrix

Capabilities

	o_1	o_2	o_3
s_1	RW	RX	
s_2	R	RWX	RW
s_3		RWX	

Capabilities for s_1

Capability-based Access Control

- Principals and subjects have capabilities which:
 - Give them access to objects
 - Files, keys, devices, etc.
 - Are transferable and unforgeable tokens of authority
 - Can be passed from principal to subject, and subject to subject
 - Similar to file descriptors
- Why do capabilities solve the confused deputy problem?
 - When attempting to access an object, a capability must be selected
 - Selecting a capability inherently also selects a master

Confused Deputy Revisited

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades
```

Confused Deputy Revisited

Principal	...	/home/mallory/*	/cs2550/project1/grades	...
mallory	...	RWX	---	...

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades
```

Confused Deputy Revisited

Principal	...	/home/mallory/*	/cs2550/project1/grades	...
mallory	...	RWX	---	...

Allow

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades
```

Deny

Confused Deputy Revisited

Principal	...	/home/mallory/*	/cs2550/project1/grades	...
mallory	...	RWX	---	...

Allow

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades  
ERROR: Permission denied to /cs2550/project1/grades
```

Deny

Confused Deputy Revisited

Principal	...	/home/mallory/*	/cs2550/project1/grades	...
mallory	...	RWX	---	...

Allow

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades  
ERROR: Permission denied to /cs2550/project1/grades
```

Deny

- Principal must pass capabilities to objects at invocation time
 - *mallory* has permission to access `best_grade.txt`
 - *mallory* does not have permission to access `/cs2550/project1/grades`

Confused Deputy Revisited

Principal	...	/home/mallory/*	/cs2550/project1/grades	...
mallory	...	RWX	---	...

Allow

```
mallory@login:~$ /cs2550/turnin project1 best_grade.txt /  
cs2550/project1/grades  
ERROR: Permission denied to /cs2550/project1/grades
```

Deny

- Principal must pass capabilities to objects at invocation time
 - *mallory* has permission to access `best_grade.txt`
 - *mallory* does not have permission to access `/cs2550/project1/grades`
- No ambient authority in a capability-based access control system
 - Principal cannot pass a capability it doesn't have

Capabilities vs. ACLs

- Consider two security mechanisms for bank accounts
 1. Identity-based
 - Each account has multiple authorized owners
 - To authenticate, show a valid ID at the bank
 - Once authenticated, you may access all authorized accounts
 2. Token-based
 - When opening an account, you are given a unique hardware key
 - To access an account, you must possess the corresponding key
 - Keys may be passed from person to person

Capabilities vs. ACLs


- Consider two security mechanisms for bank accounts

1. Identity-based

- Each account has multiple authorized owners
- To authenticate, show a valid ID at the bank
- Once authenticated, you may access all authorized accounts

2. Token-based

- When opening an account, you are given a unique hardware key
- To access an account, you must possess the corresponding key
- Keys may be passed from person to person

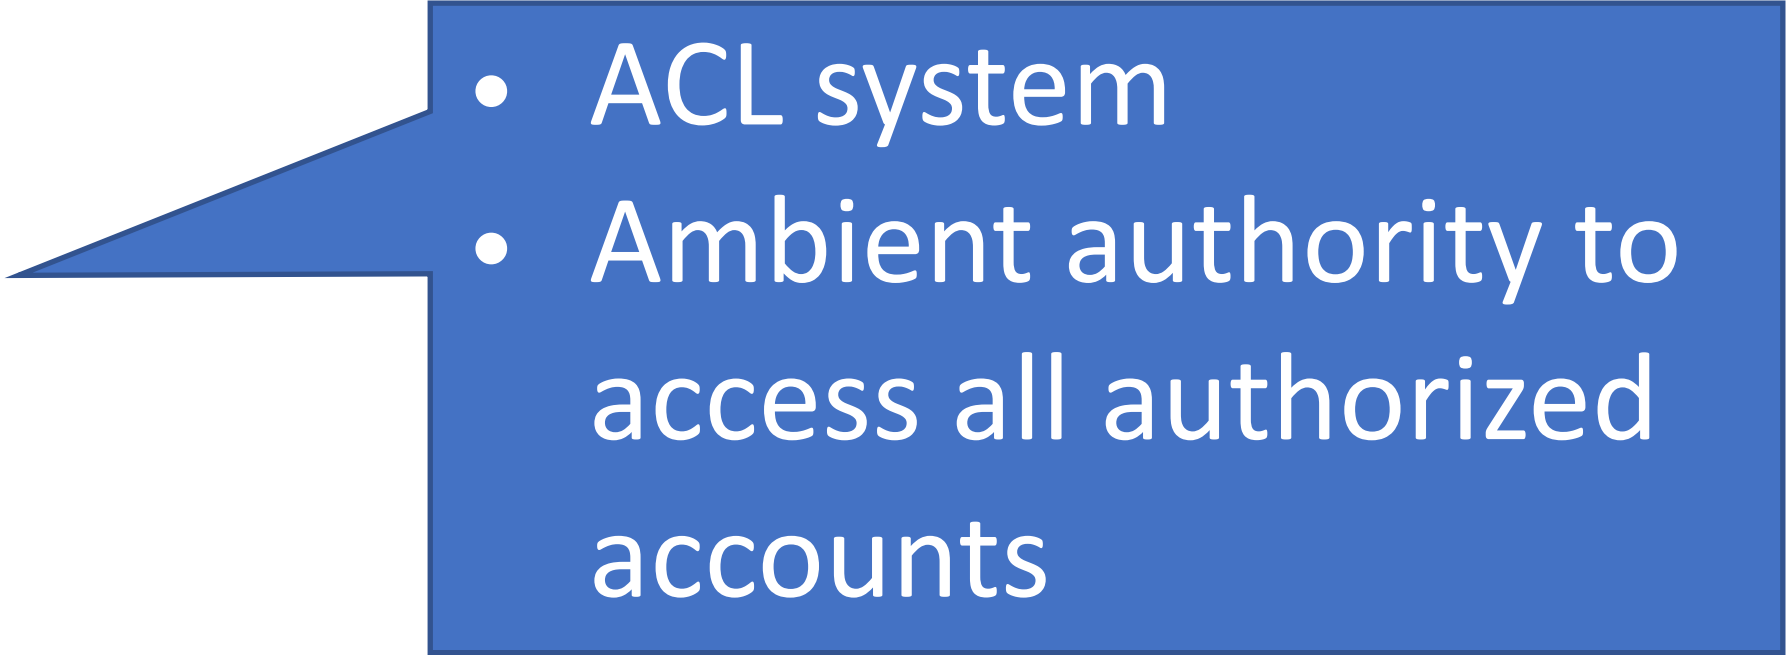- 
- ACL system
 - Ambient authority to access all authorized accounts

Capabilities vs. ACLs

- Consider two security mechanisms for bank accounts

1. Identity-based

- Each account has multiple authorized owners
- To authenticate, show a valid ID at the bank
- Once authenticated, you may access all authorized accounts

- ACL system
- Ambient authority to access all authorized accounts

2. Token-based

- When opening an account, you are given a unique hardware key
- To access an account, you must possess the corresponding key
- Keys may be passed from person to person

- Capability system
- No ambient authority

Capabilities IRL


- From a security perspective, capability systems are more secure than ACL and Unix-style systems
- ... and yet, most major operating systems use the latter
- Why?
 - Easier for users
 - ACLs are good for user-level sharing, intuitive
 - Capabilities are good for process-level sharing, not intuitive
 - Easier for developers
 - Processes are tightly coupled in capability systems
 - Must carefully manage passing capabilities around
 - In contrast, ambient authority makes programming easy, but insecure

Small Steps Towards Capabilities




- Some limited examples of capability systems exist
 - Android/iOS app permissions
 - POSIX capabilities
 - SELinux

Android/iOS Capabilities

- Android and iOS support (relatively) fine grained capabilities for apps
 - User must grant permissions to apps at install time
 - May only access sensitive APIs with user consent
- Apps can “borrow” capabilities from each other by exporting *intents*
 - Example: an app without camera access can ask the camera app to return a photo

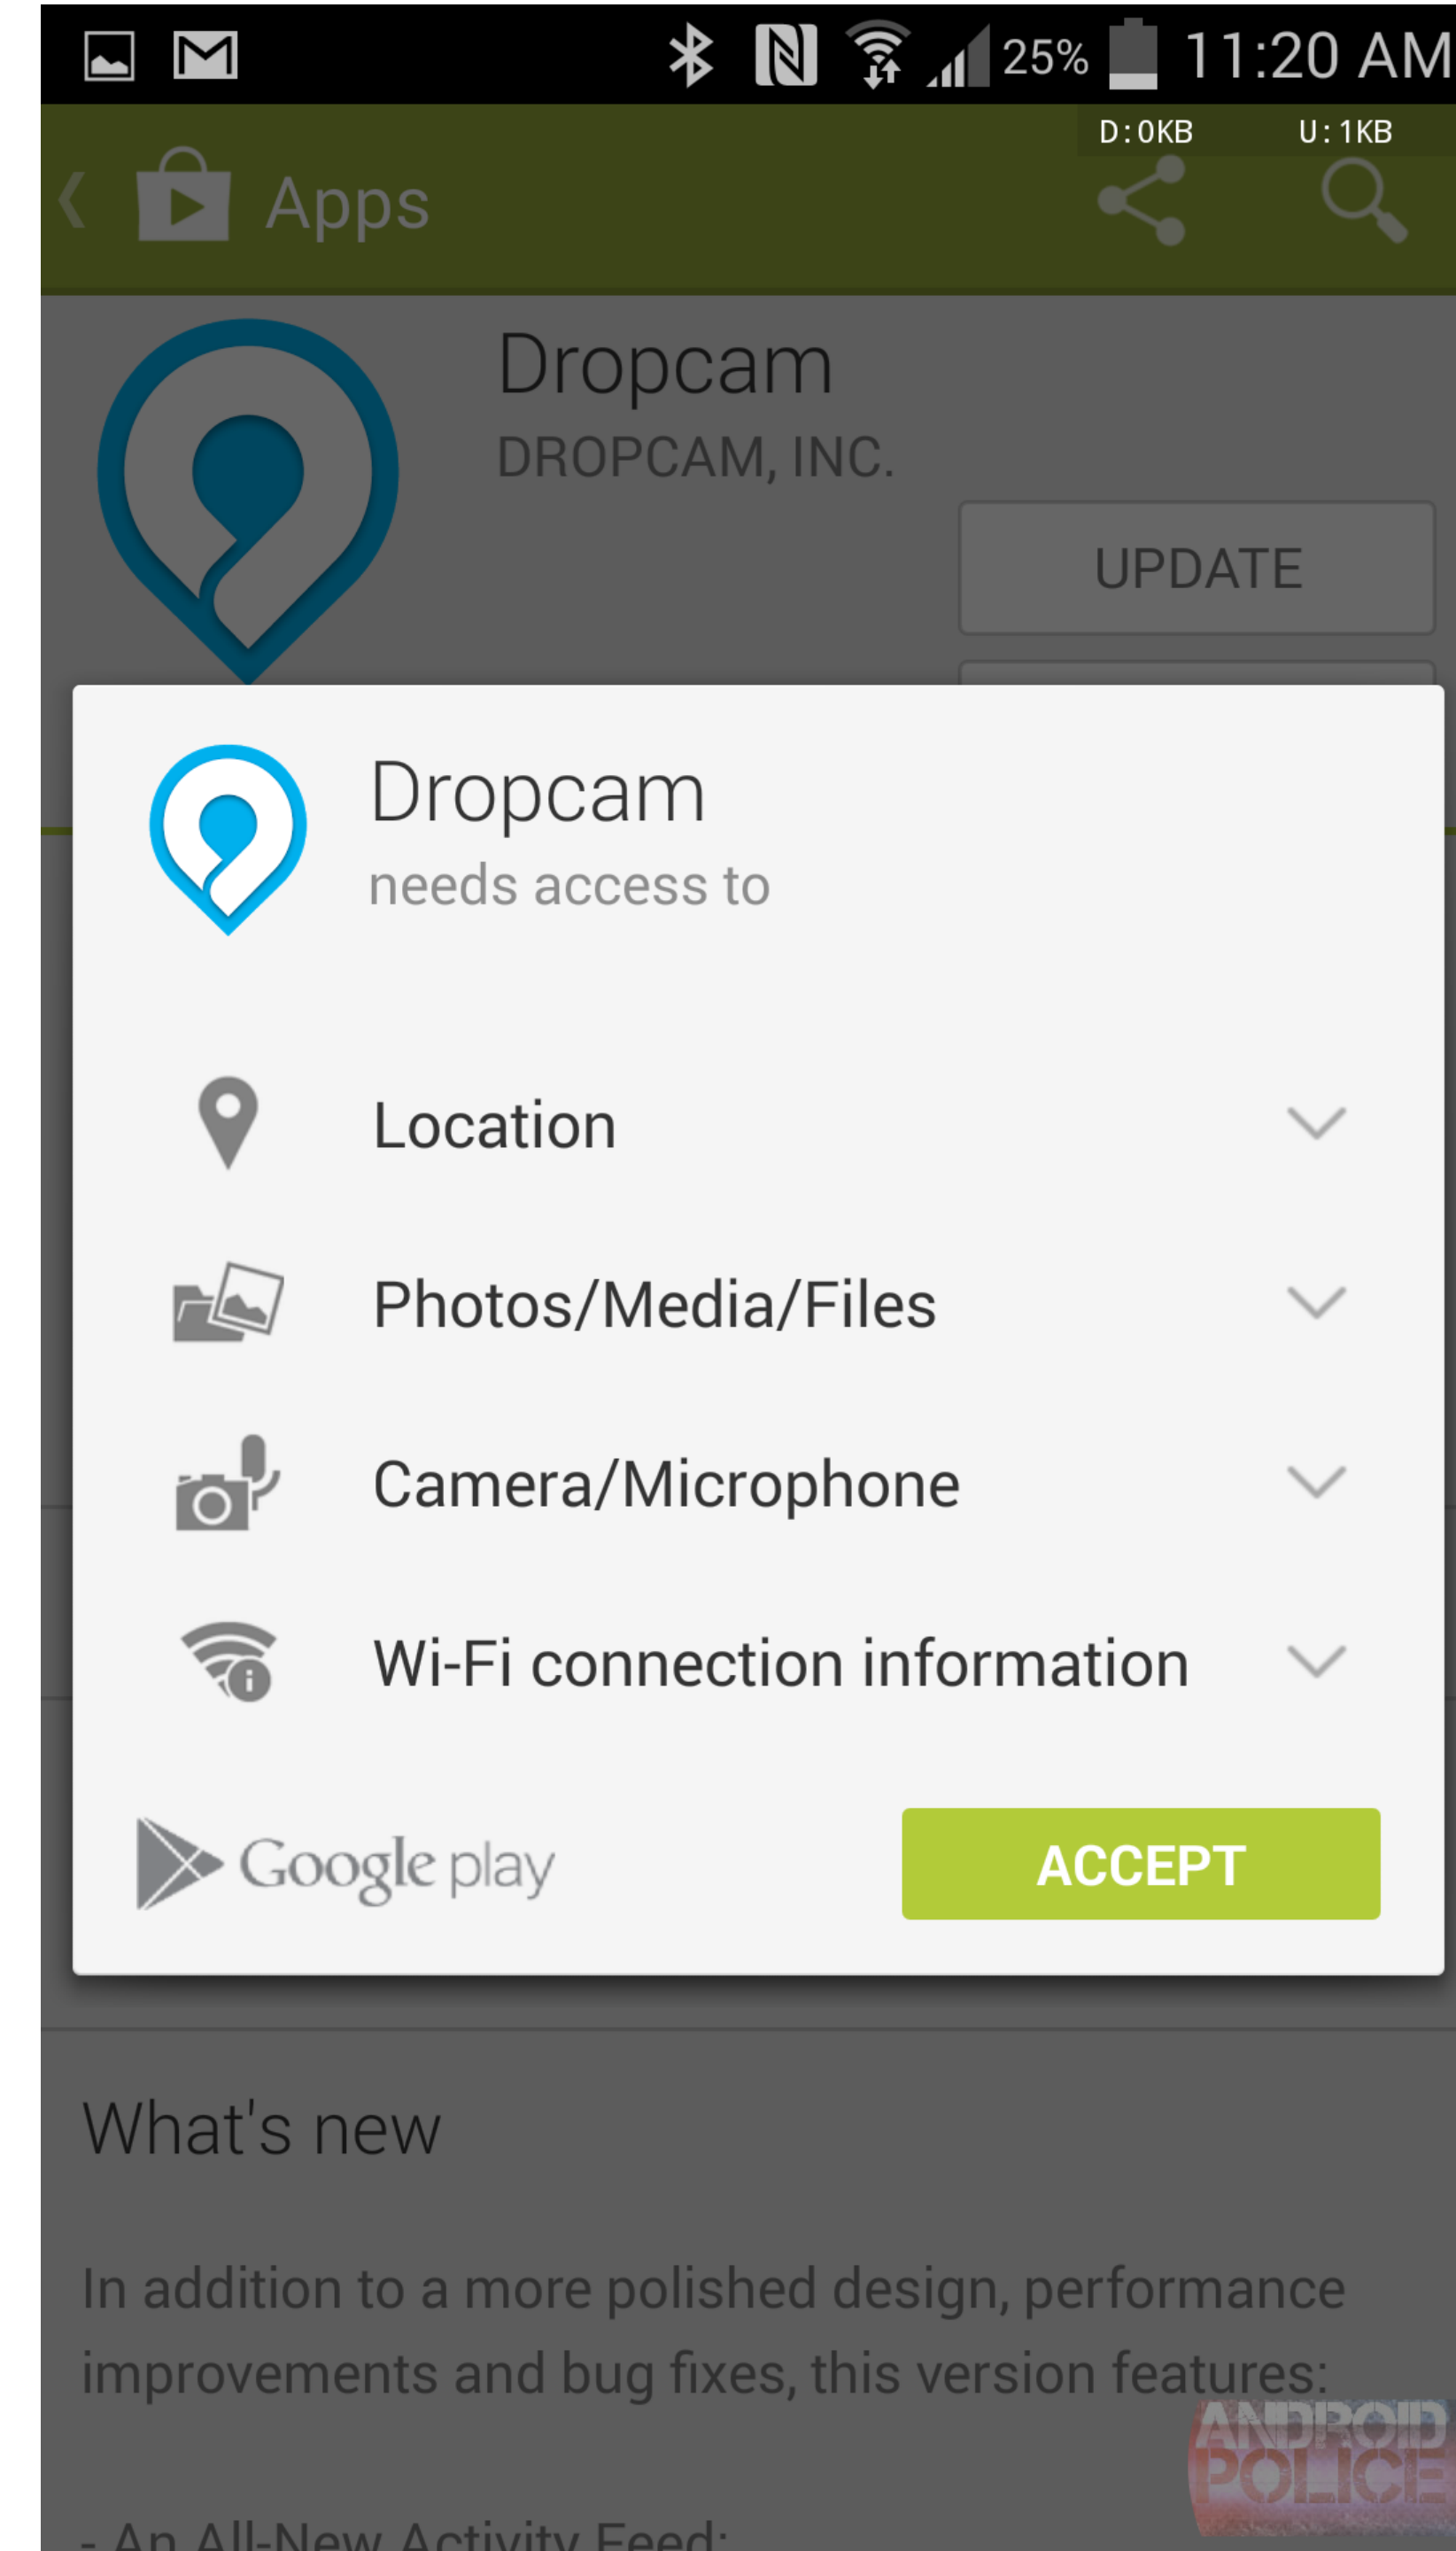

Android/iOS just-in-time capability

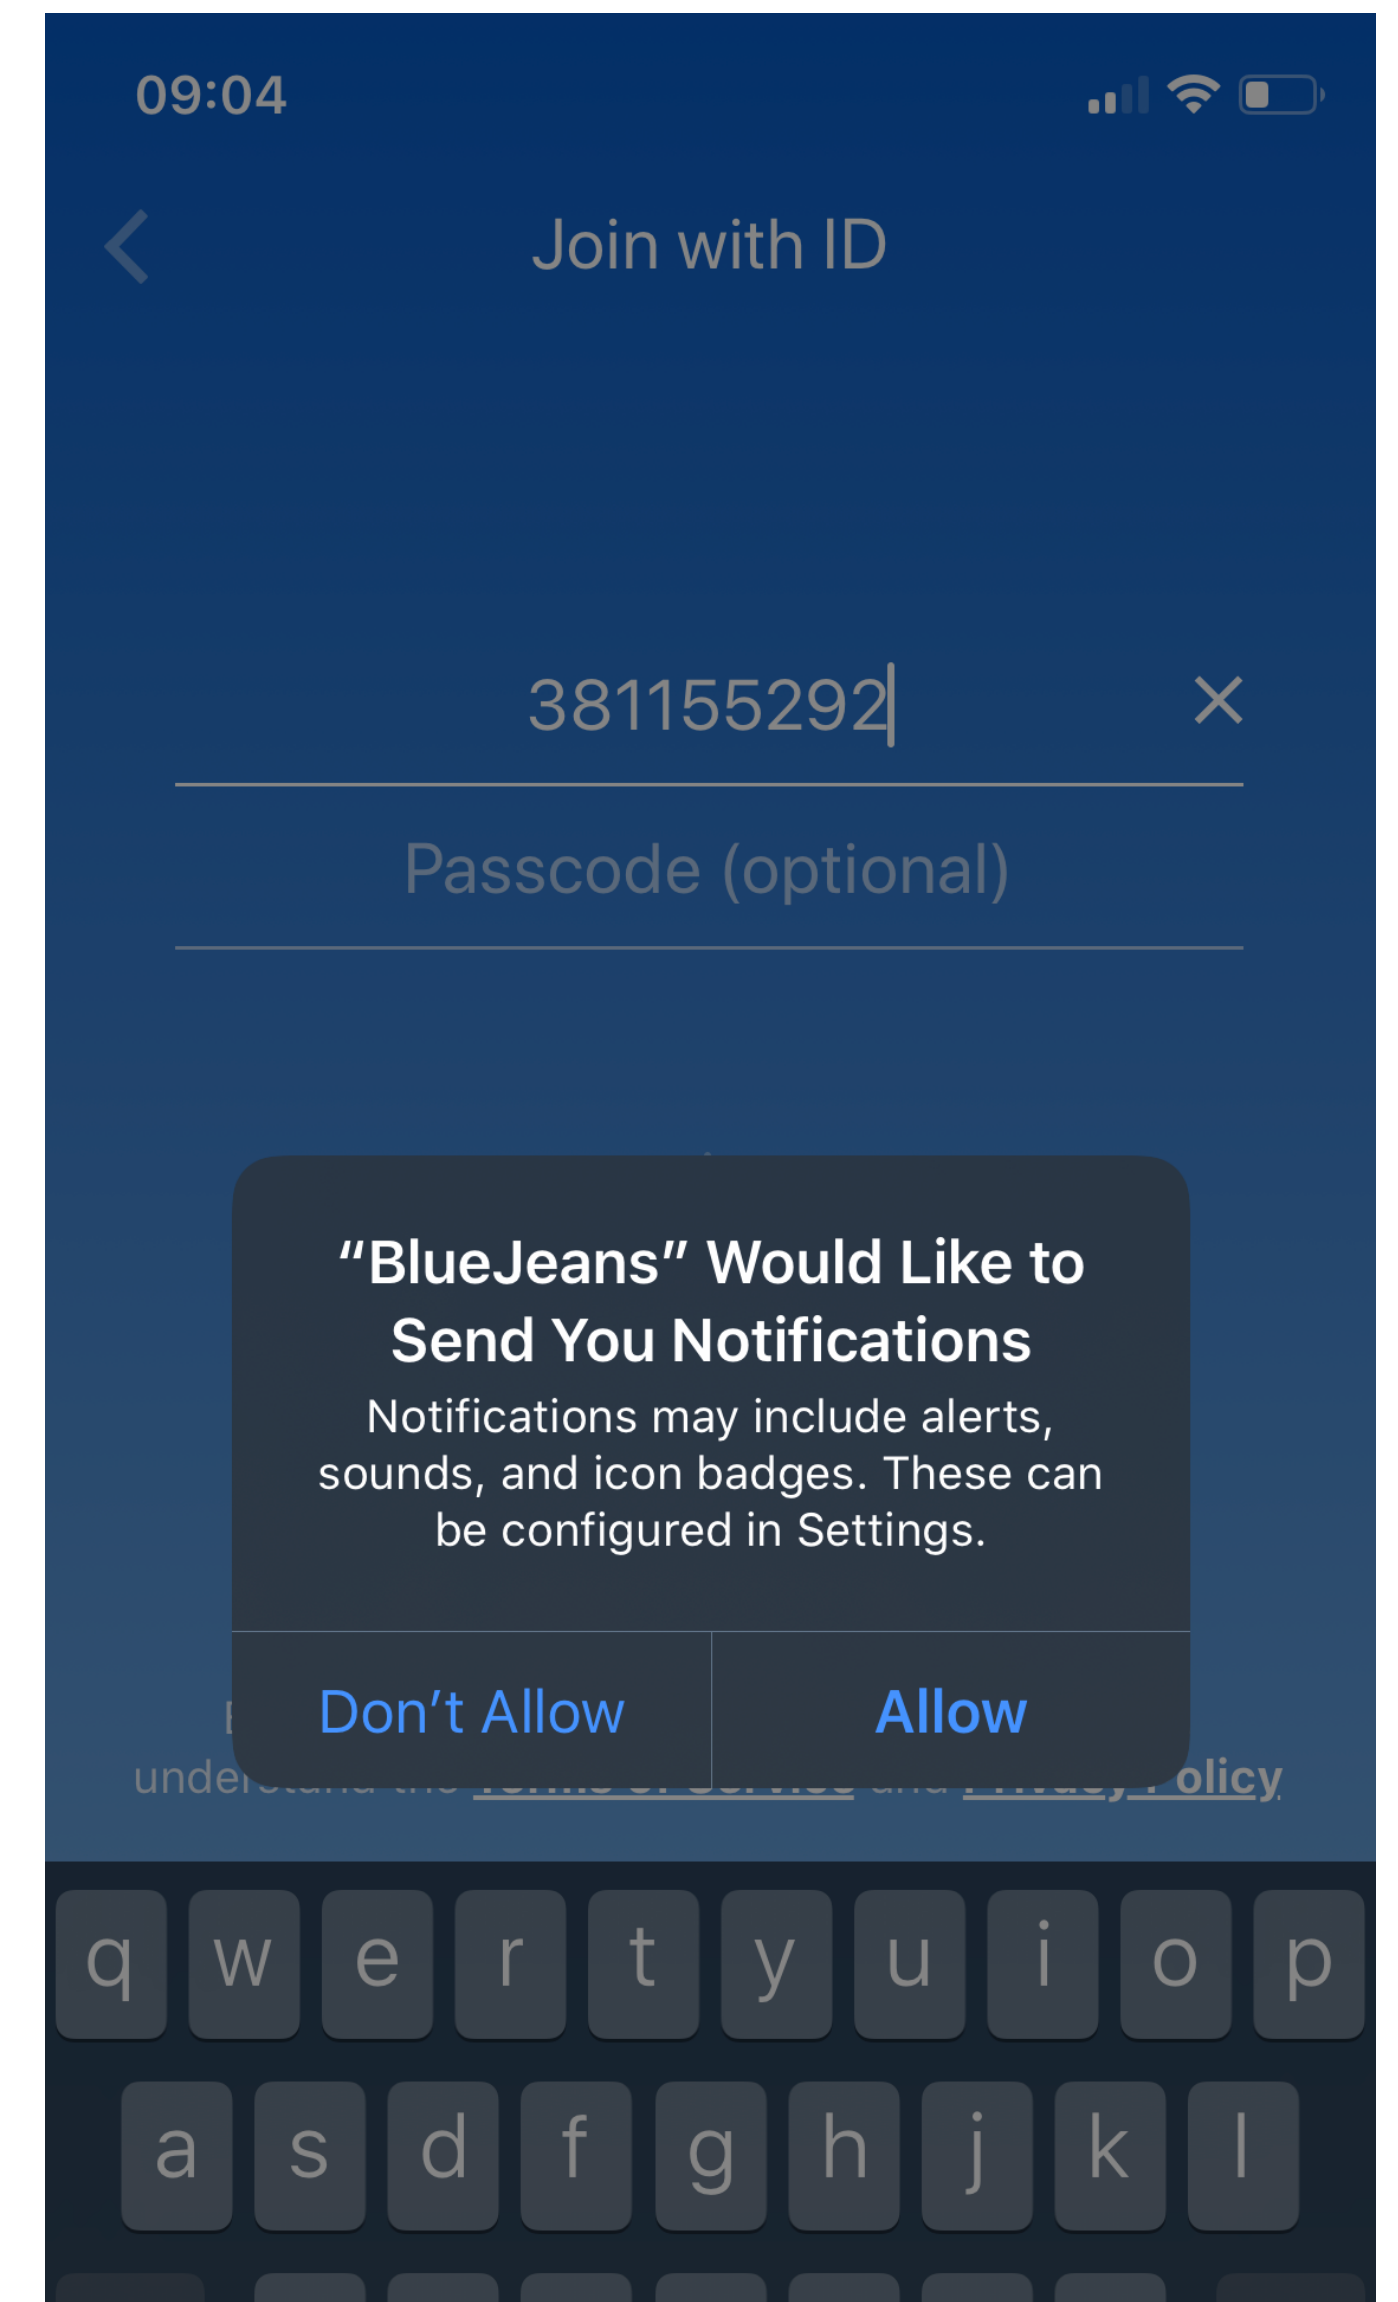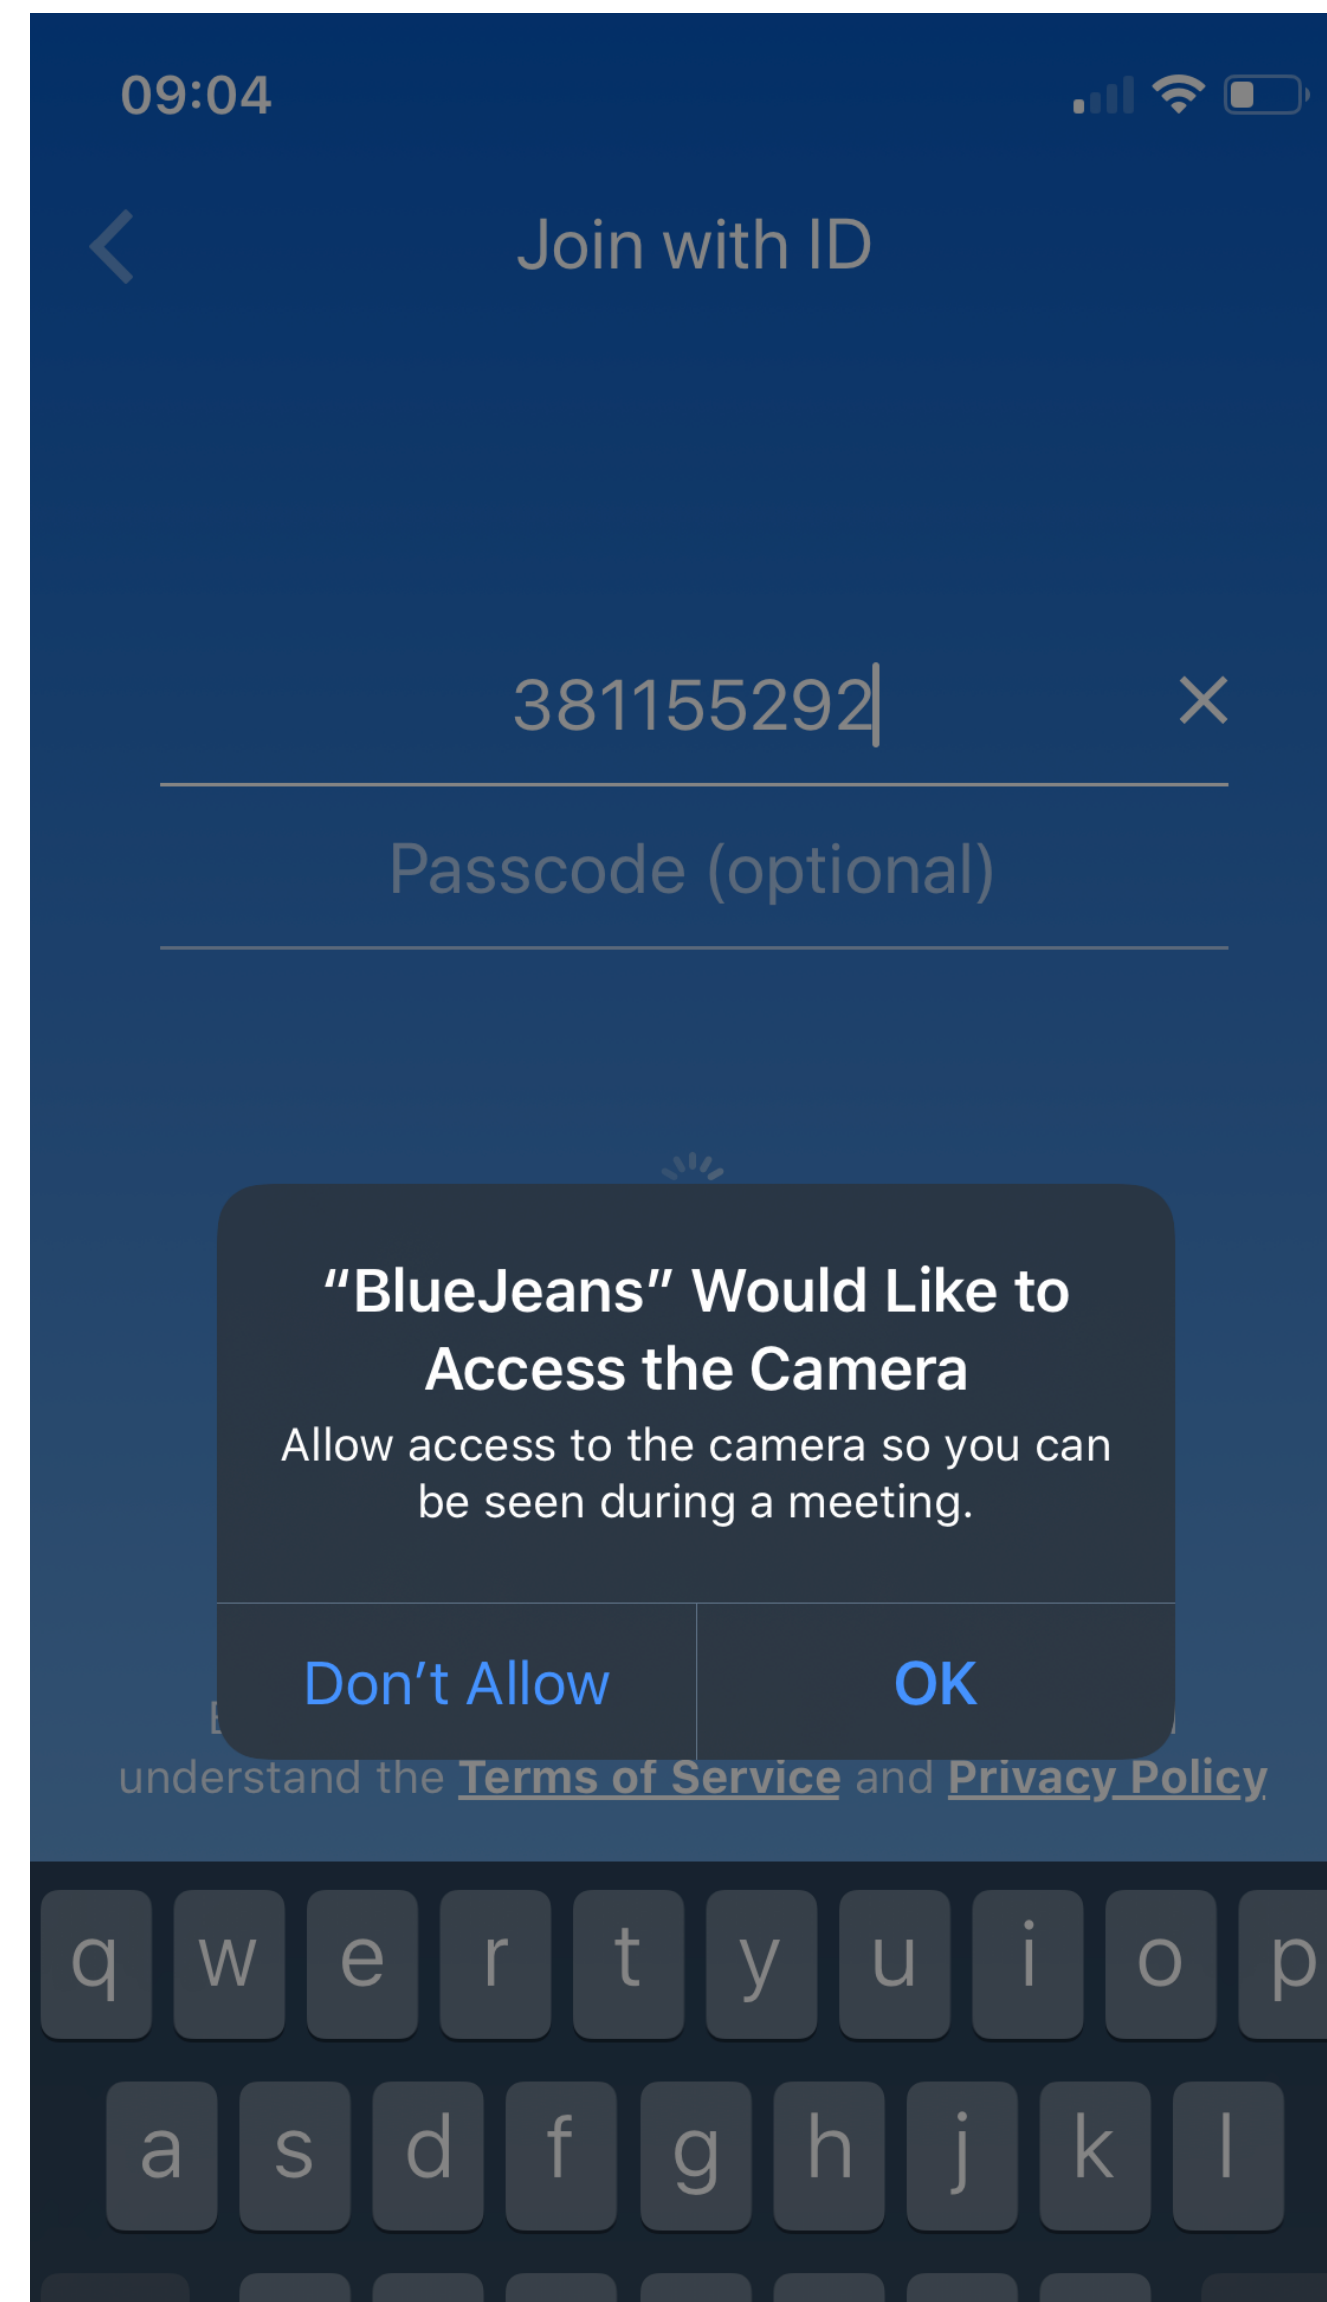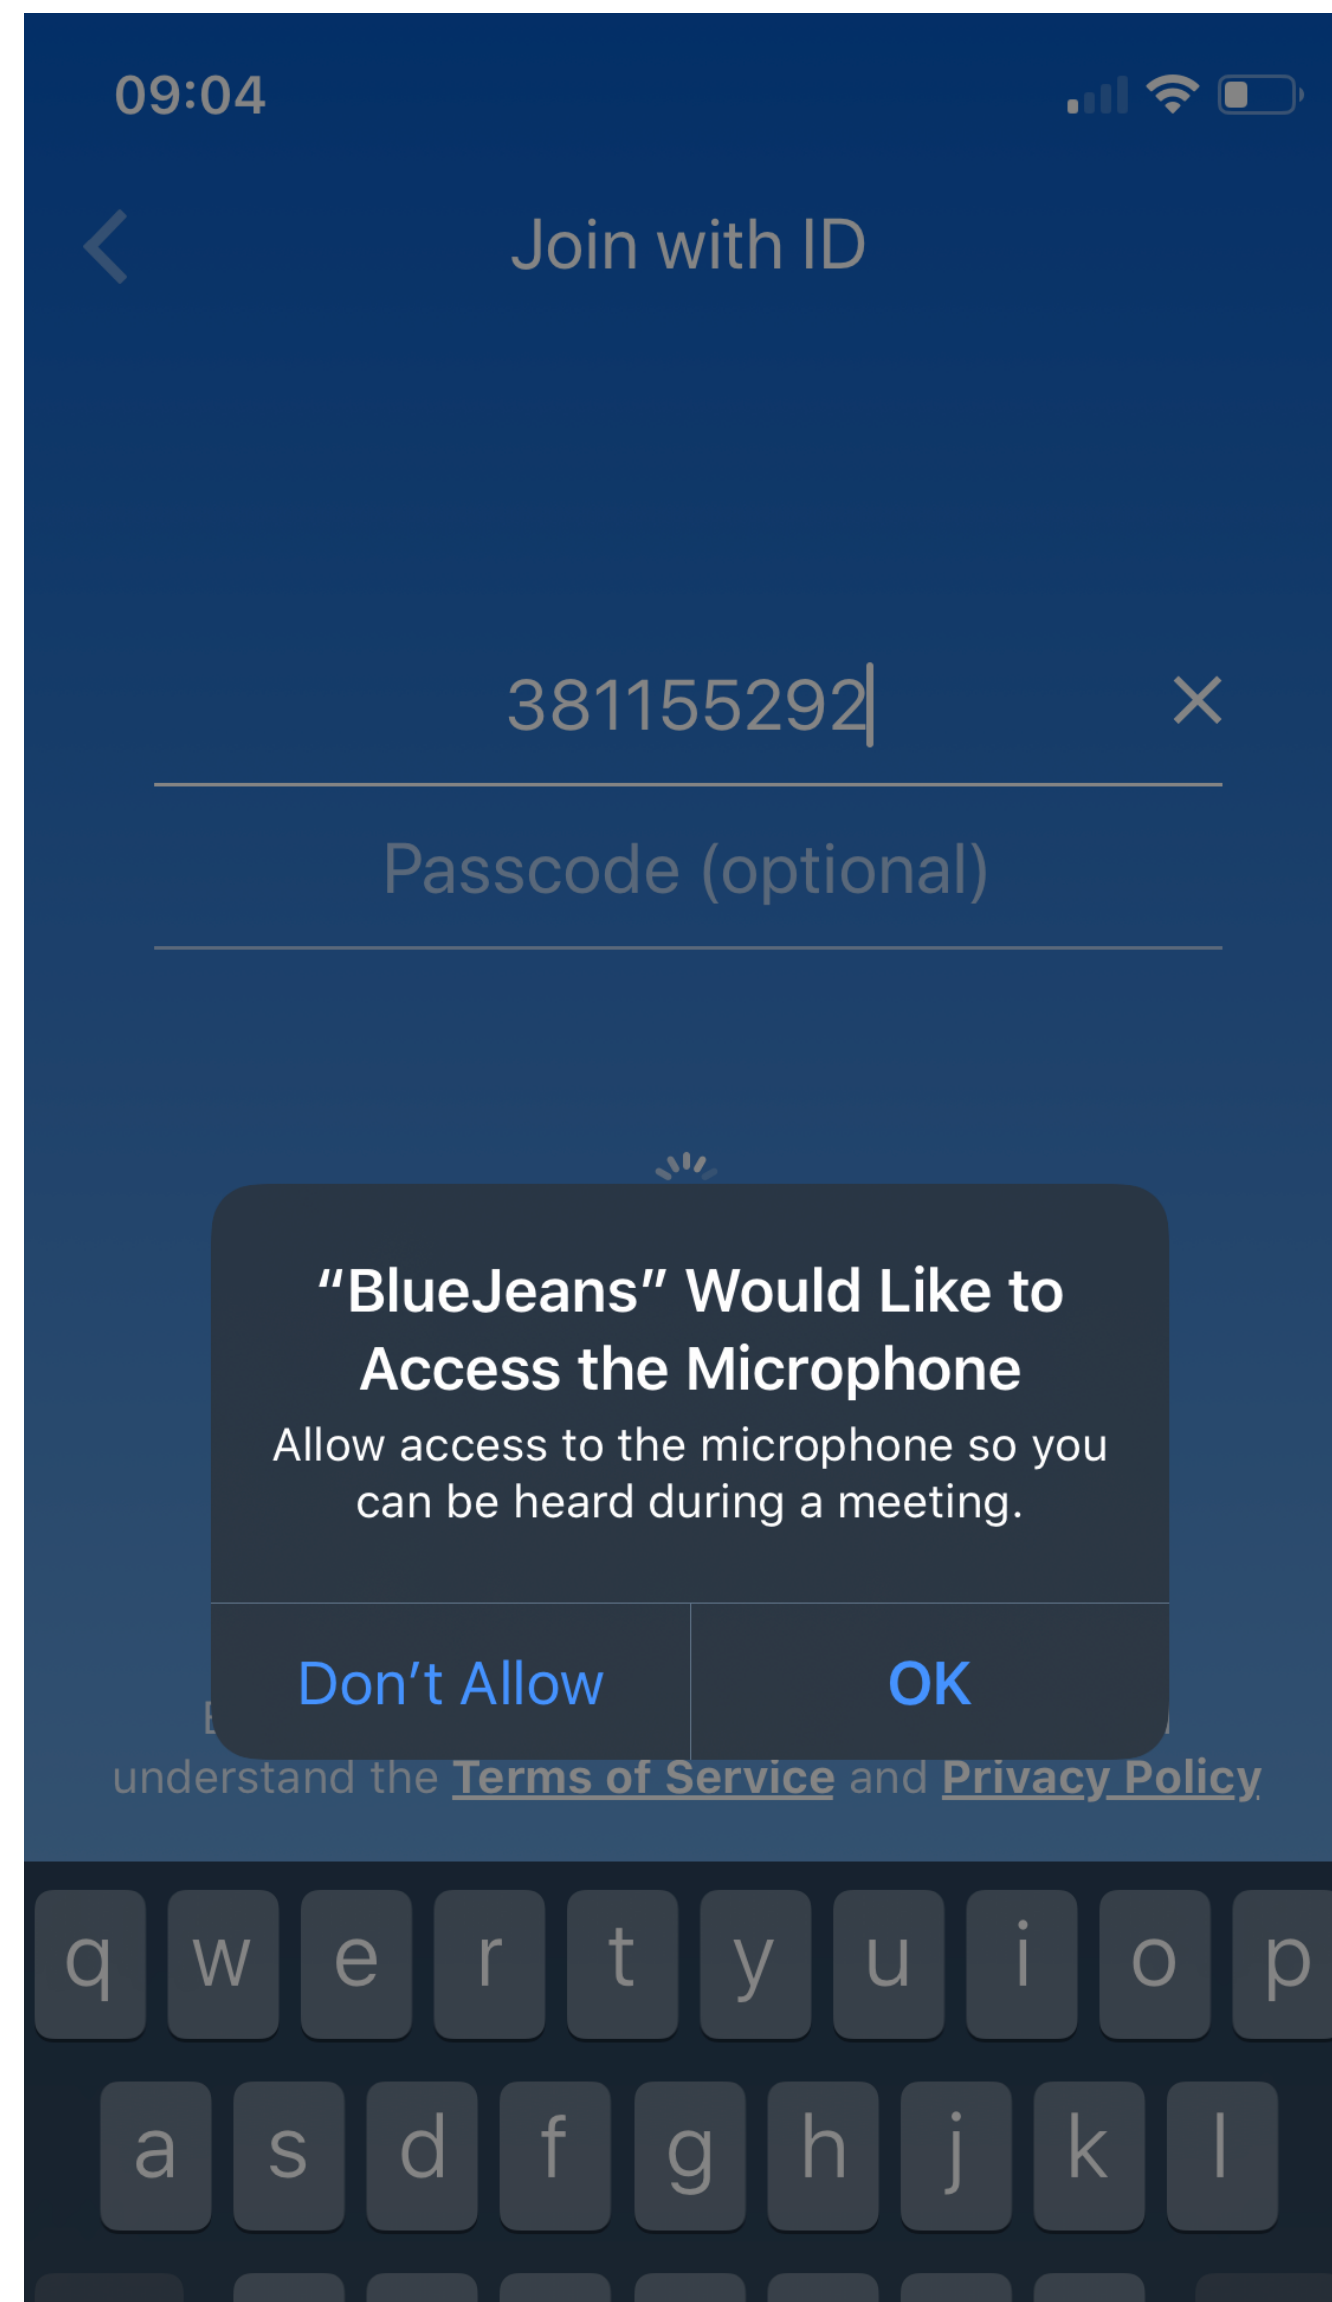

Per-event capability



POSIX Capabilities

- Traditional Unix systems had two types of processes
 - Privileged, i.e. root processes
 - Bypass all security and access control checks
 - Unprivileged, i.e. everything else
 - Subject to access controls
- Modern Unix/Linux systems offer some finer grained capabilities
 - Specified processes may be granted a subset of root privileges
 - CAP_CHOWN: make arbitrary changes to file owners and groups
 - CAP_KILL: kill arbitrary processes
 - CAP_SYS_TIME: change the system clock

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups  
charlie topsecret
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root    512 Jan  8 14:55 .
drwxr-xr-x 0 root root    512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root 512 Jan  8 14:55 .
drwxr-xr-x 0 root root 512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root    512 Jan  8 14:55 .
drwxr-xr-x 0 root root    512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
```


Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root    512 Jan  8 14:55 .
drwxr-xr-x 0 root root    512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root      512 Jan  8 14:55 .
drwxr-xr-x 0 root root      512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
charlie@DESKTOP:~$ ls -la /home/mallory
drwxrwxrwx 0 mallory mallory  512 Jan  8 14:55 .
drwxr-xr-x 0 root      root      512 Oct 11 19:58 ..
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root    512 Jan  8 14:55 .
drwxr-xr-x 0 root root    512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
charlie@DESKTOP:~$ ls -la /home/mallory
drwxrwxrwx 0 mallory mallory  512 Jan  8 14:55 .
drwxr-xr-x 0 root    root    512 Oct 11 19:58 ..
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret

charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root    512 Jan  8 14:55 .
drwxr-xr-x 0 root root    512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf

charlie@DESKTOP:~$ groups mallory
mallory secret

charlie@DESKTOP:~$ ls -la /home/mallory
drwxrwxrwx 0 mallory mallory    512 Jan  8 14:55 .
drwxr-xr-x 0 root    root    512 Oct 11 19:58 ..

charlie@DESKTOP:~$ cp /top-secret-intel/northkorea.pdf /home/mallory
charlie@DESKTOP:~$ ls -l /home/mallory
-rw-r----- 1 charlie charlie 896 Jan 29 22:47 northkorea.pdf

charlie@DESKTOP:~$ chmod ugo+rw /home/mallory/northkorea.pdf
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root 512 Jan 8 14:55 .
drwxr-xr-x 0 root root 512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
charlie@DESKTOP:~$ ls -la /home/mallory
drwxrwxrwx 0 mallory mallory 512 Jan 8 14:55 .
drwxr-xr-x 0 root root 512 Oct 11 19:58 ..
charlie@DESKTOP:~$ cp /top-secret-intel/northkorea.pdf /home/mallory
charlie@DESKTOP:~$ ls -l /home/mallory
-rw-r----- 1 charlie charlie 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ chmod ugo+rw /home/mallory/northkorea.pdf
```

Keeping Secrets?

- Suppose we have secret data that only certain users should access
- Is DAC enough to prevent leaks?

```
charlie@DESKTOP:~$ groups
charlie topsecret
charlie@DESKTOP:~$ ls -la /top-secret-intel/
drwxr-xr-x 0 root root 512 Jan  8 14:55 .
drwxr-xr-x 0 root root 512 Oct 11 19:58 ..
-rw-r----- 1 root topsecret 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ groups mallory
mallory secret
charlie@DESKTOP:~$ ls -la /home/mallory
drwxrwxrwx 0 mallory mallory 512 Jan  8 14:55 .
drwxr-xr-x 0 root root 512 Oct 11 19:58 ..
charlie@DESKTOP:~$ cp /top-secret-intel/northkorea.pdf /home/mallory
charlie@DESKTOP:~$ ls -l /home/mallory
-rw-r----- 1 charlie charlie 896 Jan 29 22:47 northkorea.pdf
charlie@DESKTOP:~$ chmod ugo+rw /home/mallory/northkorea.pdf
```

Failure of DAC

- DAC cannot prevent the leaking of secrets

User A



User B




Secret.pdf
rwx User A
--- User B



NotSecret.pdf
rwx User A
rwx User B


Failure of DAC

- DAC cannot prevent the leaking of secrets

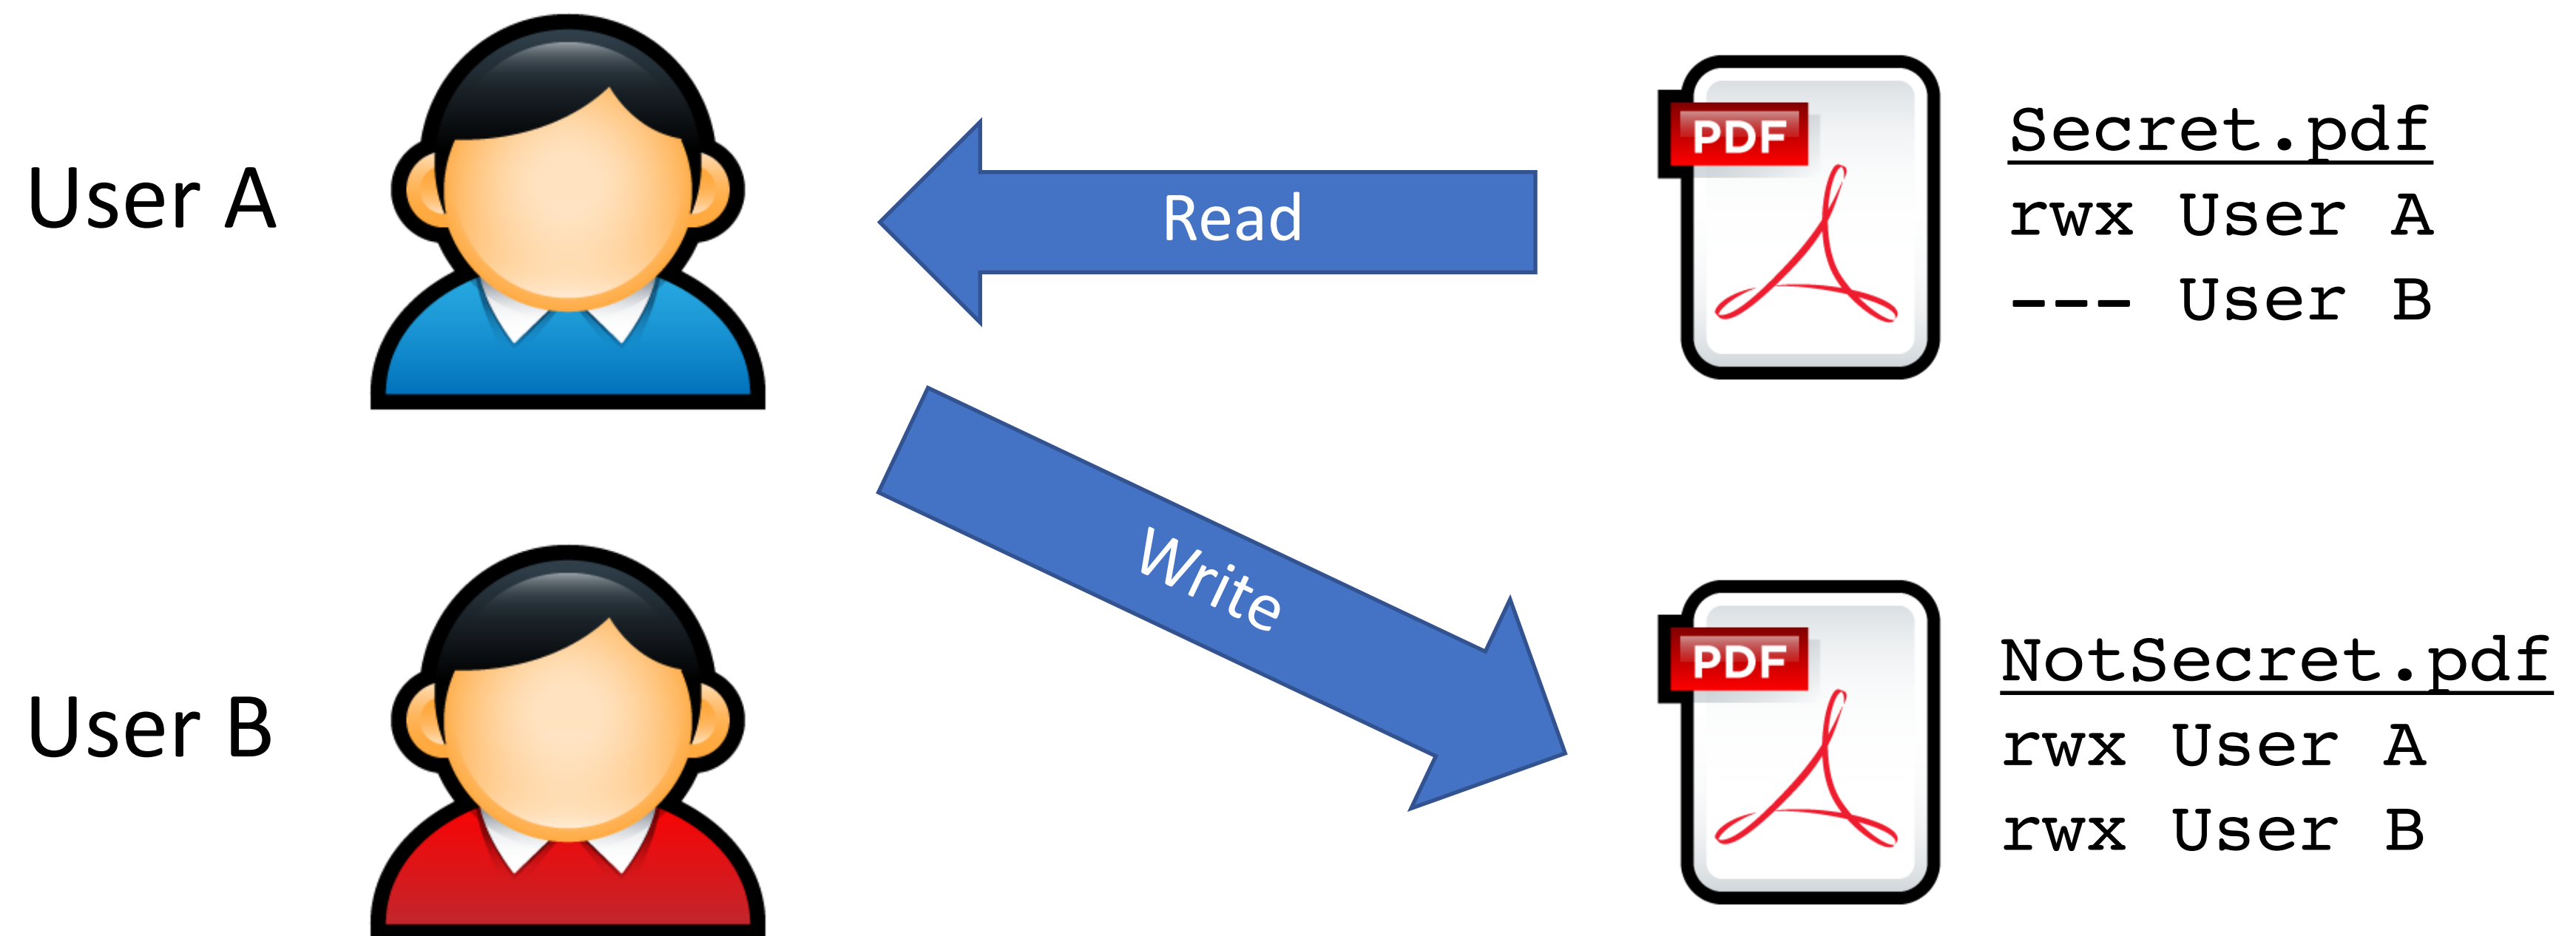

Failure of DAC

- DAC cannot prevent the leaking of secrets

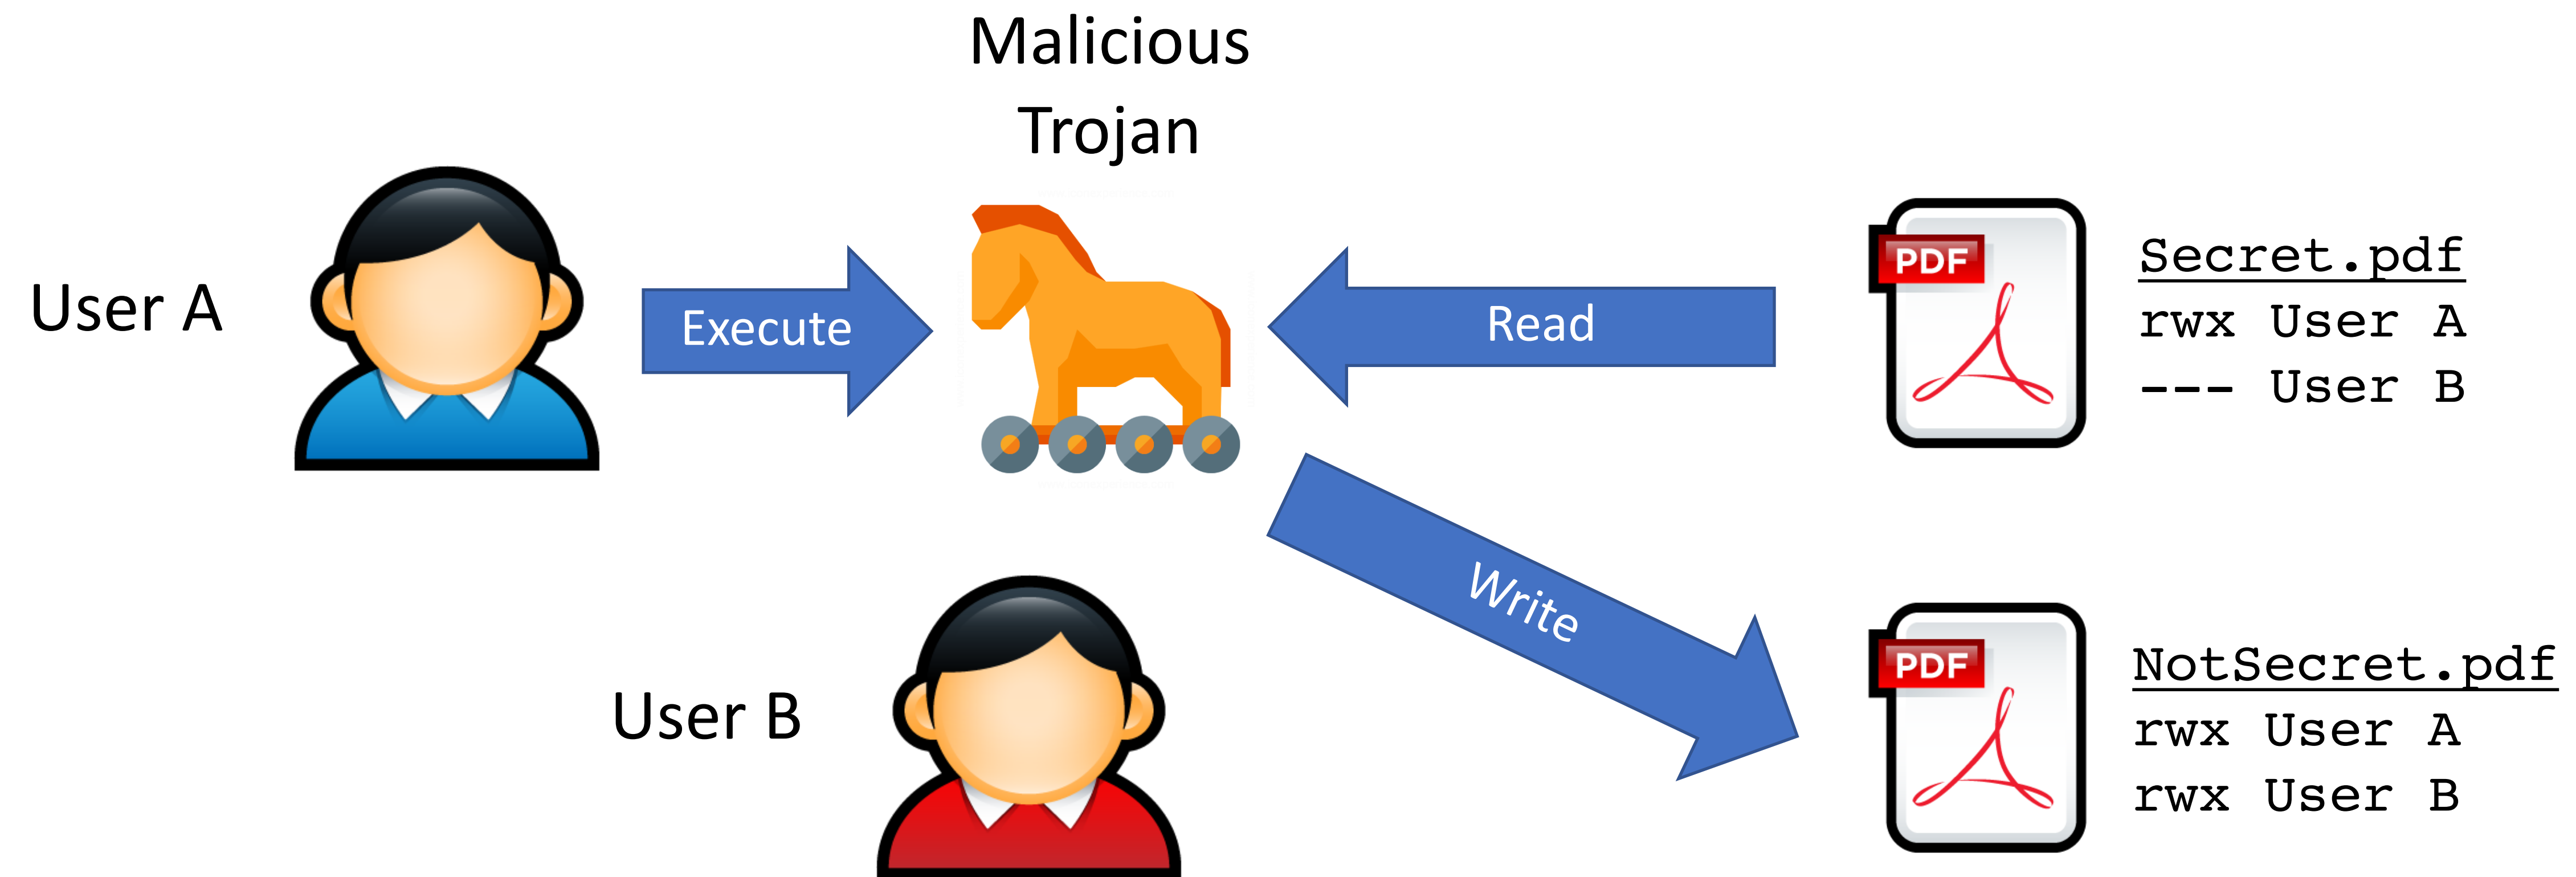

Mandatory Access Control

Mandatory Access Control Goals

- Restrict the access of subjects to objects based on a system-wide policy

Bell-Lapadula (1973)

“No read , no write ”

System Model:


Security Policy:

BLP System Model

Clearances:

Classifications:

BLP System State

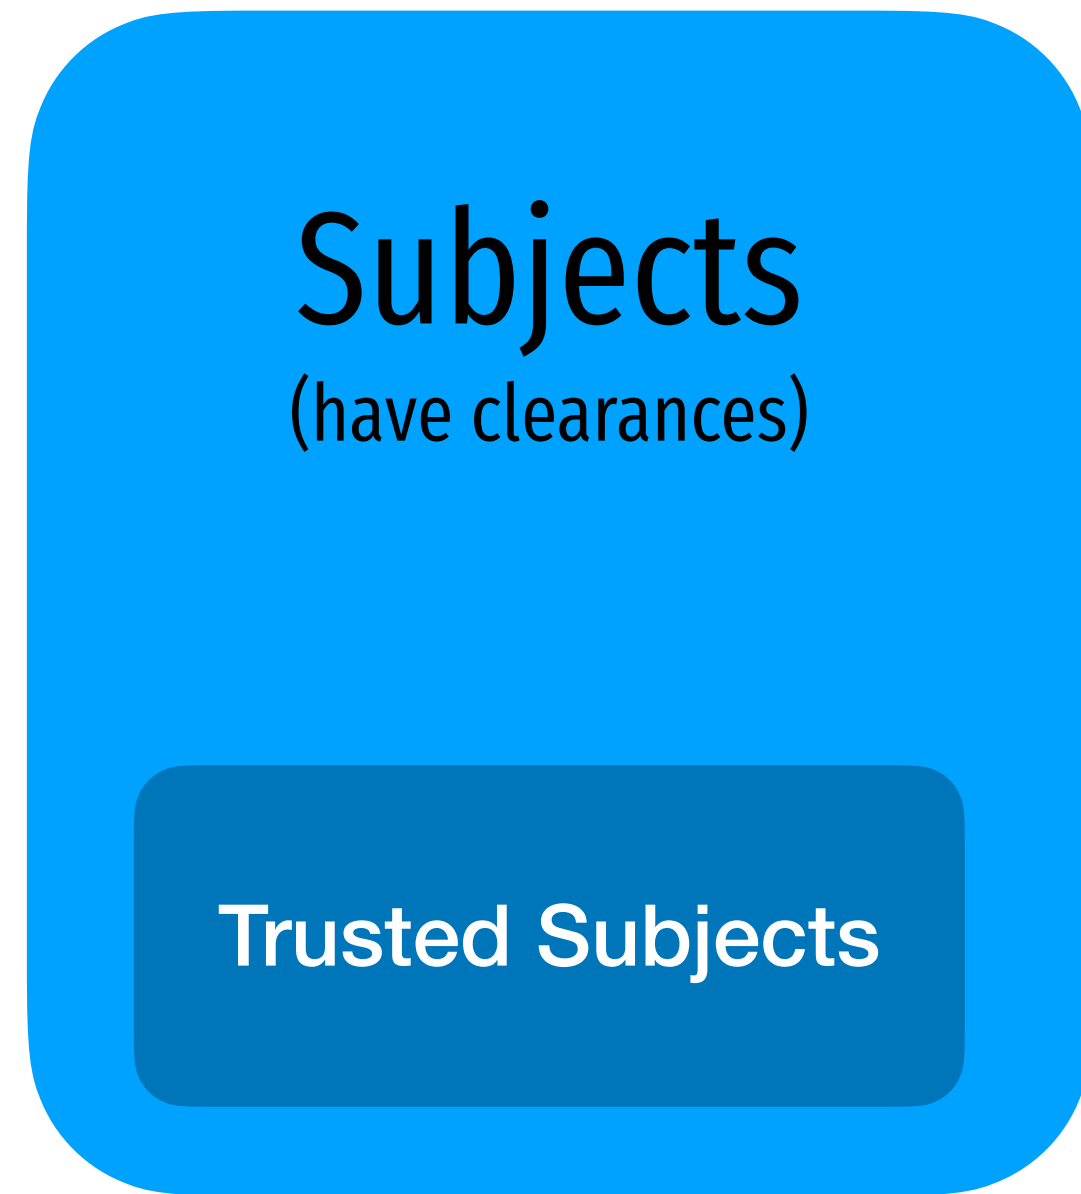

ACL

	O1	O2	O3
S1			
S2			
S3			
S4			

Elements of the Bell-LaPadula Model

Subjects

$L_m(s)$: maximum level

$L_c(s)$: current level

Top Secret



Secret



Confidential



Discretionary Access

Control Matrix

Defined by the administrator

	O ₁	O ₂	O ₃
S ₁	RW	RX	
S ₂	R	RWX	RW
S ₃		RWX	

Objects

$L(o)$: level



Top Secret



Secret



Confidential



Unclassified

Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true



Top Secret



Secret




Confidential



Unclassified

Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true
- ★-property
 - s can read o iff $L(s) \geq L(o)$ (no read up)
 - s can write o iff $L(s) \leq L(o)$ (no write down)

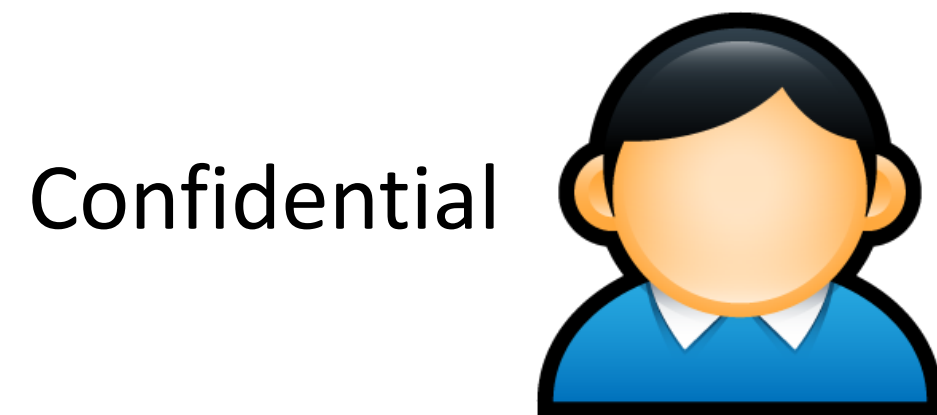

Top Secret



Secret



Confidential




Unclassified

Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true
- ★-property
 - s can read o iff $L(s) \geq L(o)$ (no read up)
 - s can write o iff $L(s) \leq L(o)$ (no write down)


Confidential

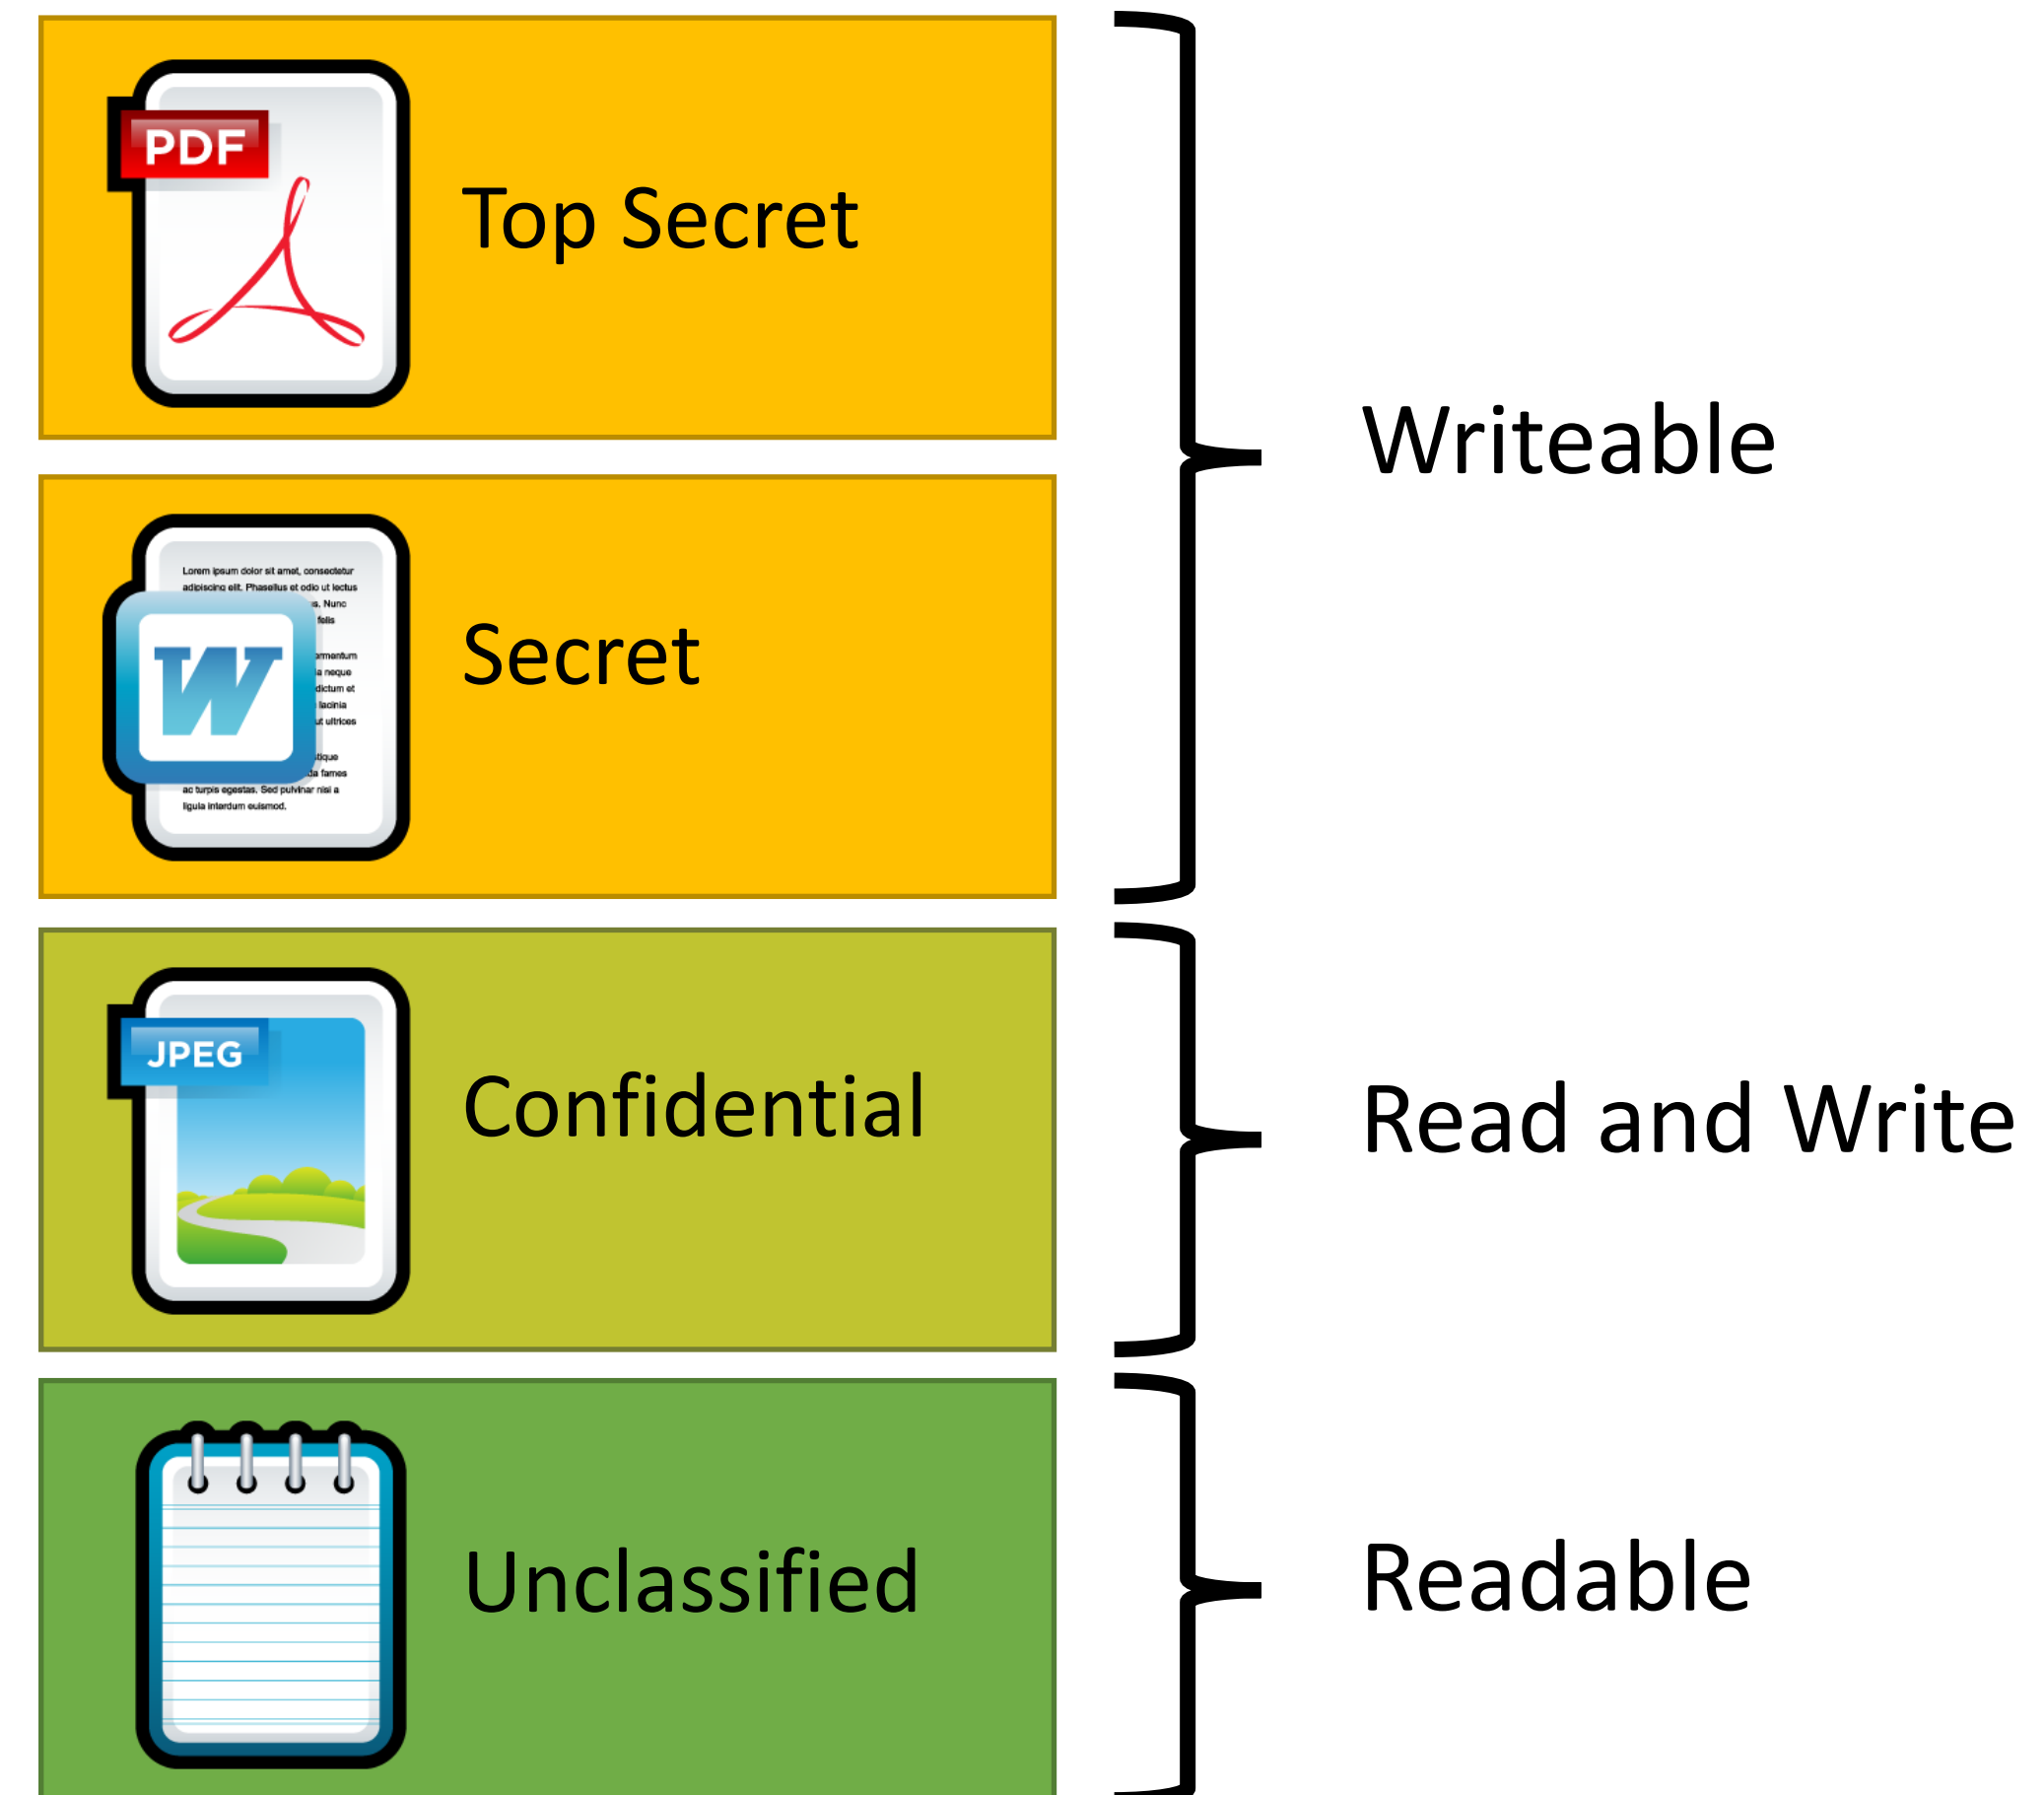

Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true
- ★-property
 - s can read o iff $L(s) \geq L(o)$ (no read up)
 - s can write o iff $L(s) \leq L(o)$ (no write down)

Confidential

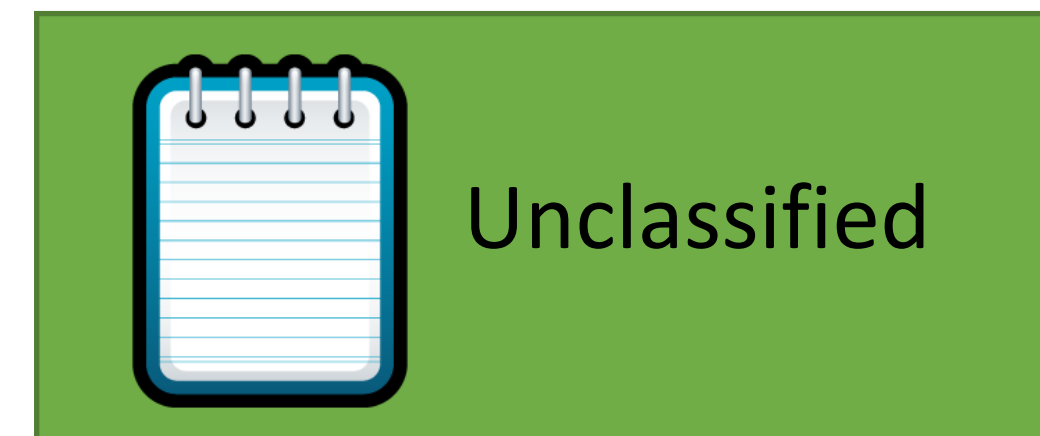


Writeable

Read and Write

Readable


Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true
- ★-property
 - s can read o iff $L(s) \geq L(o)$ (no read up)
 - s can write o iff $L(s) \leq L(o)$ (no write down)

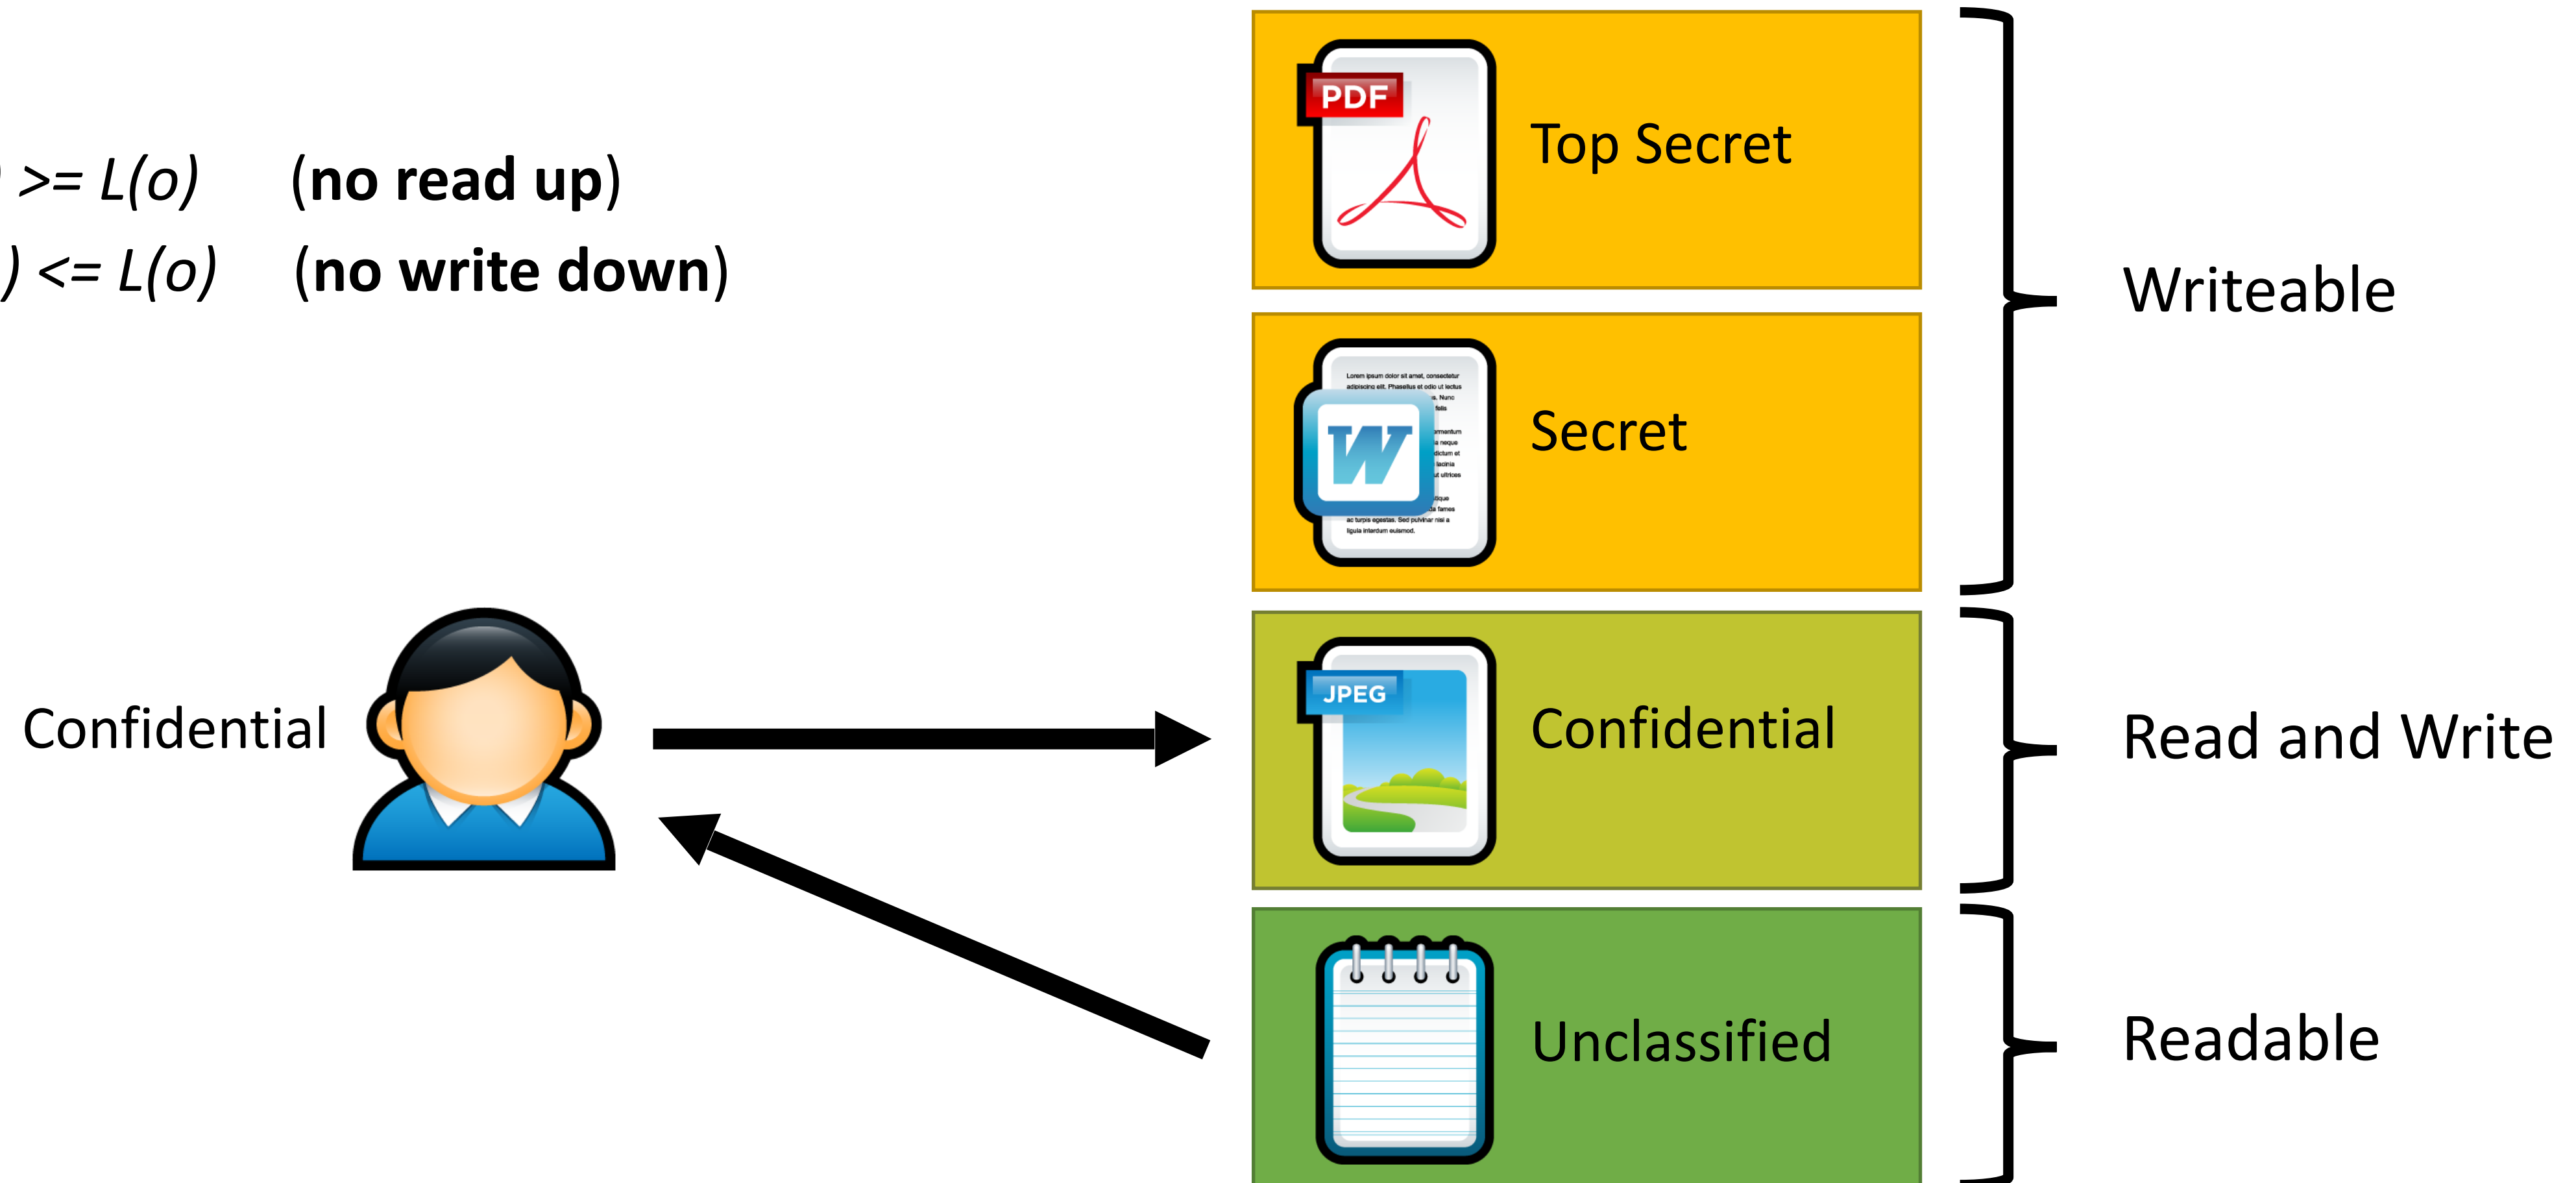

Simplified Bell-LaPadula Example

- Assume $L_m(s) = L_c(s)$ is always true
- ★-property
 - s can read o iff $L(s) \geq L(o)$ (no read up)
 - s can write o iff $L(s) \leq L(o)$ (no write down)

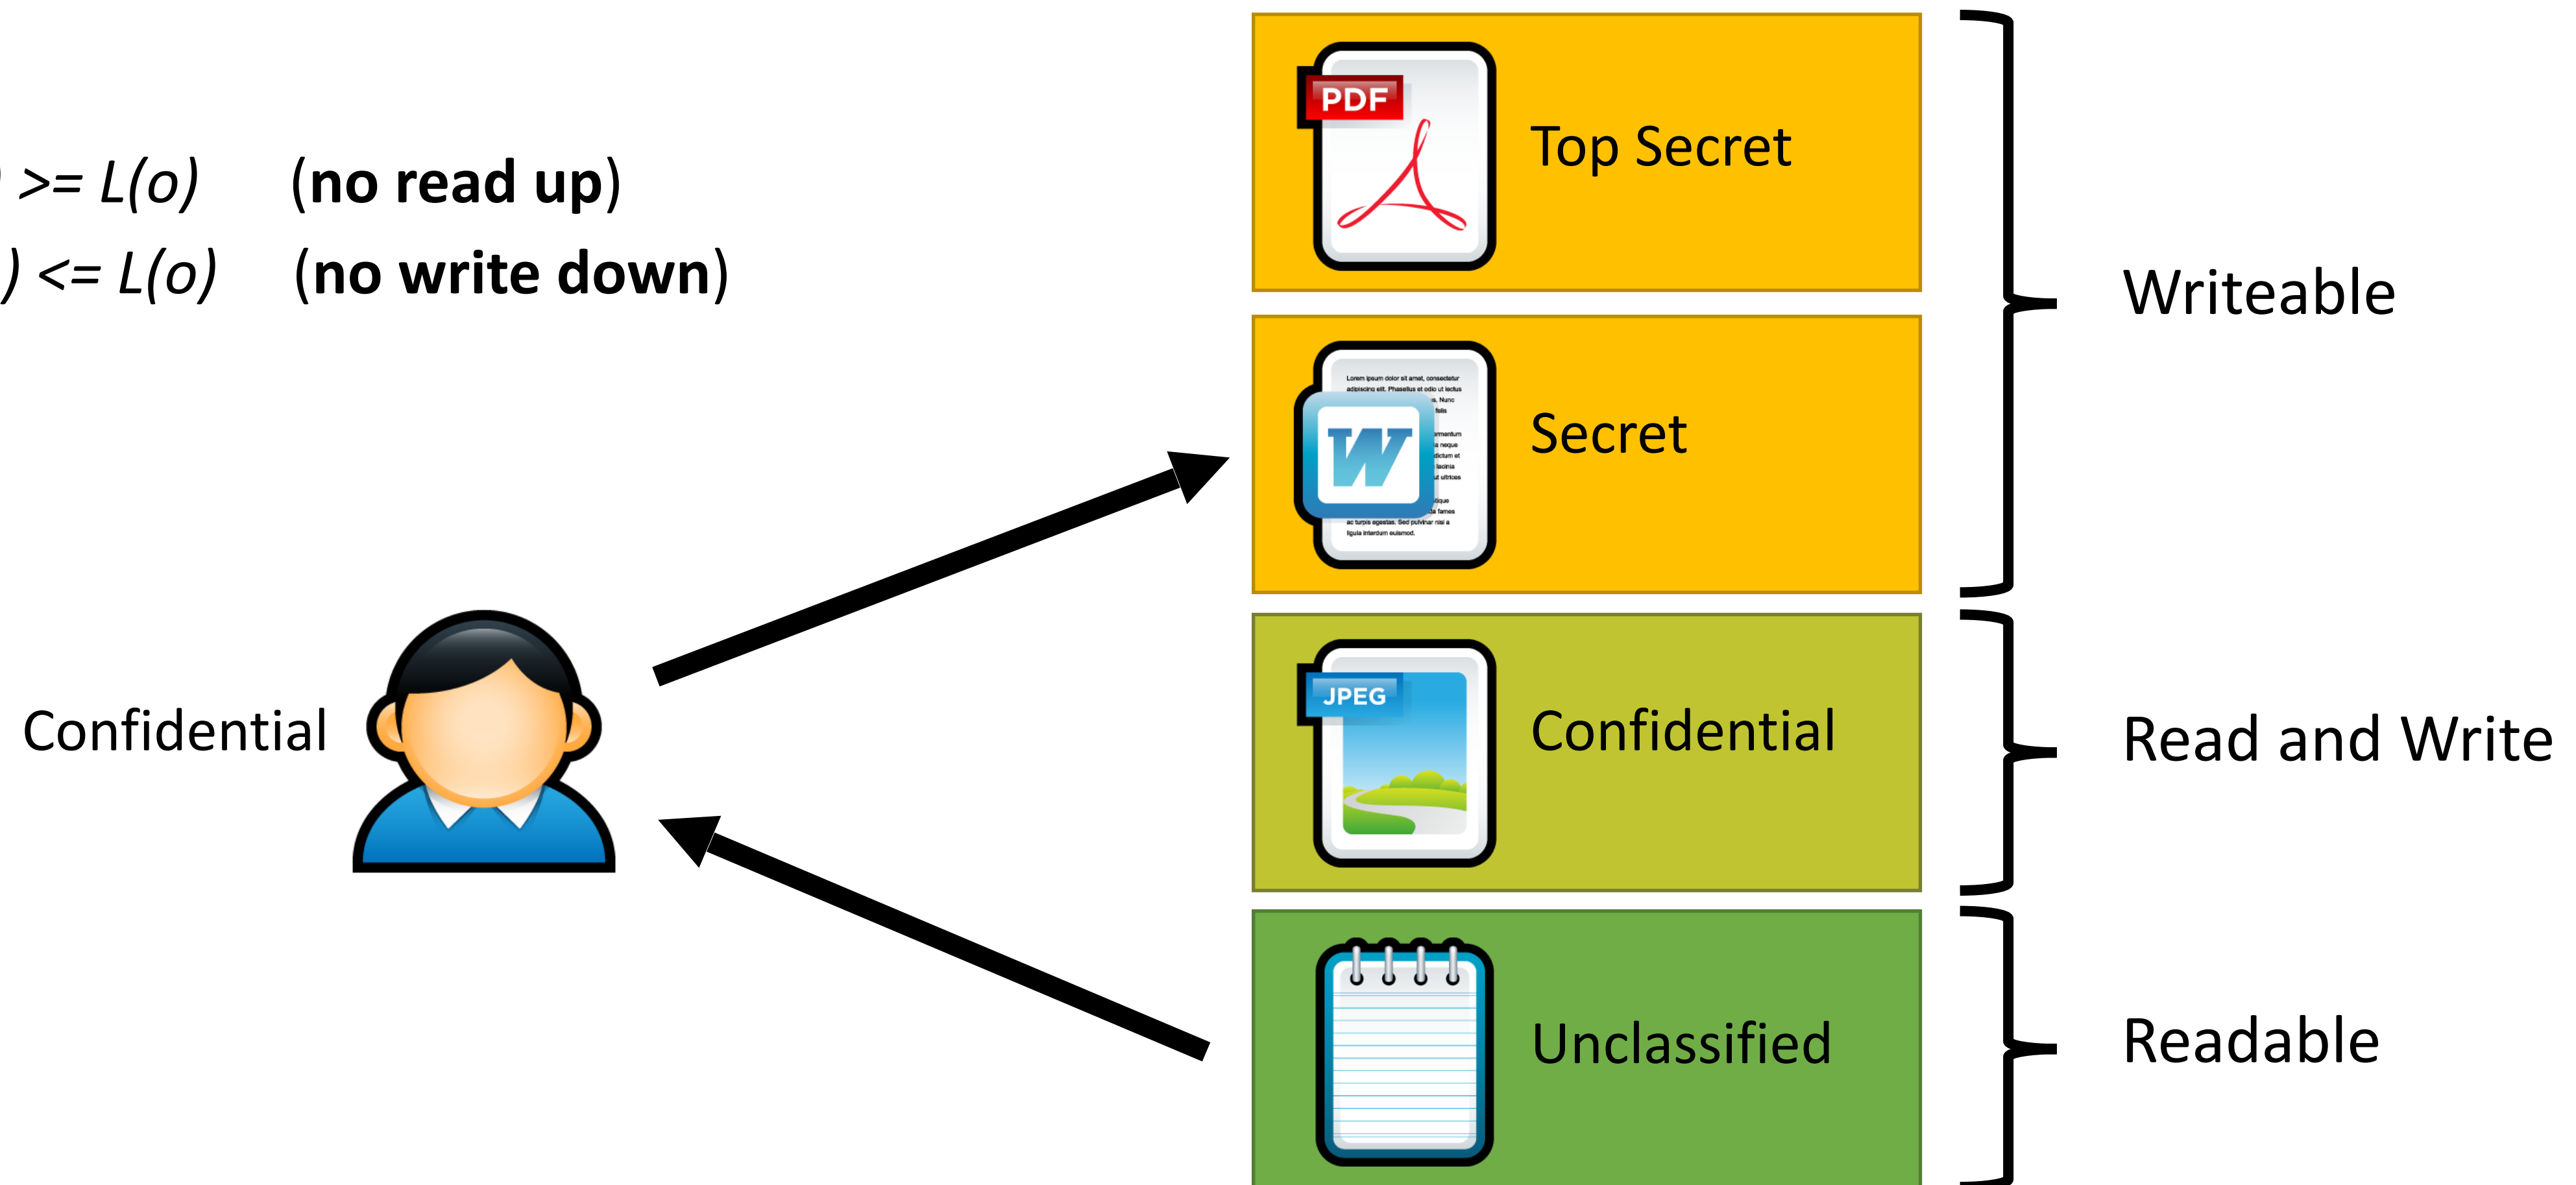

BLP Idea

A computer system is in a **state**, and undergoes state **transitions** whenever an **operation** occurs..

System is secure if all transitions satisfy 3 properties:

Simple:

Star:

Discretionary:

BLP Idea

A computer system is in a state, and undergoes state transitions whenever an operation occurs..

System is secure if all transitions satisfy 3 properties:

Simple: S can read O if S has higher clearance

Star: S can write O if S has lower clearance.

Discretionary: Every access allowed by ACL.

Users are trusted

Subjects are not trusted. (Malware)

App armor



Whenever a protected program runs regardless of UID, AppArmor controls:

- The POSIX capabilities it can have (even if it is running as root)
- The directories/files it can read/write/execute

```
/usr/sbin/ntpd {
  #include <abstractions/base>
  #include <abstractions/nameservice>

  capability ipc_lock,
  capability net_bind_service,
  capability sys_time,
  capability sys_chroot,
  capability setuid,


  /etc/ntp.conf                r,
  /etc/ntp/drift*              rwl,
  /etc/ntp/keys                r,
  /etc/ntp/step-tickers        r,
  /tmp/ntp*                    rwl,
  /usr/sbin/ntpd               rix,
  /var/log/ntp                 w,
  /var/log/ntp.log             w,
  /var/run/ntpd.pid            w,
  /var/lib/ntp/drift           rwl,
  /var/lib/ntp/drift.TEMP      rwl,
  /var/lib/ntp/var/run/ntp/ntpd.pid w,
  /var/lib/ntp/drift/ntp.drift r,
  /drift/ntp.drift.TEMP        rwl,
  /drift/ntp.drift             rwl,
}
```

Example security profile for ntpd

Apparmor



AppArmor Architecture

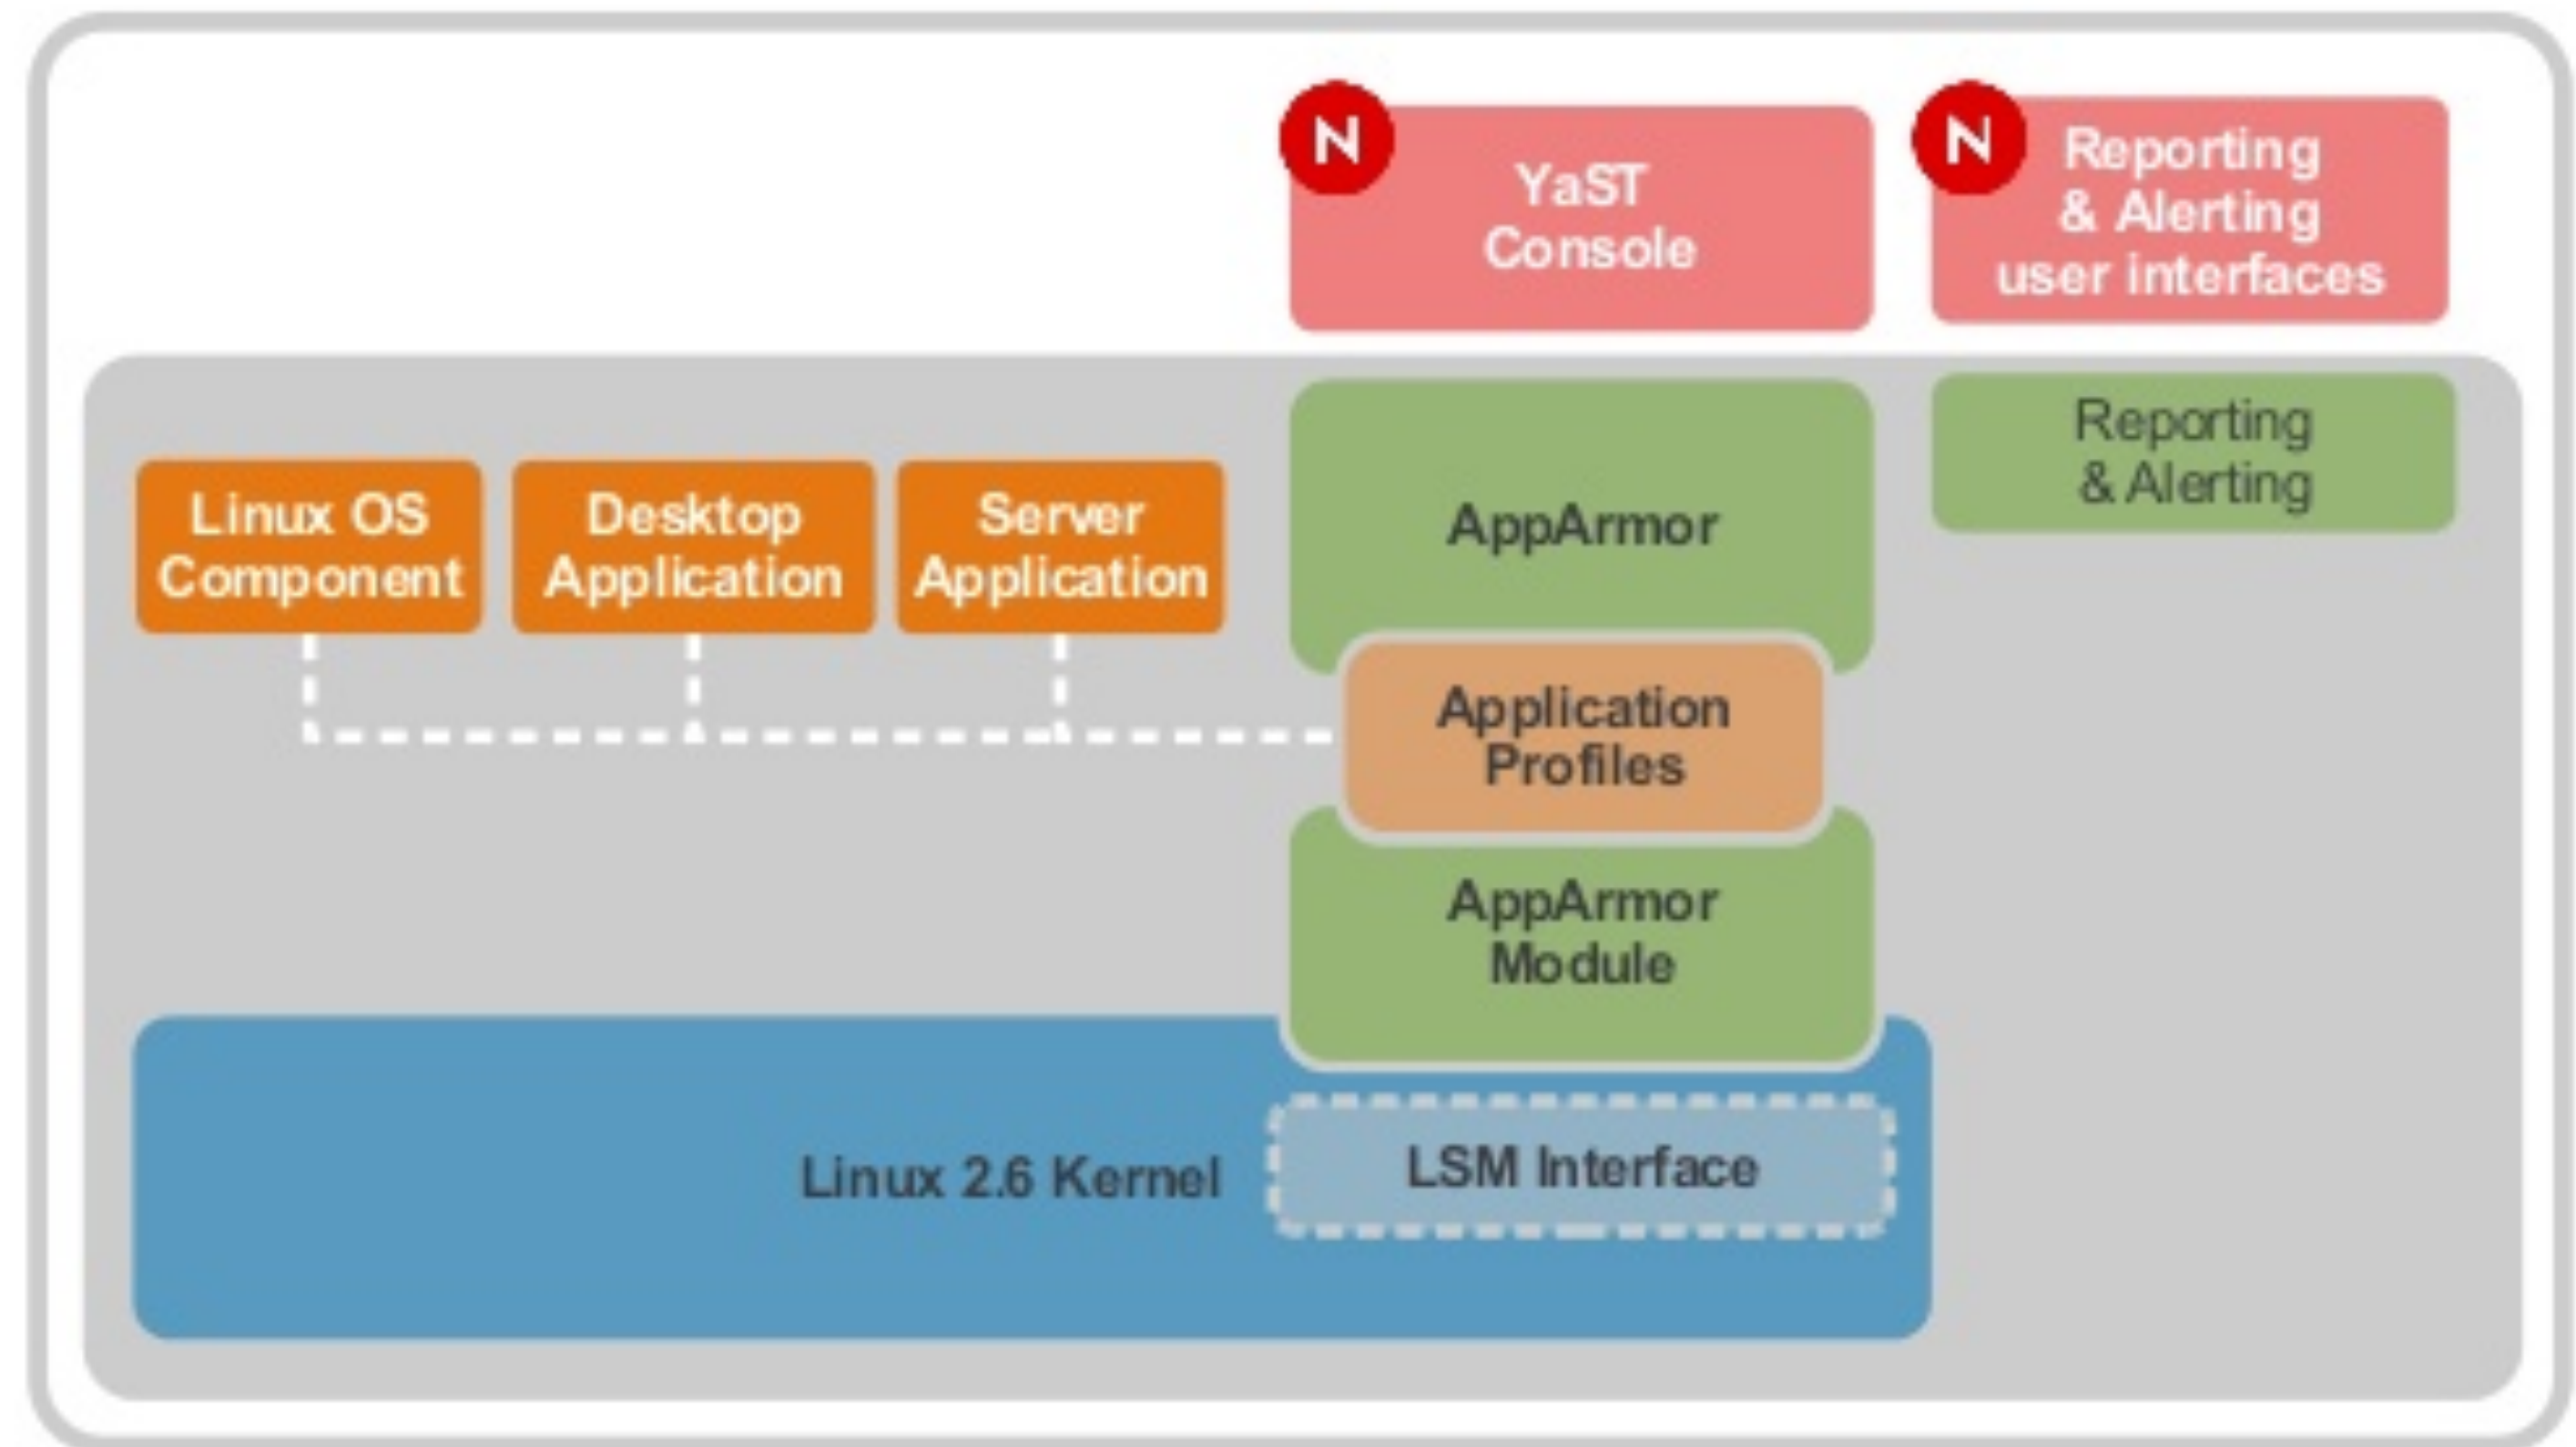

abhi@abhi-VirtualBox: ~

```
abhi@abhi-VirtualBox:~$ aa-  
aa-audit          aa-complain      aa-enabled       aa-genprof       aa-remove-unknown aa-unconfined  
aa-autodep        aa-decode        aa-enforce       aa-logprof       aa-status        aa-update-browser  
aa-cleanprof     aa-disable       aa-exec          aa-mergeprof     aa-teardown  
abhi@abhi-VirtualBox:~$ aa-
```

Apparmor

```
abhi@abhi-VirtualBox: ~
# vim:syntax=apparmor
#include <tunables/global>

/usr/sbin/tcpdump {
  #include <abstractions/base>
  #include <abstractions/nameservice>
  #include <abstractions/user-tmp>

  capability net_raw,
  capability setuid,
  capability setgid,
  capability dac_override,
  capability chown,
  network raw,
  network packet,

  # for -D
  @{PROC}/bus/usb/ r,
  @{PROC}/bus/usb/** r,

  # for finding an interface
  /dev/ r,
  @{PROC}/[0-9]*/net/dev r,
  /sys/bus/usb/devices/ r,
  /sys/class/net/ r,
  /sys/devices/**/net/** r,

  # for -j
  capability net_admin,

  # for tracing USB bus, which libpcap supports
  /dev/usbmon* r,
  /dev/bus/usb/ r,
  /dev/bus/usb/** r,

  # for init_etharray(), with -e
  /etc/ethers r,

  # for USB probing (see libpcap-1.1.x/pcap-usb-linux.c:probe_devices())
  /dev/bus/usb/**/[0-9]* w,

  # for -z
  /{usr/,}bin/gzip ixr,
  /{usr/,}bin/bzip2 ixr,

  # for -F and -w
  audit deny @{HOME}/.* mrwkl,
  audit deny @{HOME}/.*/* rw,
/etc/apparmor.d/usr.sbin.tcpdump
```

Not Enough



TopSecret.pdf

rwX User A

--- User B




NotSecret.pdf

rwX User A

rwX User B

Not Enough: Covert channels

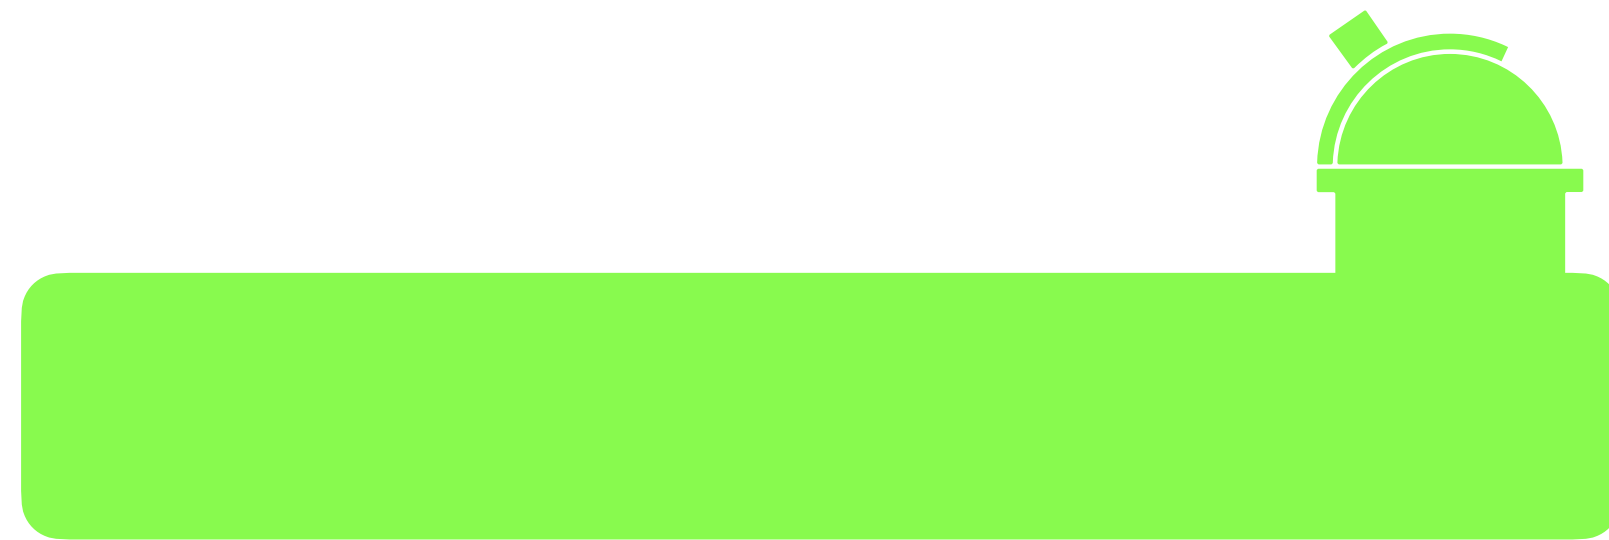


Security Lattice

Compartments:

Ordering between (Level, Compartment)

Lattice

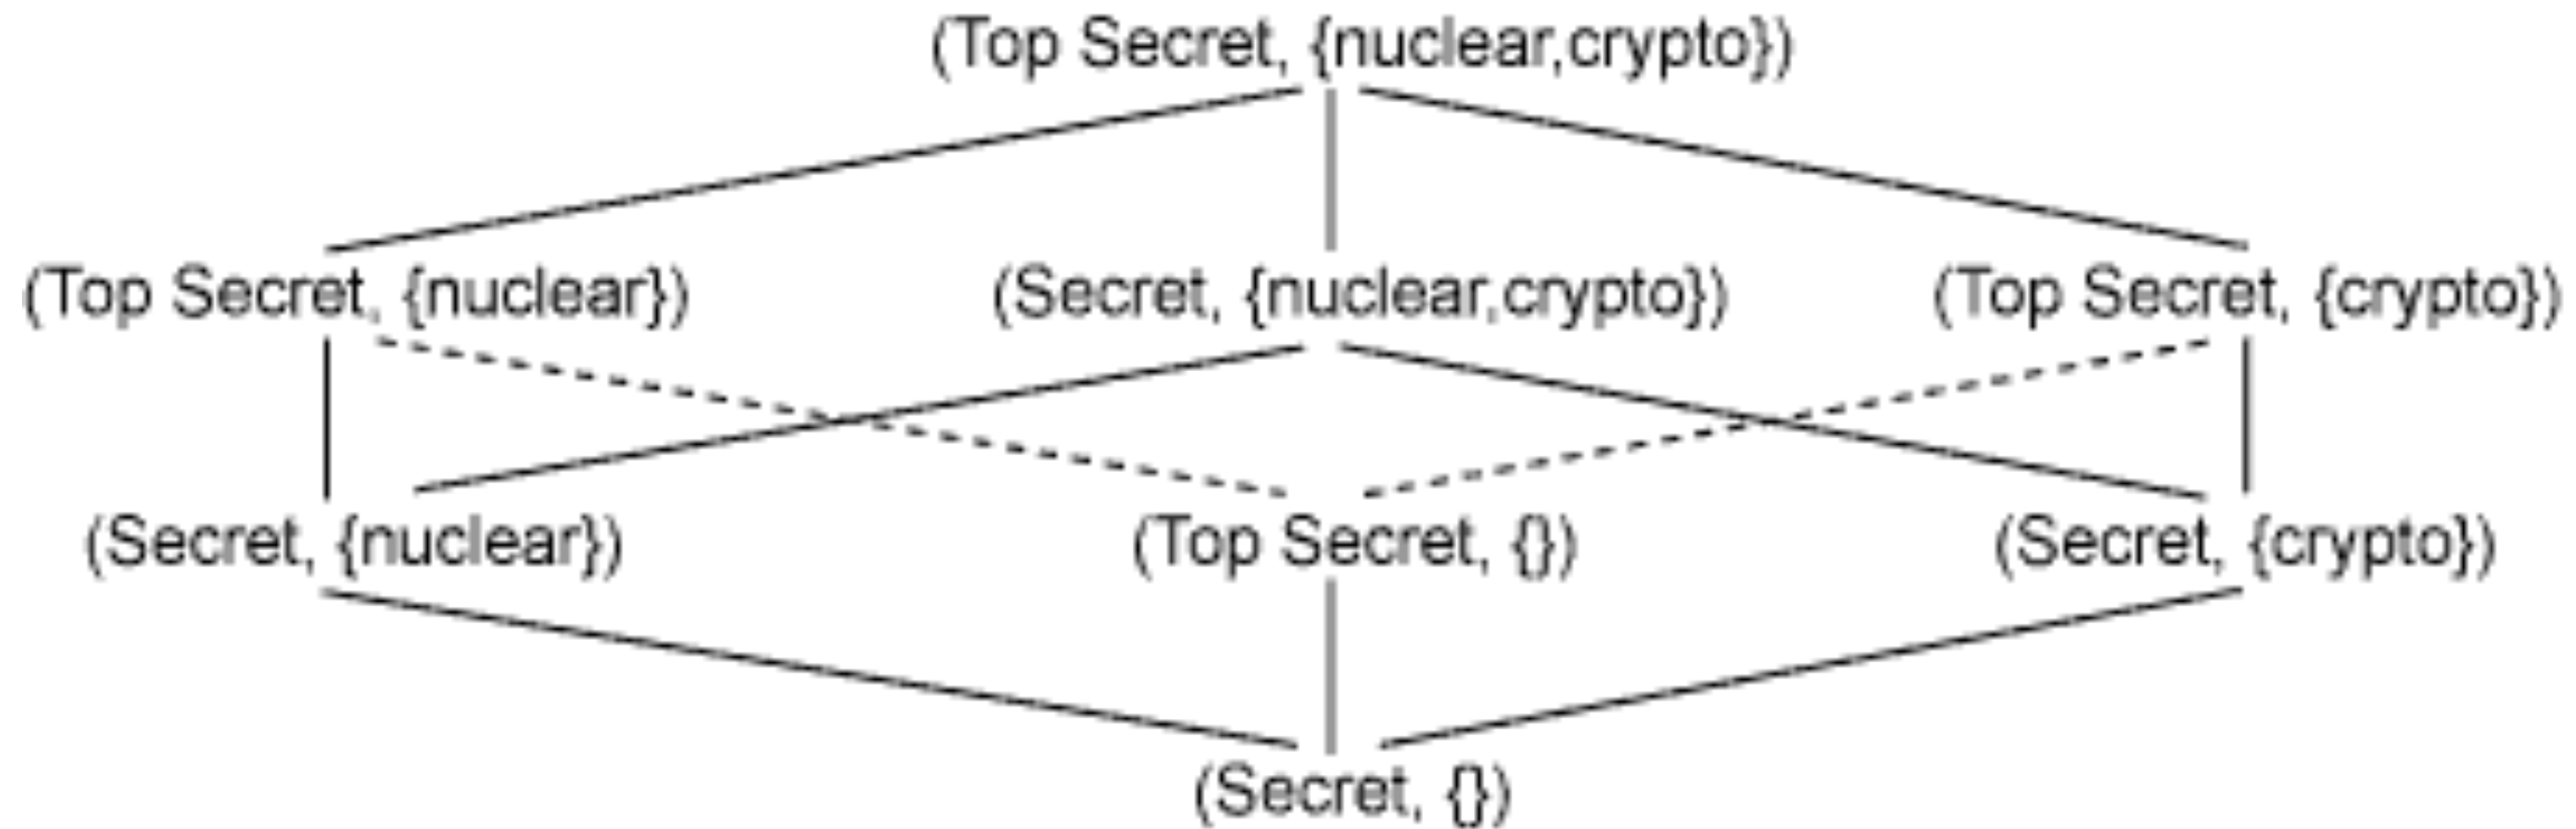


Need-to-Know policy

Integrity Protection in Practice

- Mandatory Integrity Control in Windows
 - Since Vista
 - Four integrity levels: Low, Medium, High, System
 - Each process assigned a level
 - Processes started by normal users are Medium
 - Elevated processes have High
 - Some processes intentionally run as Low
 - Internet Explorer in protected mode
 - Ring policy
 - Reading and writing do not change integrity level

Integrity Protection in Practice

- Mandatory Integrity Control in Windows
 - Since Vista
 - Four integrity levels: Low, Medium, High, System
 - Each process assigned a level
 - Processes started by normal users are Medium
 - Elevated processes have High
 - Some processes intentionally run as Low
 - Internet Explorer in protected mode
- Ring policy
 - Reading and writing do not change integrity level

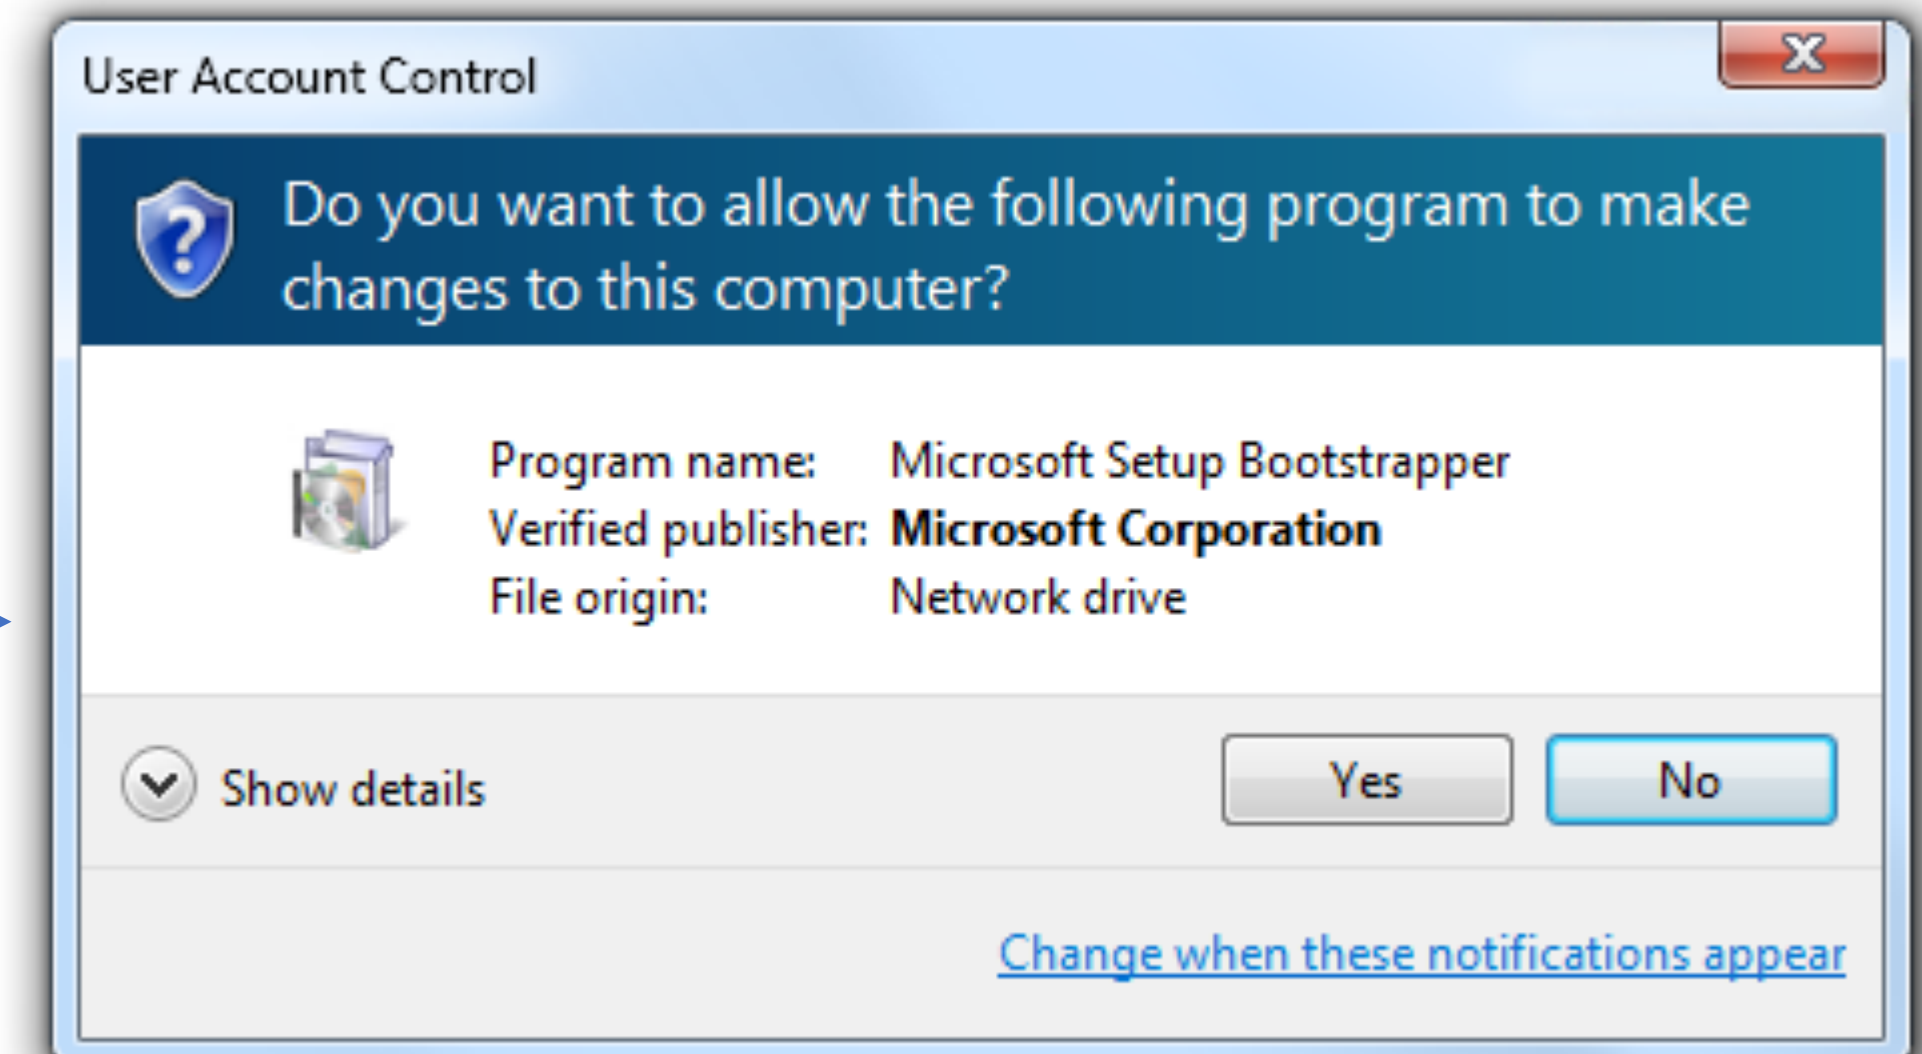

Confidentiality? What else?

Biba Integrity Policy

Biba Integrity Model

- Proposed in 1975
- Like Bell-LaPadula, security model with provable properties based on a state transition model
 - Each subject has an integrity level
 - Each object has an integrity level
 - Integrity levels are totally ordered (high \rightarrow low)
- Integrity levels in Biba are not the same as security levels in Bell-LaPadula
 - Some high integrity data does not need confidentiality
 - Examples: stock prices, official statements from the president

Possible Mandatory Policies in Biba

1. Strict integrity

- s can read o iff $i(s) \leq i(o)$
- s can write o iff $i(s) \geq i(o)$

(no read down)

(no write up)

Possible Mandatory Policies in Biba

1. Strict integrity

- s can read o iff $i(s) \leq i(o)$
- s can write o iff $i(s) \geq i(o)$

(no read down)

(no write up)

2. Subject low-water mark

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can write o iff $i(s) \geq i(o)$

(subject tainting)

(no write up)

Possible Mandatory Policies in Biba

1. Strict integrity

- s can read o iff $i(s) \leq i(o)$
- s can write o iff $i(s) \geq i(o)$

(no read down)

(no write up)

2. Subject low-water mark

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can write o iff $i(s) \geq i(o)$

(subject tainting)

(no write up)

3. Object low-water mark

- s can read o iff $i(s) \leq i(o)$
- s can always write o ; afterward $o(s) = \min(i(s), i(o))$

(no read down)

(object tainting)

Possible Mandatory Policies in Biba

1. Strict integrity

- s can read o iff $i(s) \leq i(o)$
- s can write o iff $i(s) \geq i(o)$

(no read down)

(no write up)

2. Subject low-water mark

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can write o iff $i(s) \geq i(o)$

(subject tainting)

(no write up)

3. Object low-water mark

- s can read o iff $i(s) \leq i(o)$
- s can always write o ; afterward $o(s) = \min(i(s), i(o))$

(no read down)

(object tainting)

4. Low-water mark integrity audit

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can always write o ; afterward $o(s) = \min(i(s), i(o))$

(subject tainting)

(object tainting)

Possible Mandatory Policies in Biba

1. Strict integrity

- s can read o iff $i(s) \leq i(o)$
- s can write o iff $i(s) \geq i(o)$

(no read down)

(no write up)

2. Subject low-water mark

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can write o iff $i(s) \geq i(o)$

(subject tainting)

(no write up)

3. Object low-water mark

- s can read o iff $i(s) \leq i(o)$
- s can always write o ; afterward $o(s) = \min(i(s), i(o))$

(no read down)

(object tainting)

4. Low-water mark integrity audit

- s can always read o ; afterward $i(s) = \min(i(s), i(o))$
- s can always write o ; afterward $o(s) = \min(i(s), i(o))$

(subject tainting)

(object tainting)

5. Ring

- s can read any object o
- s can write o iff $i(s) \geq i(o)$

(no write up)

Biba Strict Integrity Example

- Strict integrity

- s can read o iff $i(s) \leq i(o)$ (no read down)
- s can write o iff $i(s) \geq i(o)$ (no write up)

Medium Integrity



High Integrity



Medium Integrity



Low Integrity




Unverified

Biba Strict Integrity Example

- Strict integrity

- s can read o iff $i(s) \leq i(o)$ (no read down)
- s can write o iff $i(s) \geq i(o)$ (no write up)


Medium Integrity

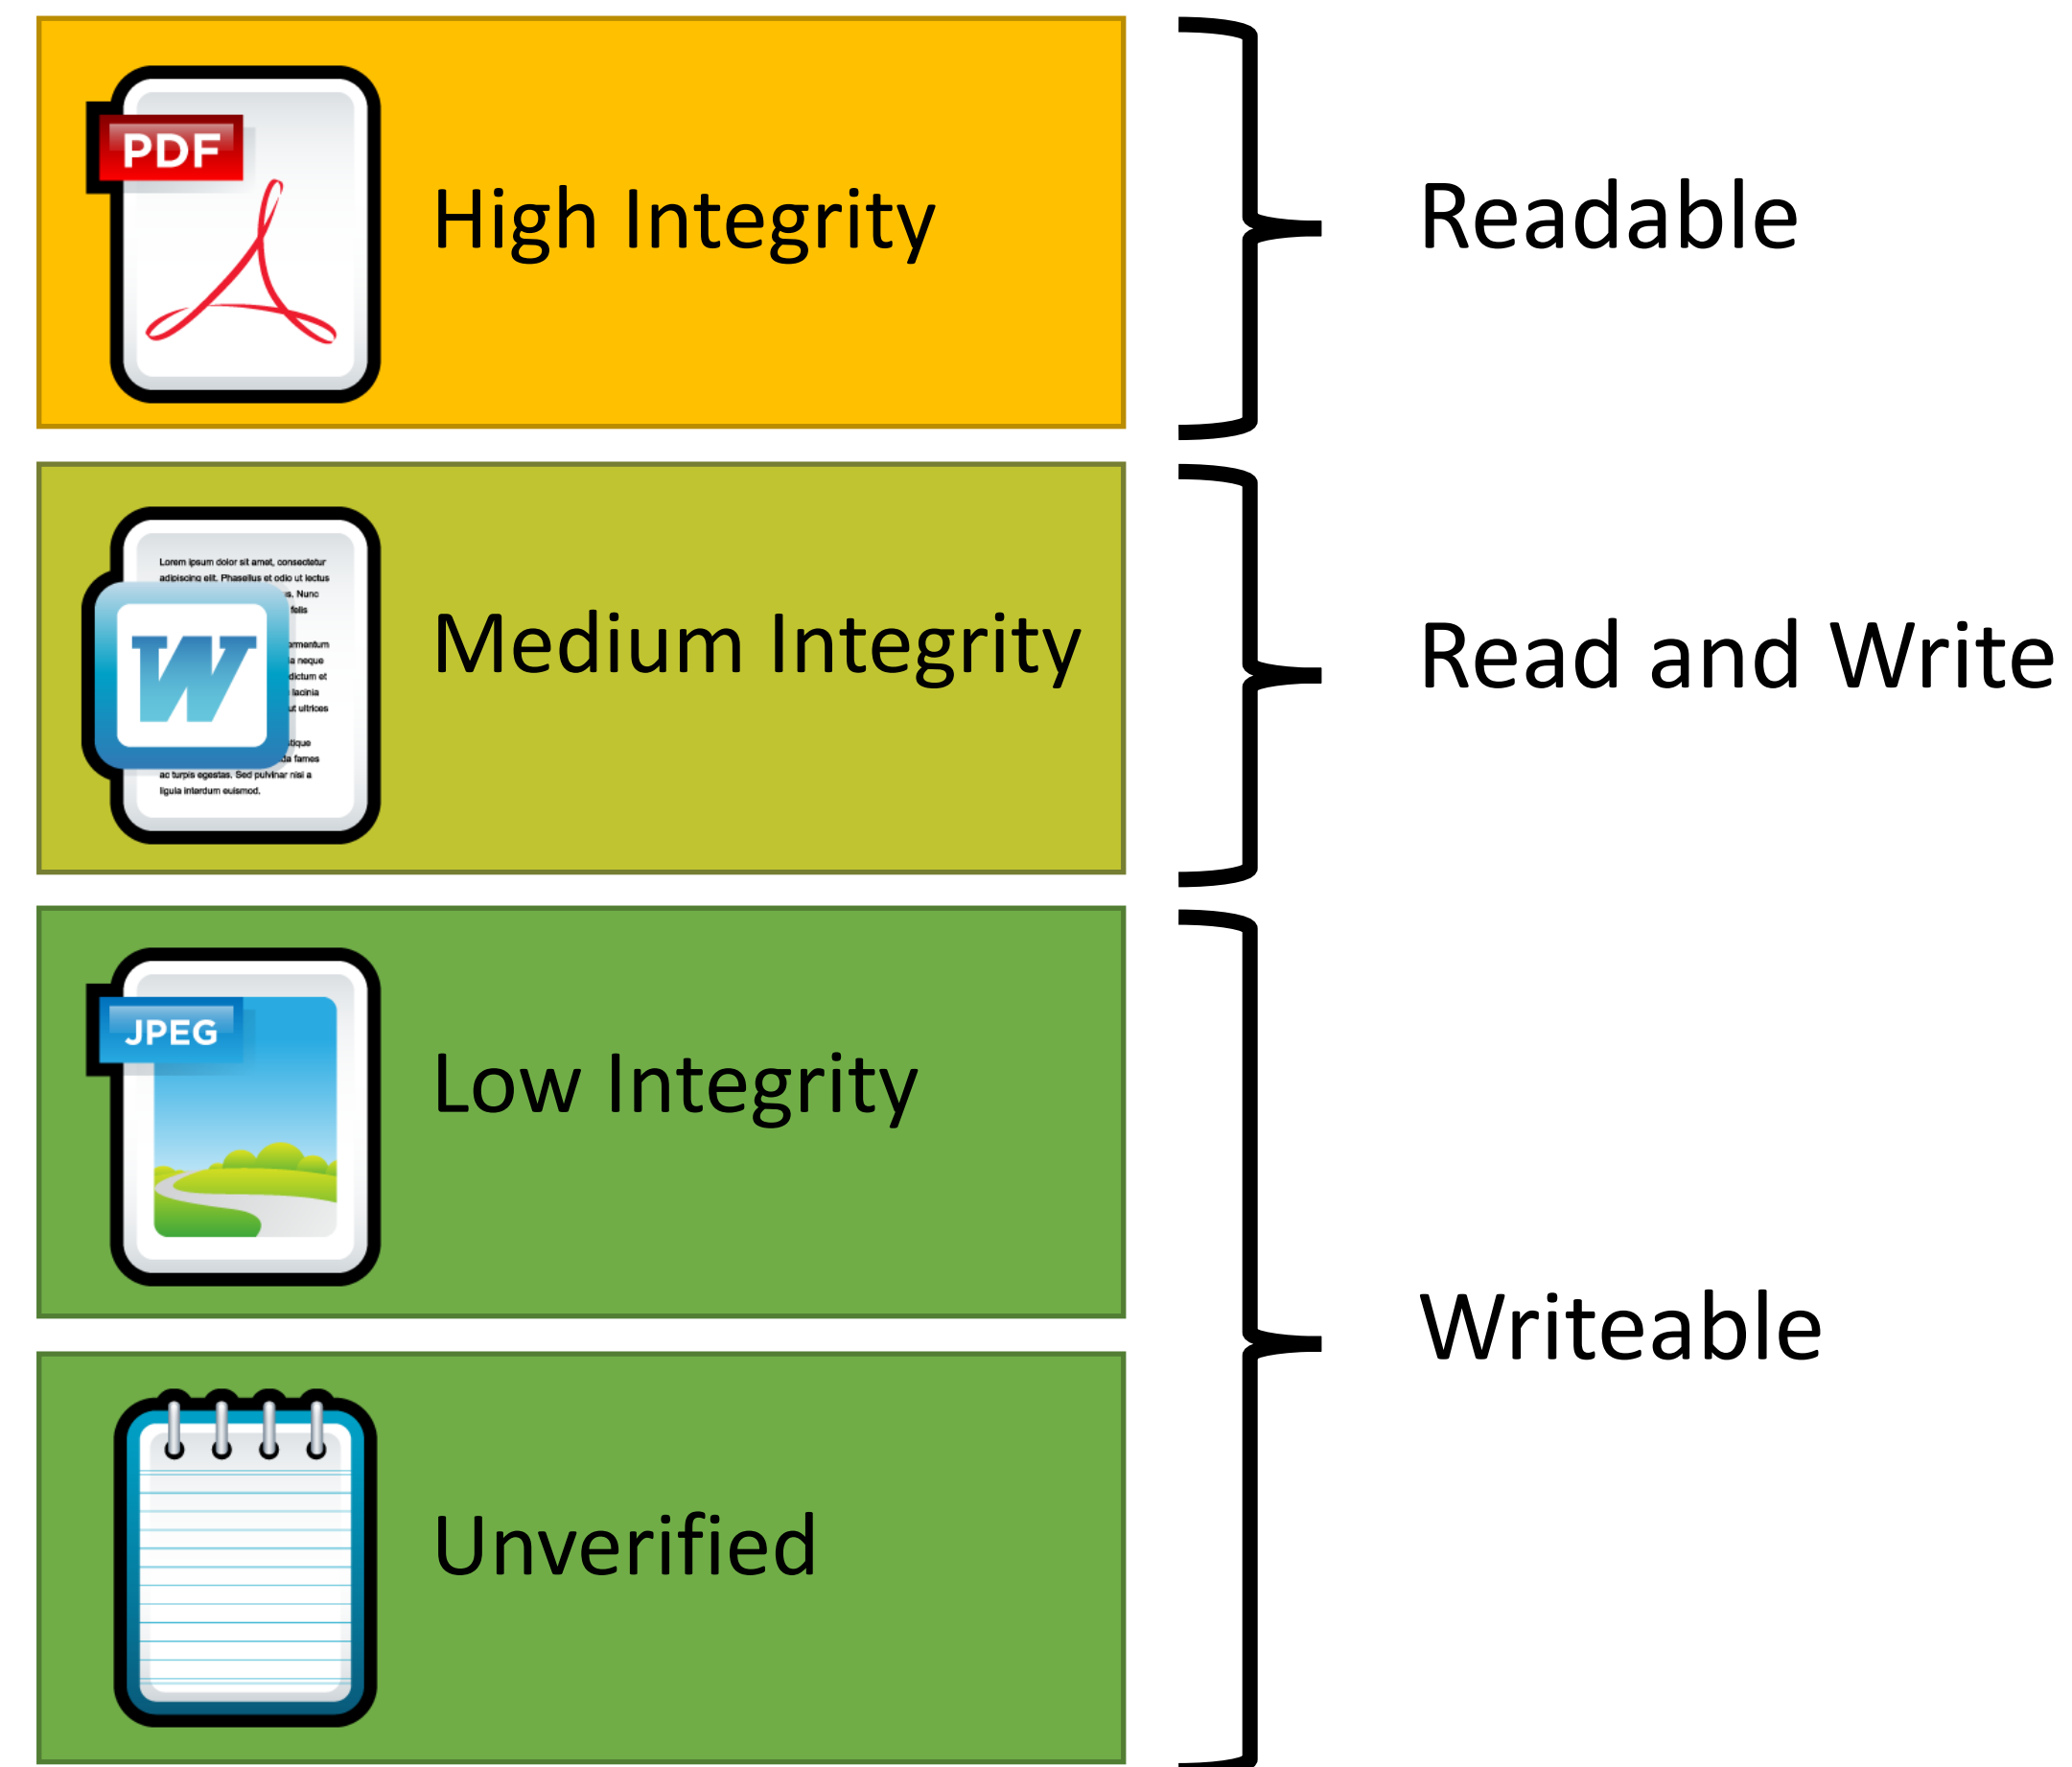

Biba Strict Integrity Example

- Strict integrity

- s can read o iff $i(s) \leq i(o)$ (no read down)
- s can write o iff $i(s) \geq i(o)$ (no write up)

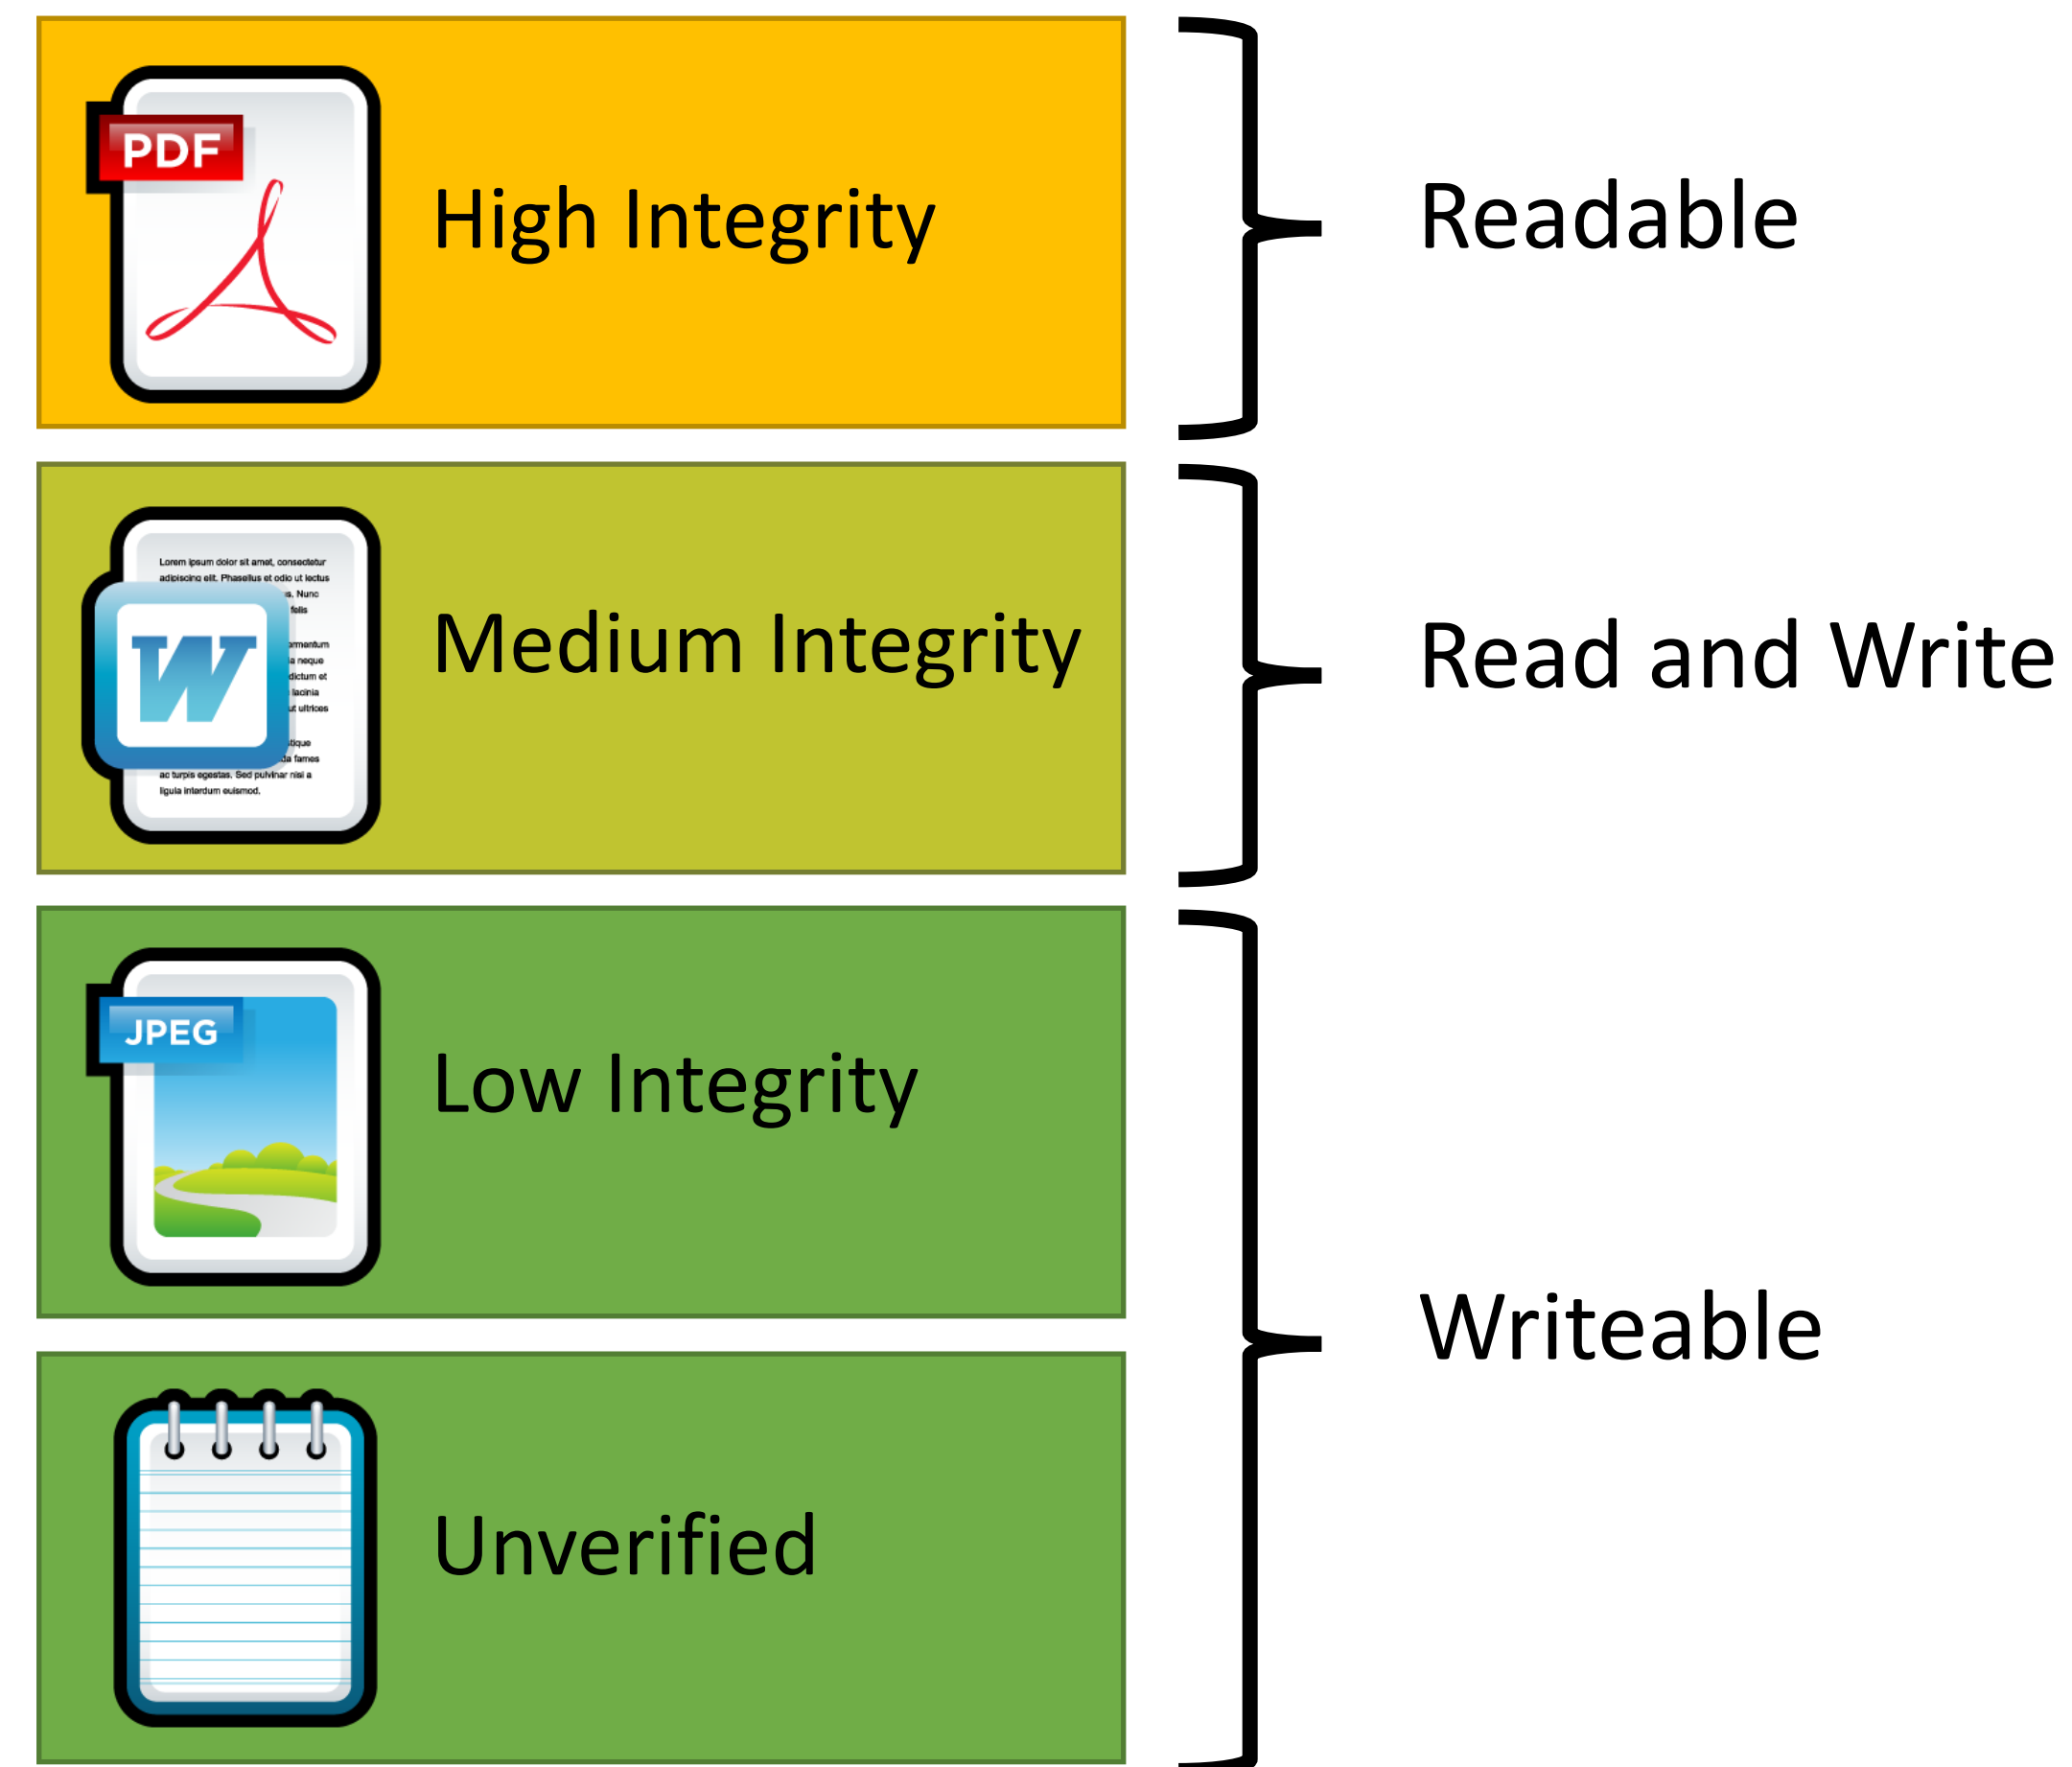


Biba Strict Integrity Example

- Strict integrity

- s can read o iff $i(s) \leq i(o)$ (no read down)
- s can write o iff $i(s) \geq i(o)$ (no write up)

Medium Integrity

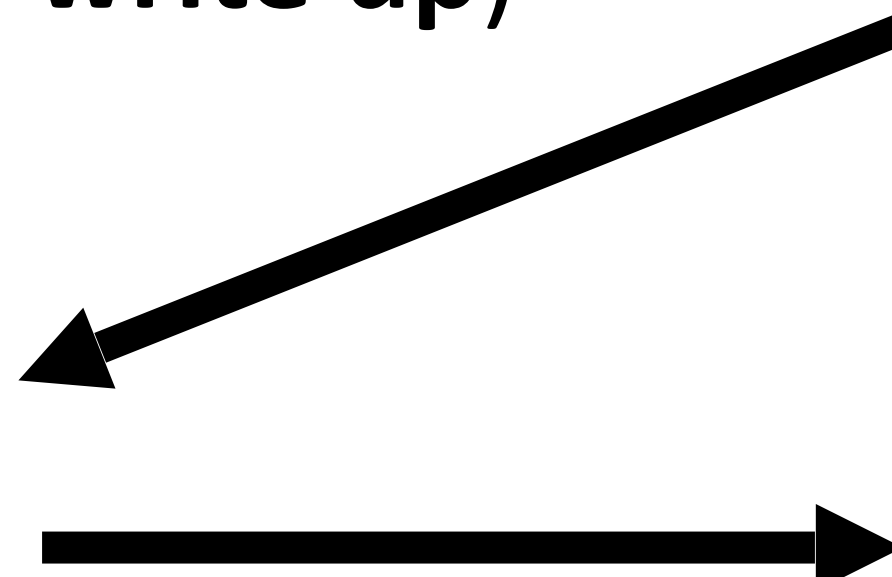

PDF High Integrity

A yellow rectangular box containing a white document icon with a red 'PDF' label and a red Adobe logo.

Medium Integrity

A green rectangular box containing a white document icon with a blue 'W' logo and placeholder text.

JPEG Low Integrity

A green rectangular box containing a white document icon with a blue 'JPEG' label and a landscape image.

Unverified

A green rectangular box containing a white document icon with a blue spiral binding.

Readable

Read and Write



Writeable

Biba Strict Integrity Example

- Strict integrity

- s can read o iff $i(s) \leq i(o)$ (no read down)
- s can write o iff $i(s) \geq i(o)$ (no write up)

Medium Integrity

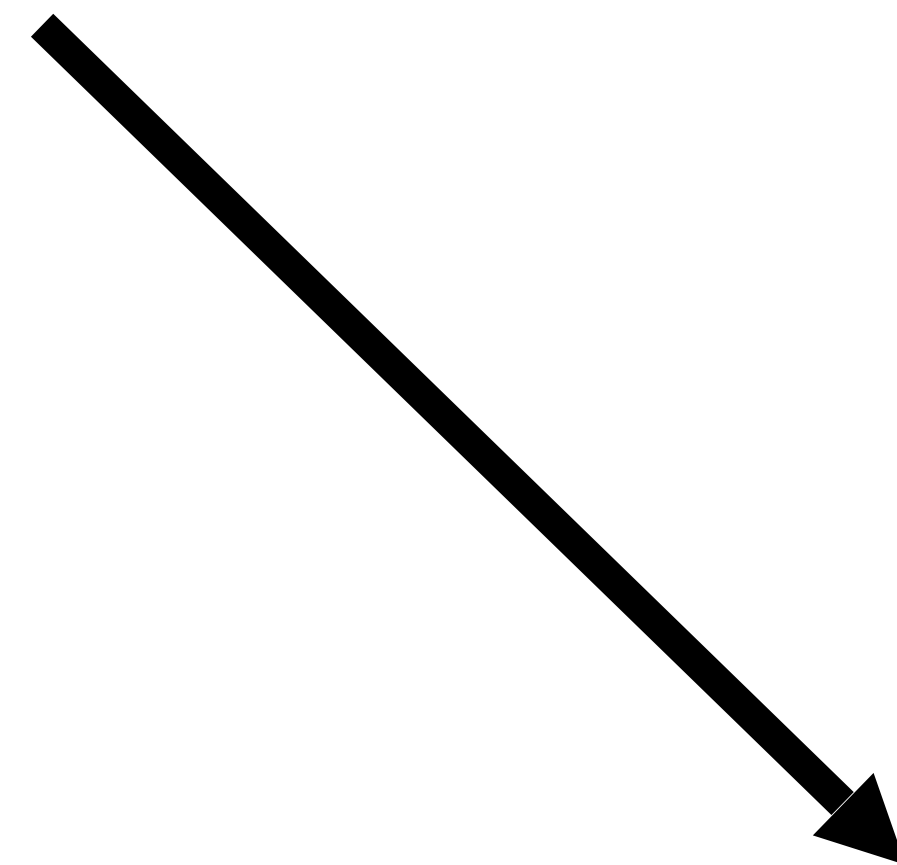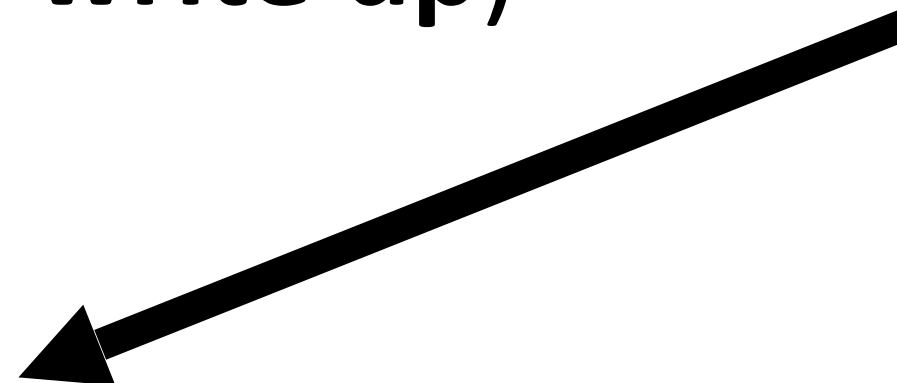

PDF High Integrity

A yellow rectangular box containing a white document icon with a red 'PDF' label and a red signature line.




Medium Integrity

A green rectangular box containing a white document icon with a blue 'W' and placeholder text.

JPEG Low Integrity

A green rectangular box containing a white document icon with a blue 'JPEG' label and a landscape image.

Unverified

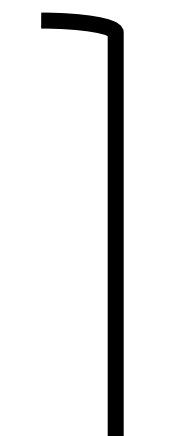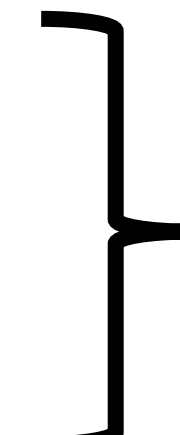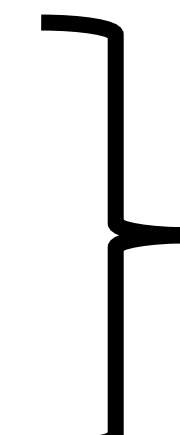A green rectangular box containing a white document icon with a blue spiral binding.

Readable

Read and Write

Writeable

Practical Example of Biba Integrity

- Military chain of command
 - Generals may issue orders to majors and privates
 - Majors may issue orders to privates, but not generals
 - Privates may only take orders



Comparison

BPL

- Offers confidentiality
- “Read down, write up”
- Focuses on controlling reads
- Theoretically, no requirement that subjects be trusted
 - Even malicious programs can't leak secrets they don't know

Biba

Comparison

BPL

- Offers confidentiality
- “Read down, write up”
- Focuses on controlling reads
- Theoretically, no requirement that subjects be trusted
 - Even malicious programs can't leak secrets they don't know

Biba

- Offers integrity

Comparison

BPL

- Offers confidentiality
- “Read down, write up”
- Focuses on controlling reads
- Theoretically, no requirement that subjects be trusted
 - Even malicious programs can’t leak secrets they don’t know

Biba

- Offers integrity
- “Read up, write down”

Comparison

BPL

- Offers confidentiality
- “Read down, write up”
- Focuses on controlling reads
- Theoretically, no requirement that subjects be trusted
 - Even malicious programs can't leak secrets they don't know

Biba

- Offers integrity
- “Read up, write down”
- Focuses on controlling writes

Comparison

BPL

- Offers confidentiality
- “Read down, write up”
- Focuses on controlling reads
- Theoretically, no requirement that subjects be trusted
 - Even malicious programs can’t leak secrets they don’t know

Biba

- Offers integrity
- “Read up, write down”
- Focuses on controlling writes
- Subjects must be trusted
 - A malicious program can write bad information

Covert and Side Channels

Caveats of Bell-LaPadula

Caveats of Bell-LaPadula

- ★-property prevents **overt** leakage of information
 - Does not address **covert channels**

Caveats of Bell-LaPadula

- ★-property prevents **overt** leakage of information
 - Does not address **covert channels**
- What does this mean?

Covert Channels

- Access control is defined over “legitimate” channels
 - Read/write an object
 - Send/receive a packet from the network
 - Read/write shared memory
- However, isolation in real systems is imperfect
 - Actions have observable side-effects



Covert Channels

- Access control is defined over “legitimate” channels
 - Read/write an object
 - Send/receive a packet from the network
 - Read/write shared memory
- However, isolation in real systems is imperfect
 - Actions have observable side-effects
- External observations can create **covert channels**
 - Communication via unintentional channels
 - Examples:
 - Existence of file(s) or locks on file(s)
 - Measure the timing of events
 - CPU cache (e.g. Meltdown and Spectre)



Simple Example

Bell-LaPadula MAC

Top Secret

Secret

Confidential



russia_intel.docx

Unclassified

Writeable


Read and Write

Unclassified



Simple Example

Bell-LaPadula MAC

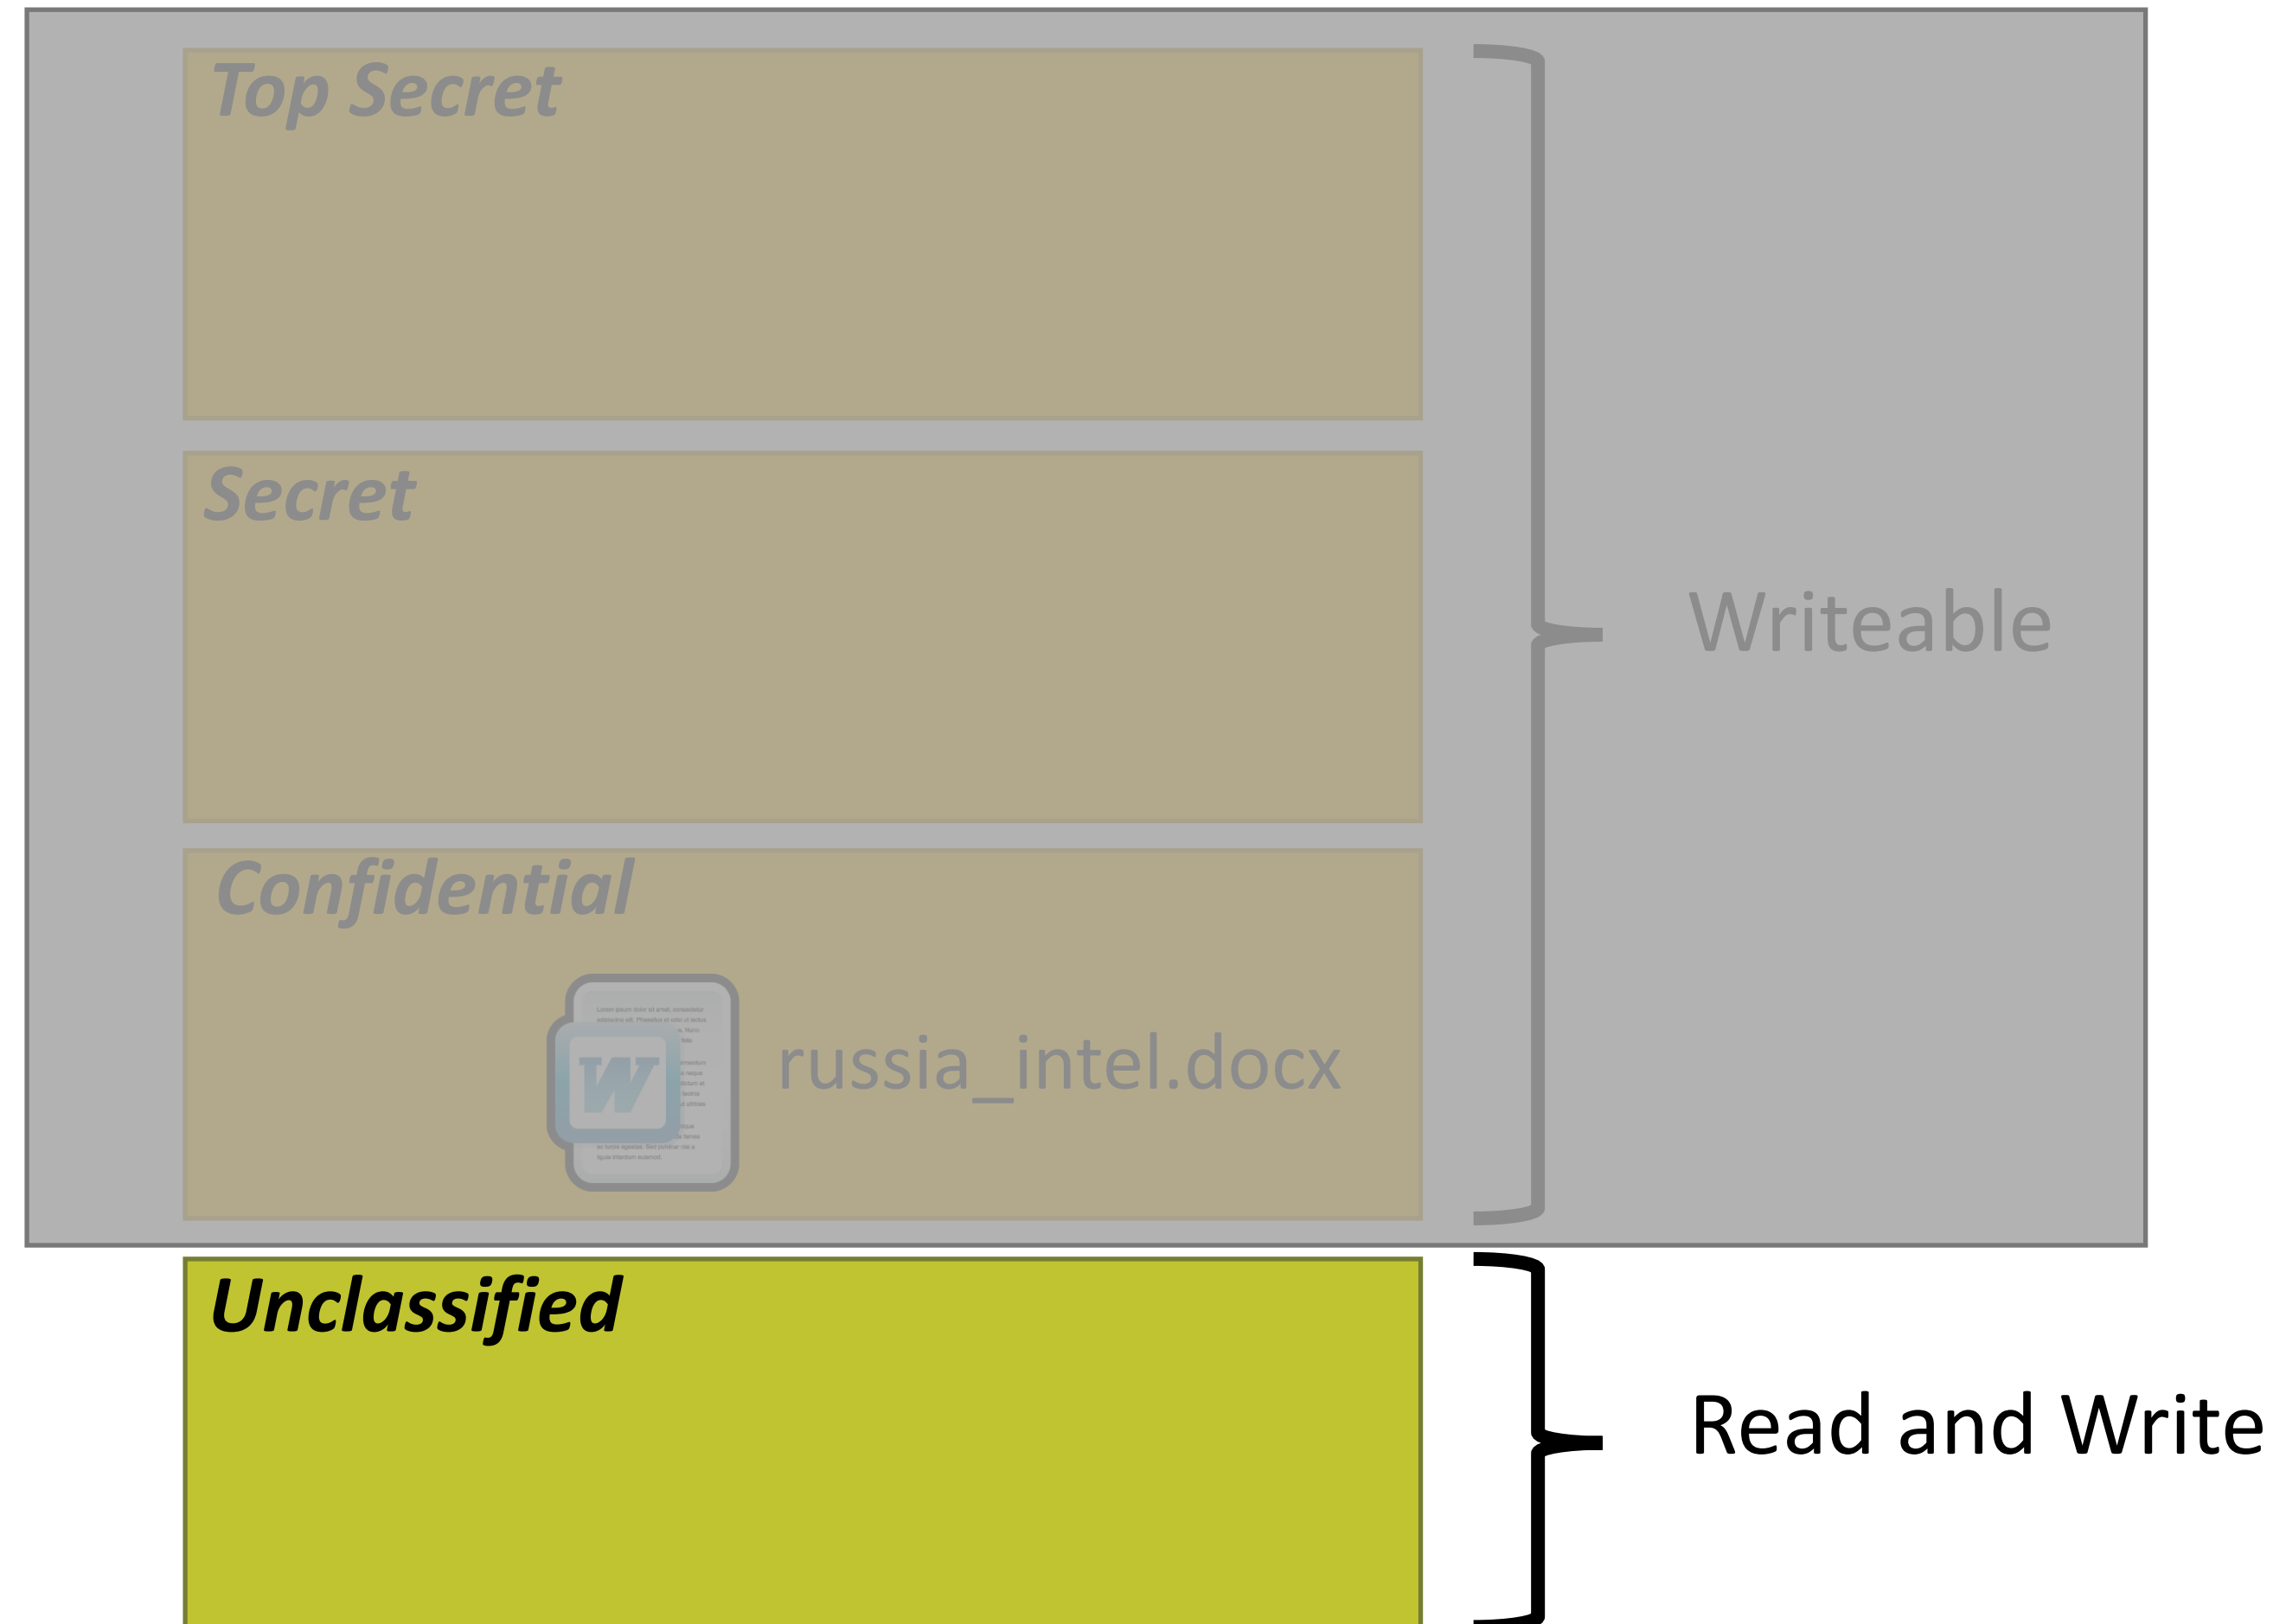


Unclassified




Simple Example

Bell-LaPadula MAC

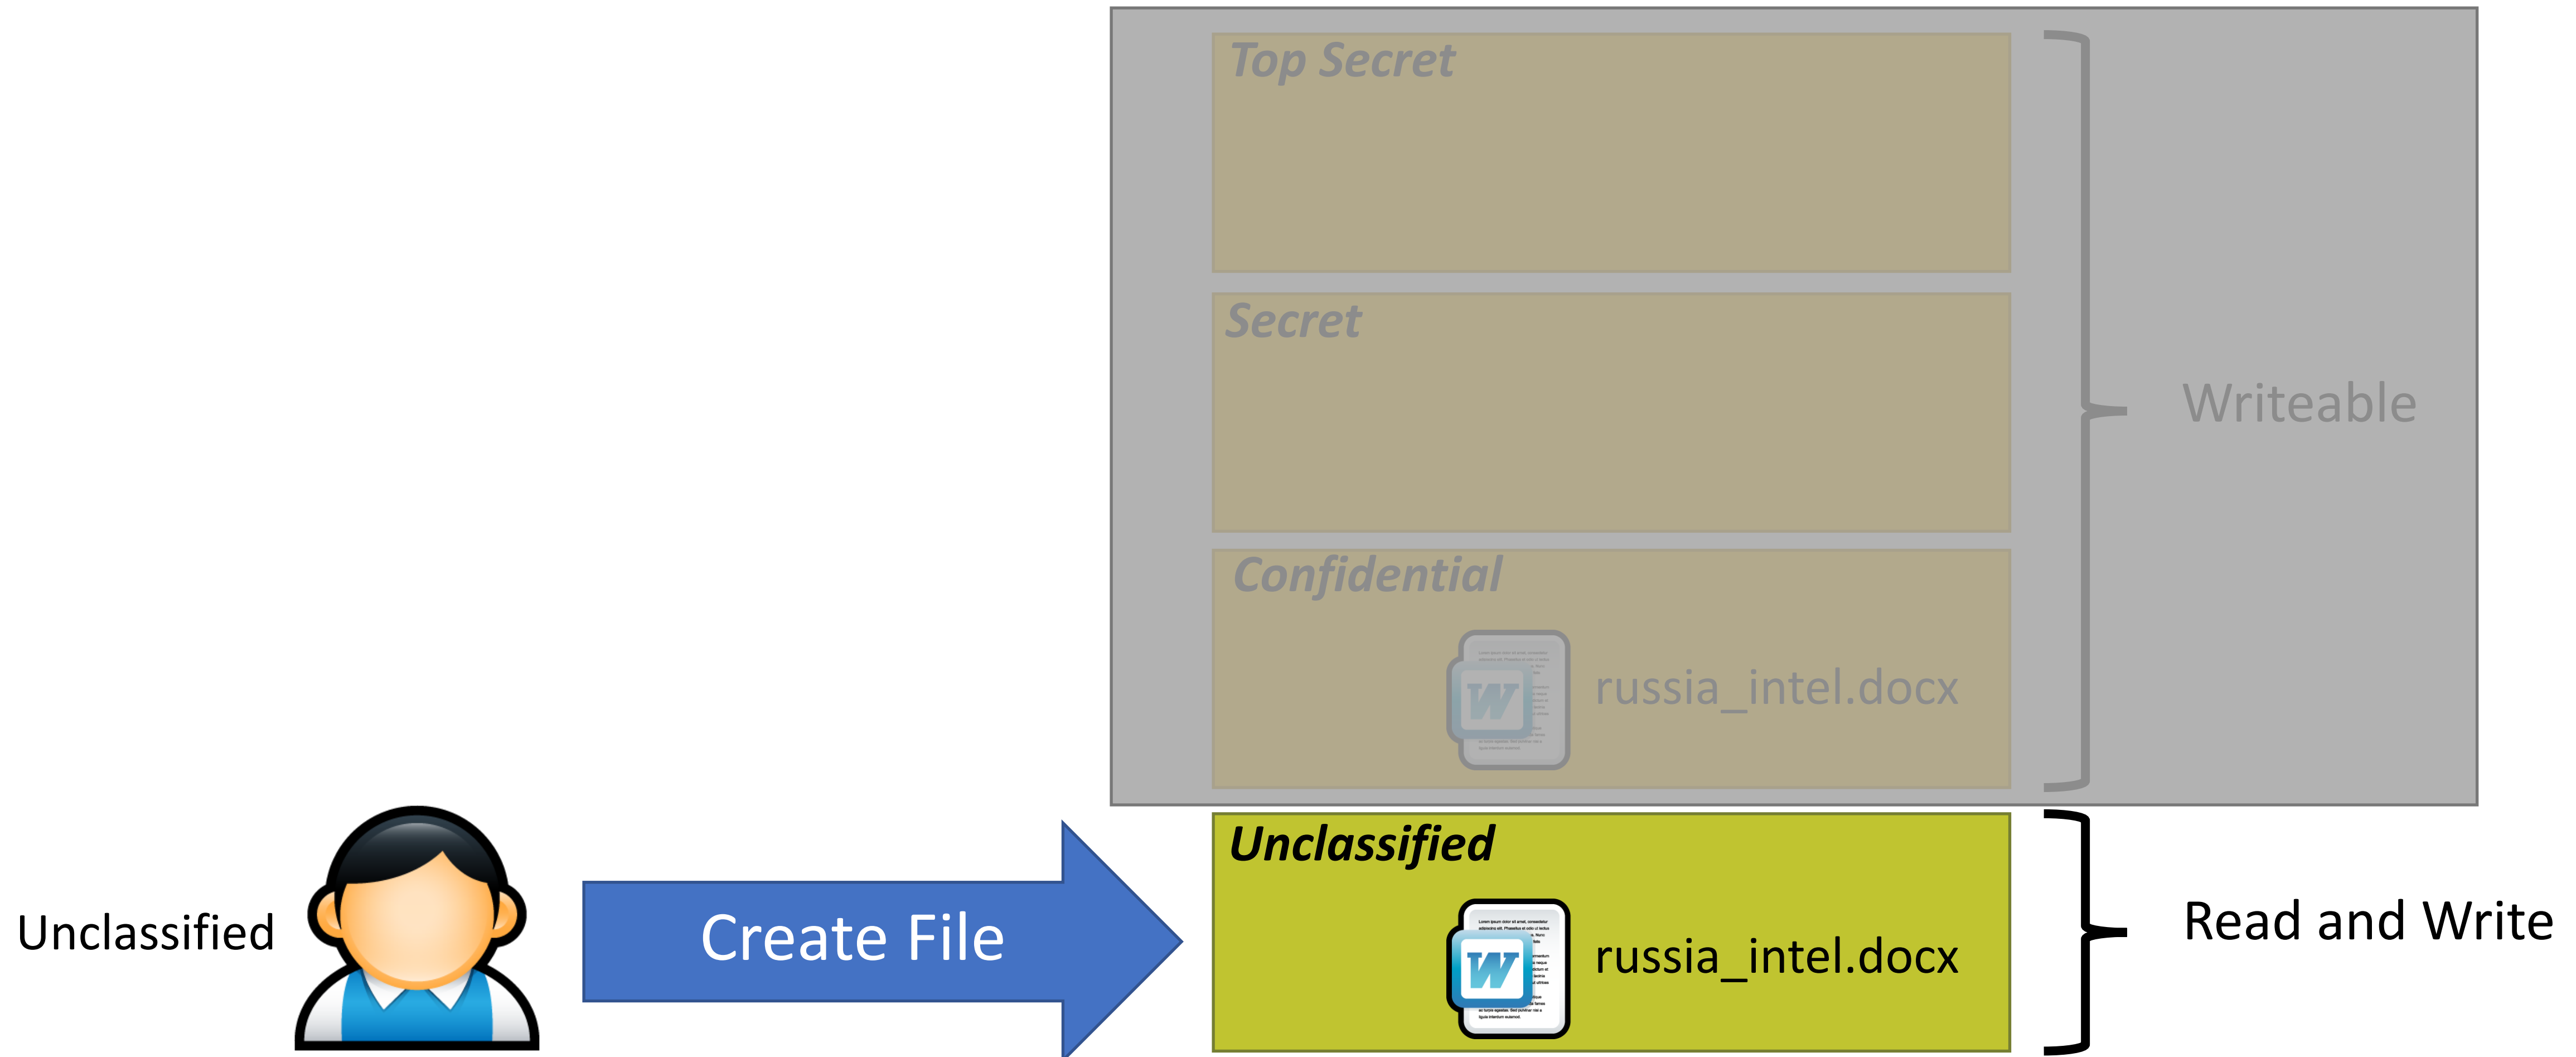

Simple Example

Bell-LaPadula MAC

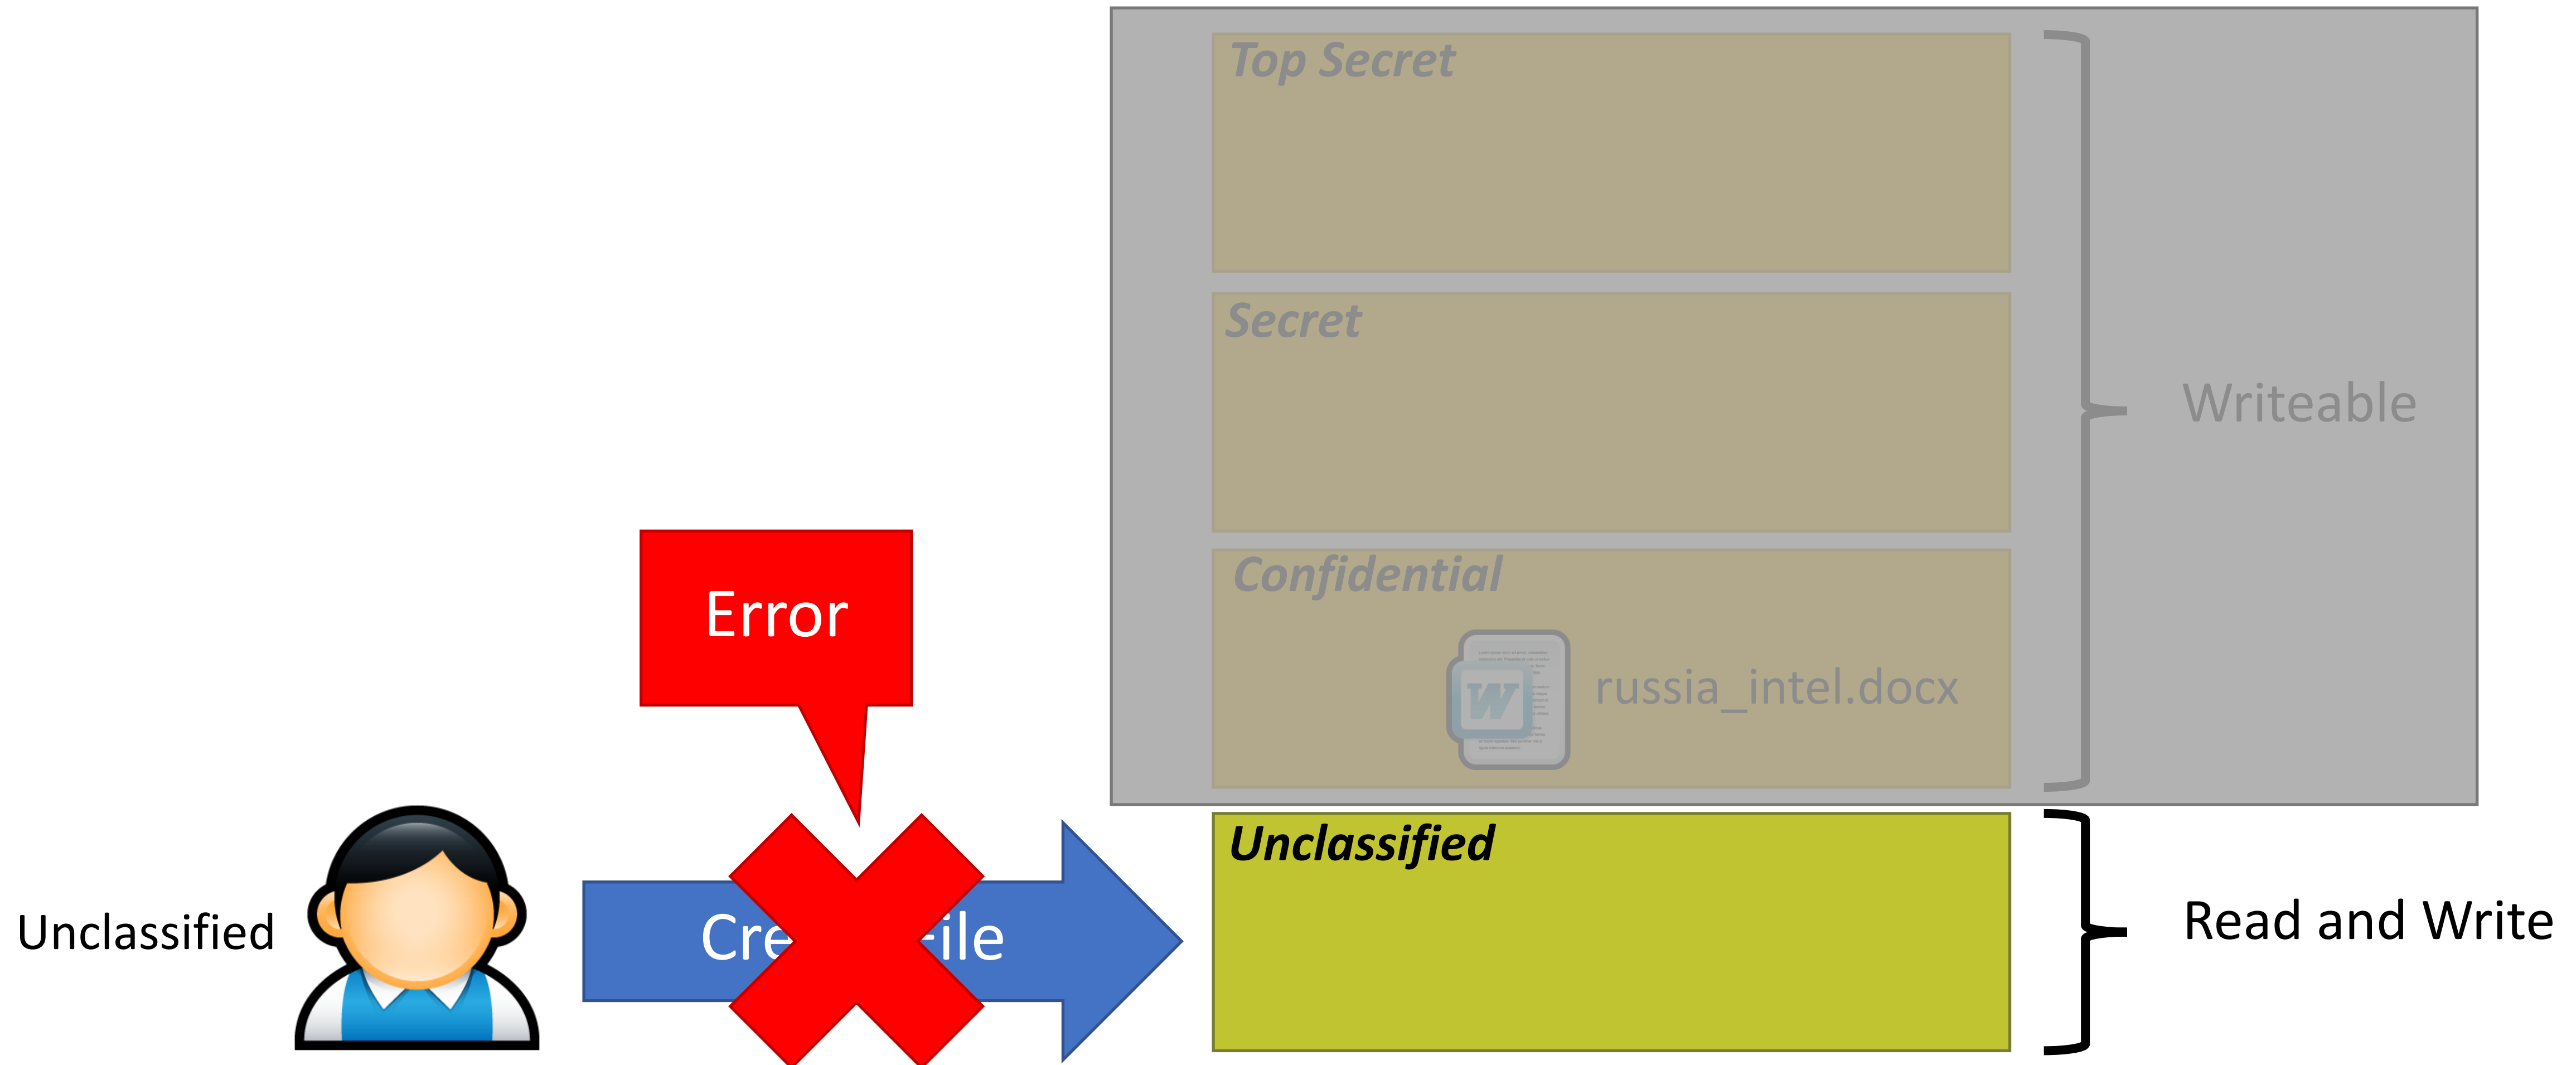

Simple Example

Hmm, a classified file named `russia_intel.docx` must already exist...


Unclassified



Create file

Error

Bell-LaPadula MAC

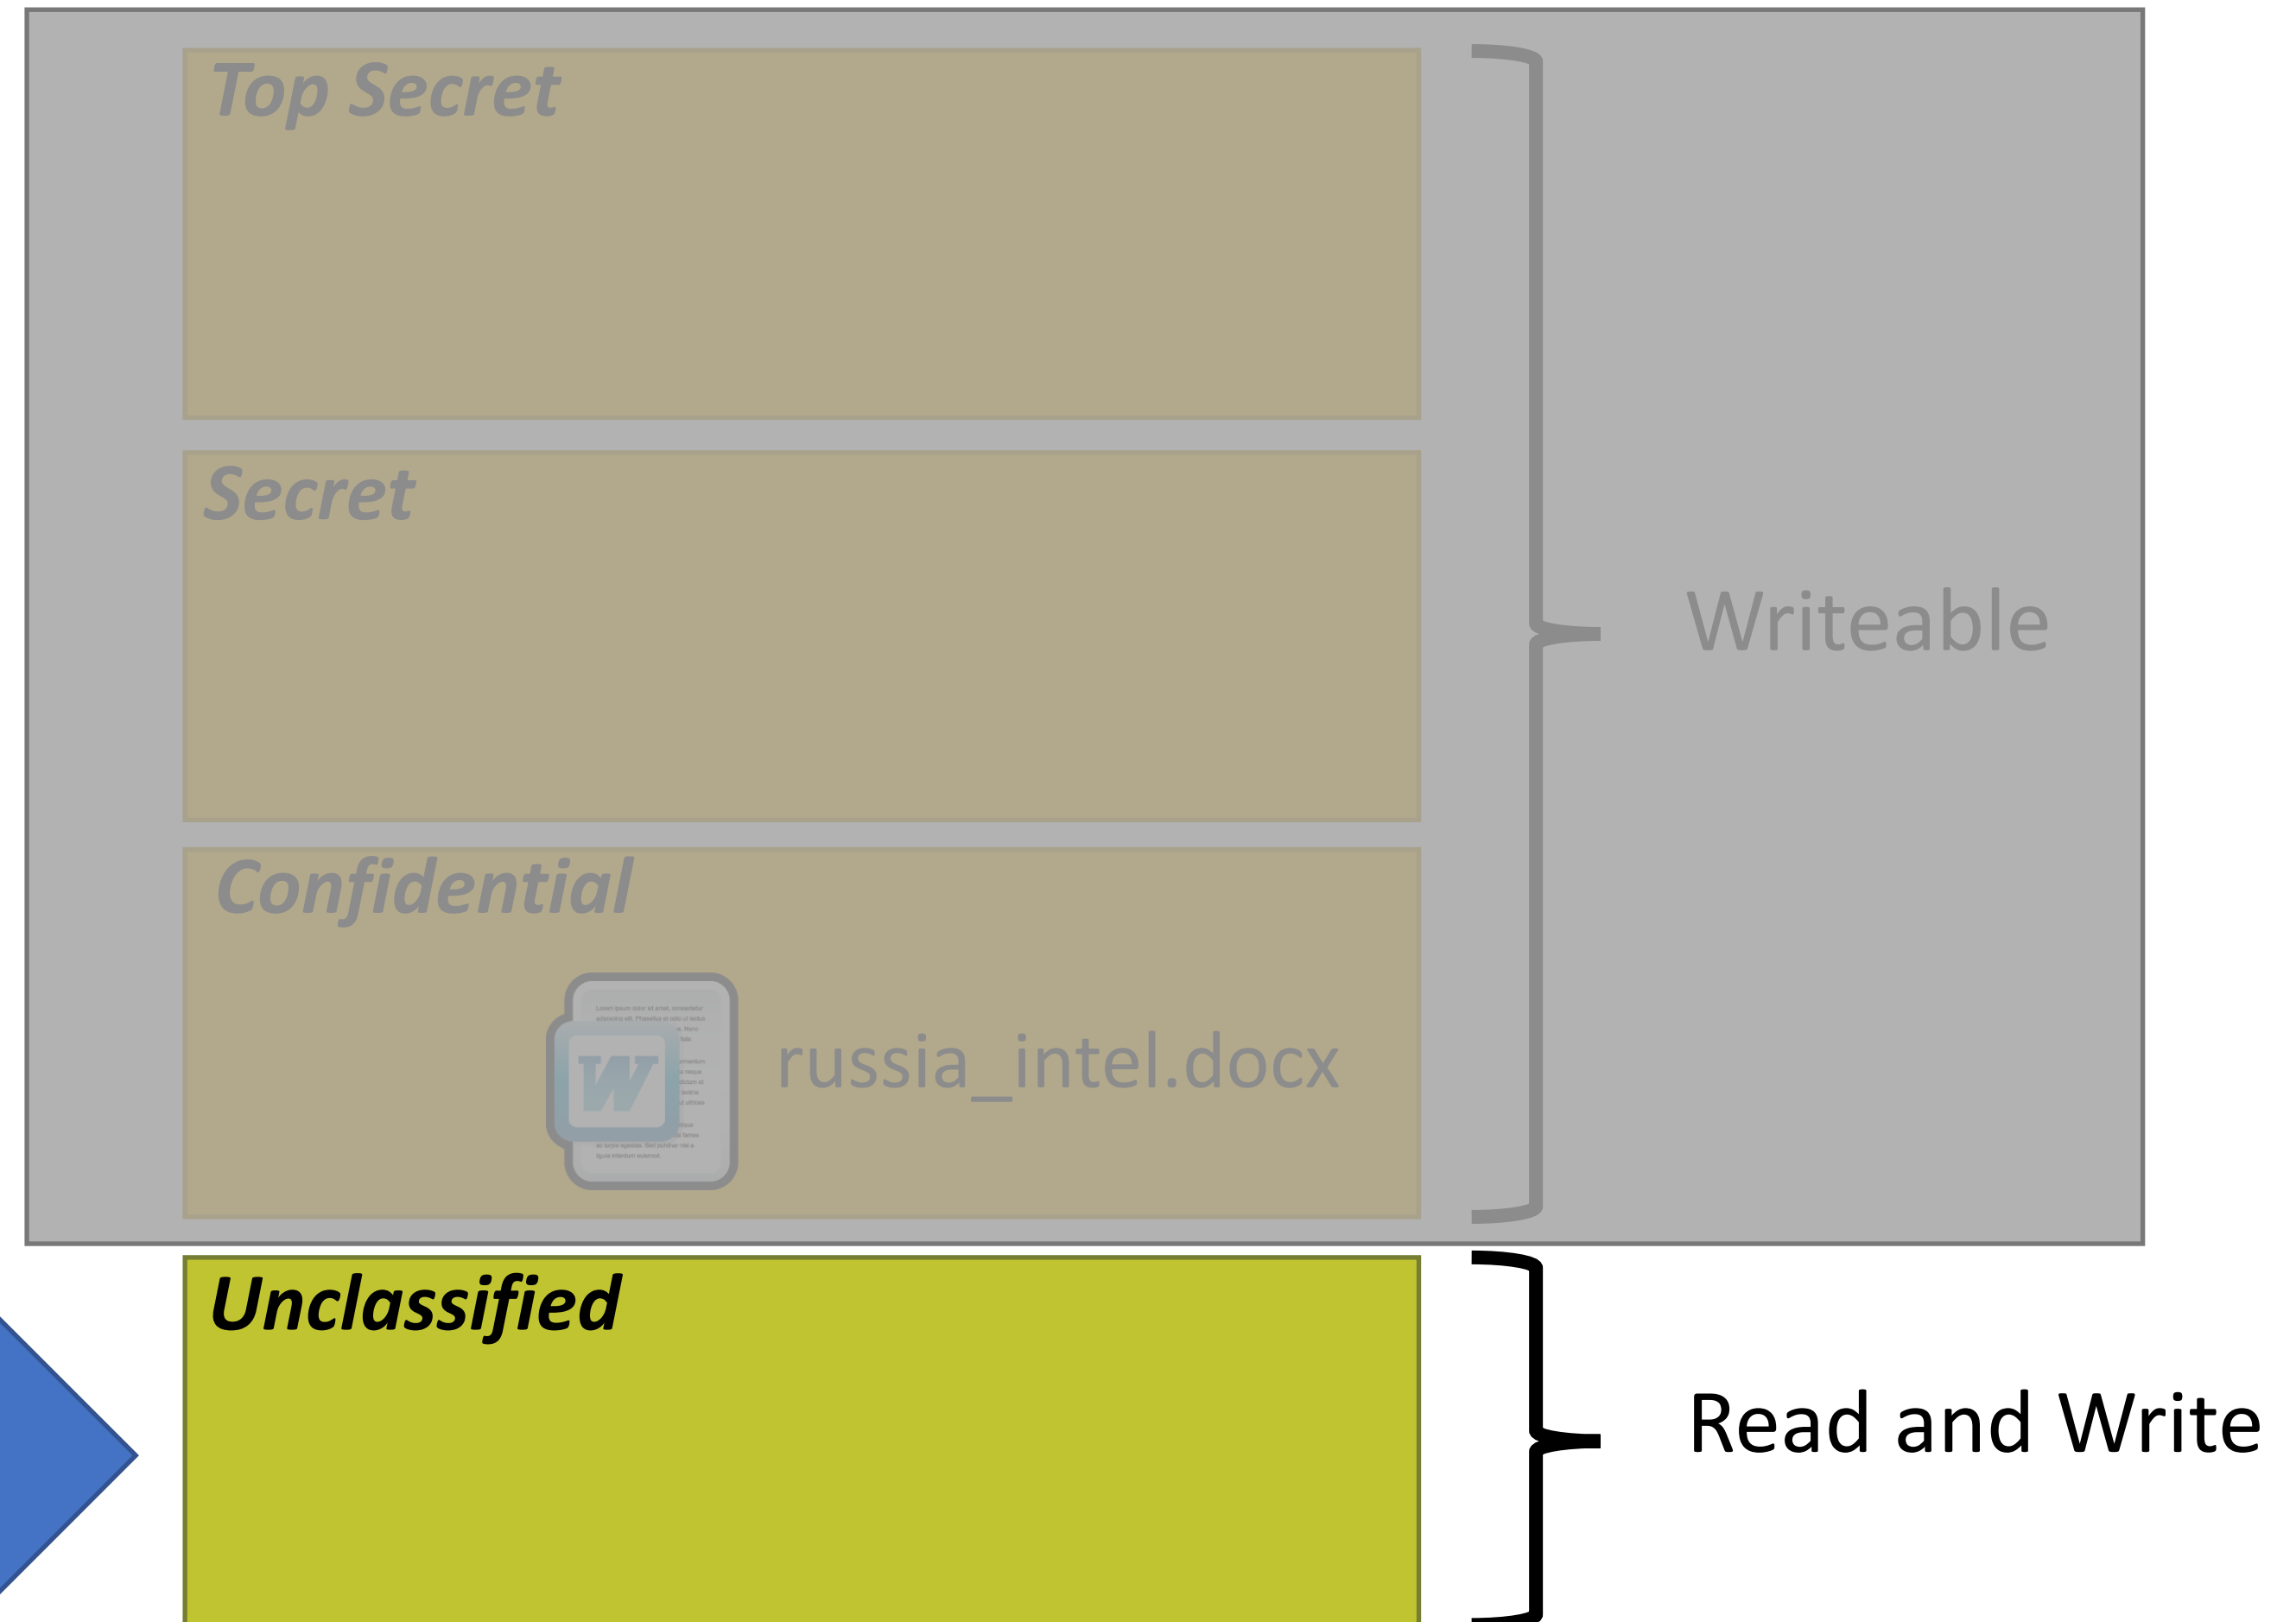

Exploiting a Covert Channel

Bell-LaPadula MAC

<i>Top Secret</i>	
<i>Secret</i>	
<i>Confidential</i>	
<i>Unclassified</i>	

Binary Encoded Message
010010...



Secret

Received Message



Unclassified

Exploiting a Covert Channel

Bell-LaPadula MAC

Received Message



Unclassified




Binary Encoded Message
010010...




Secret


Exploiting a Covert Channel

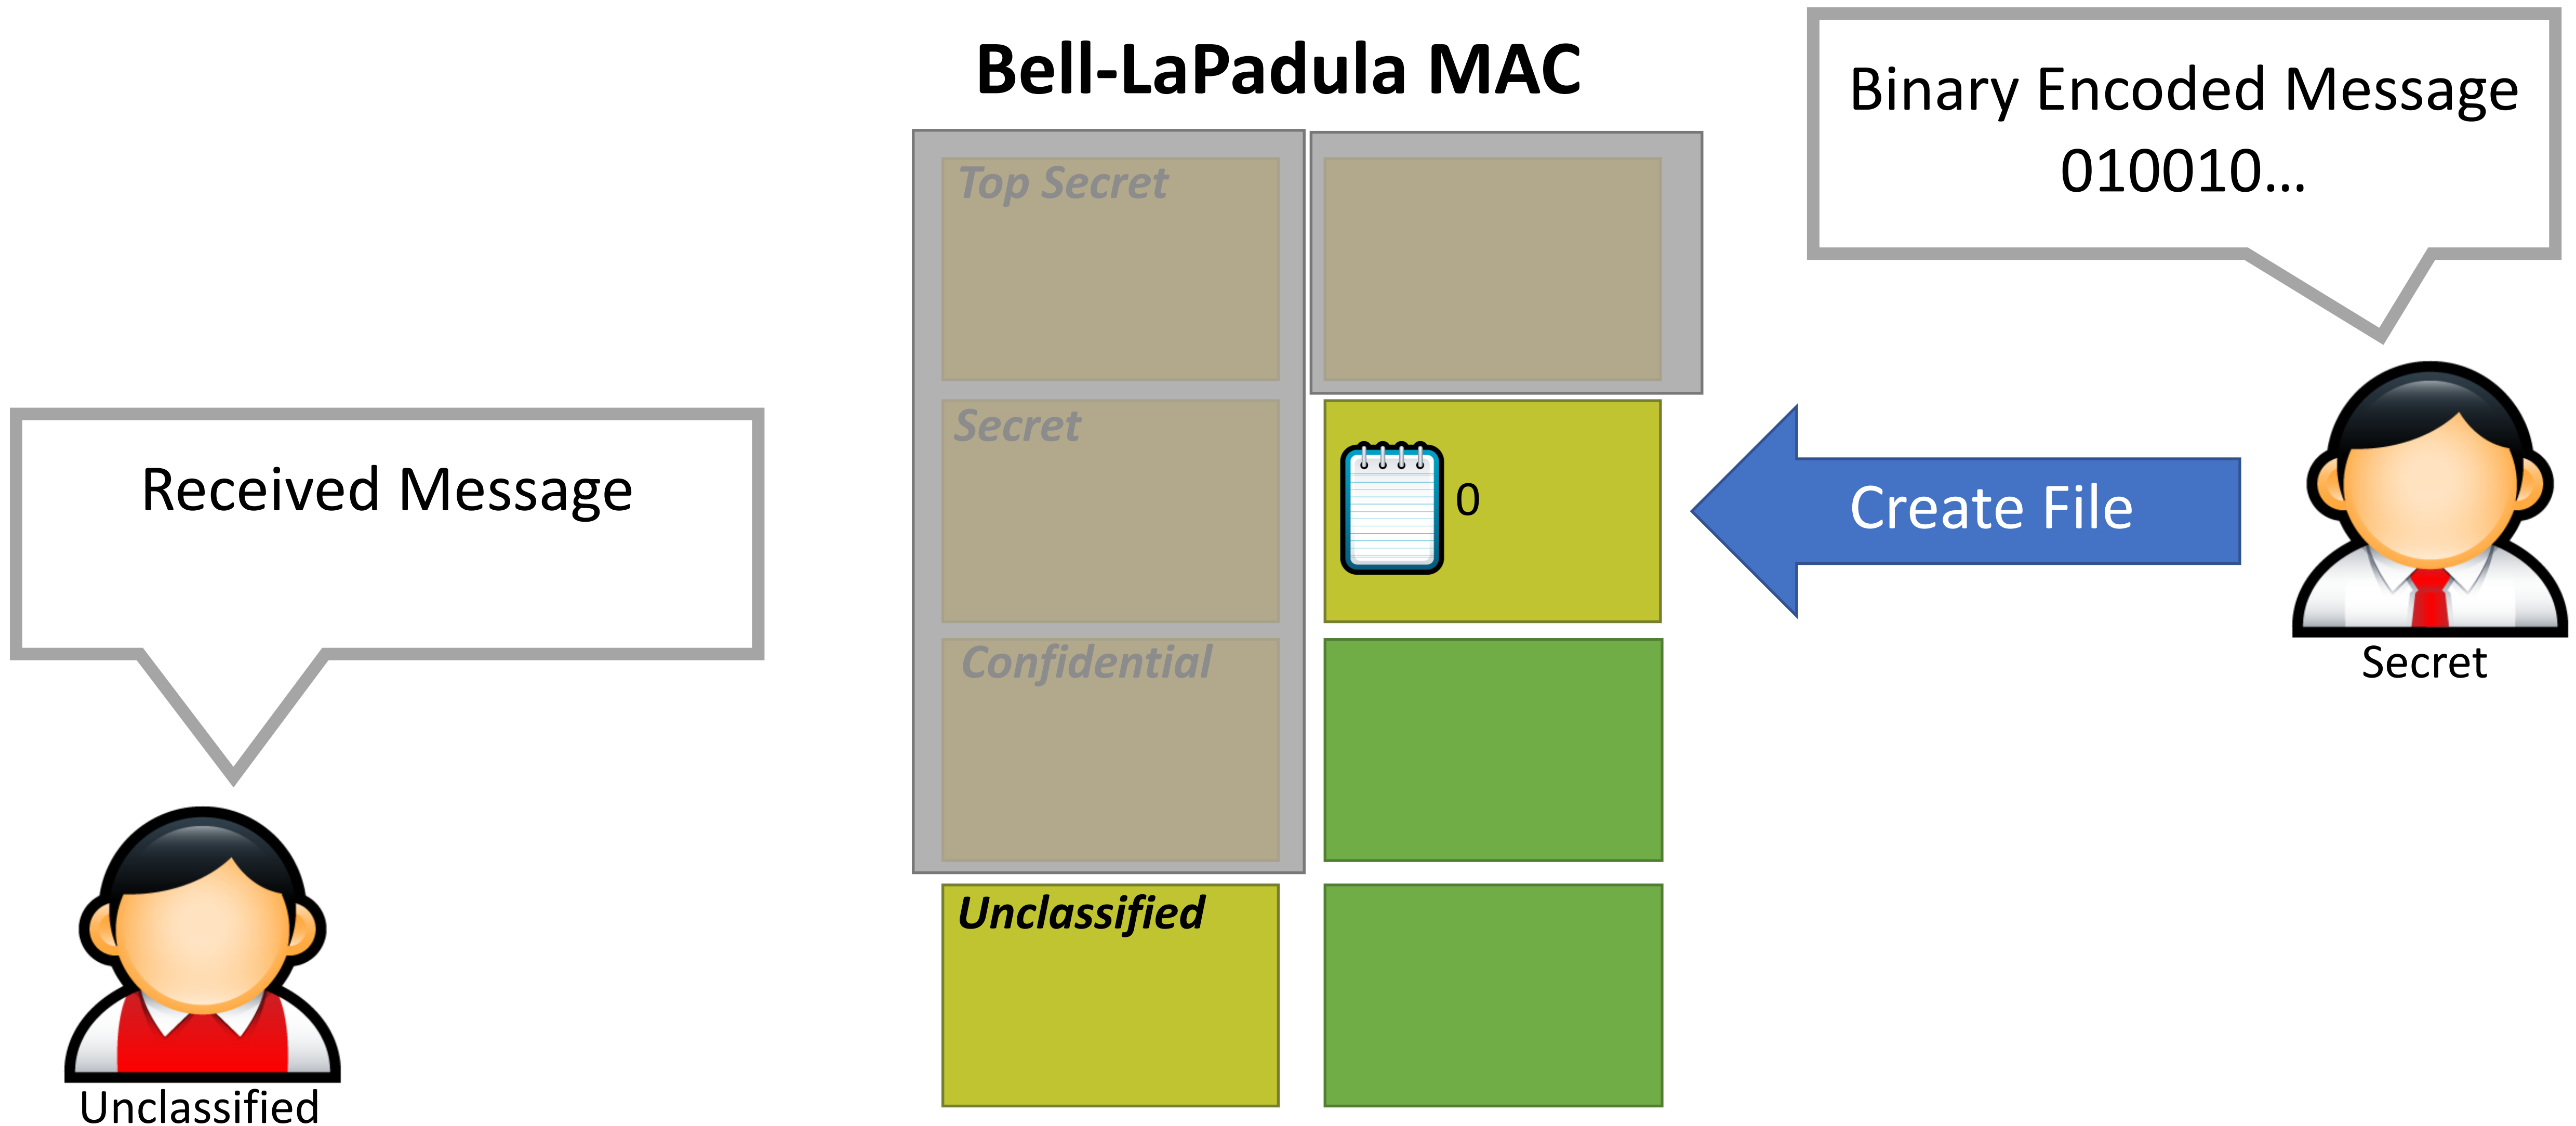

Exploiting a Covert Channel

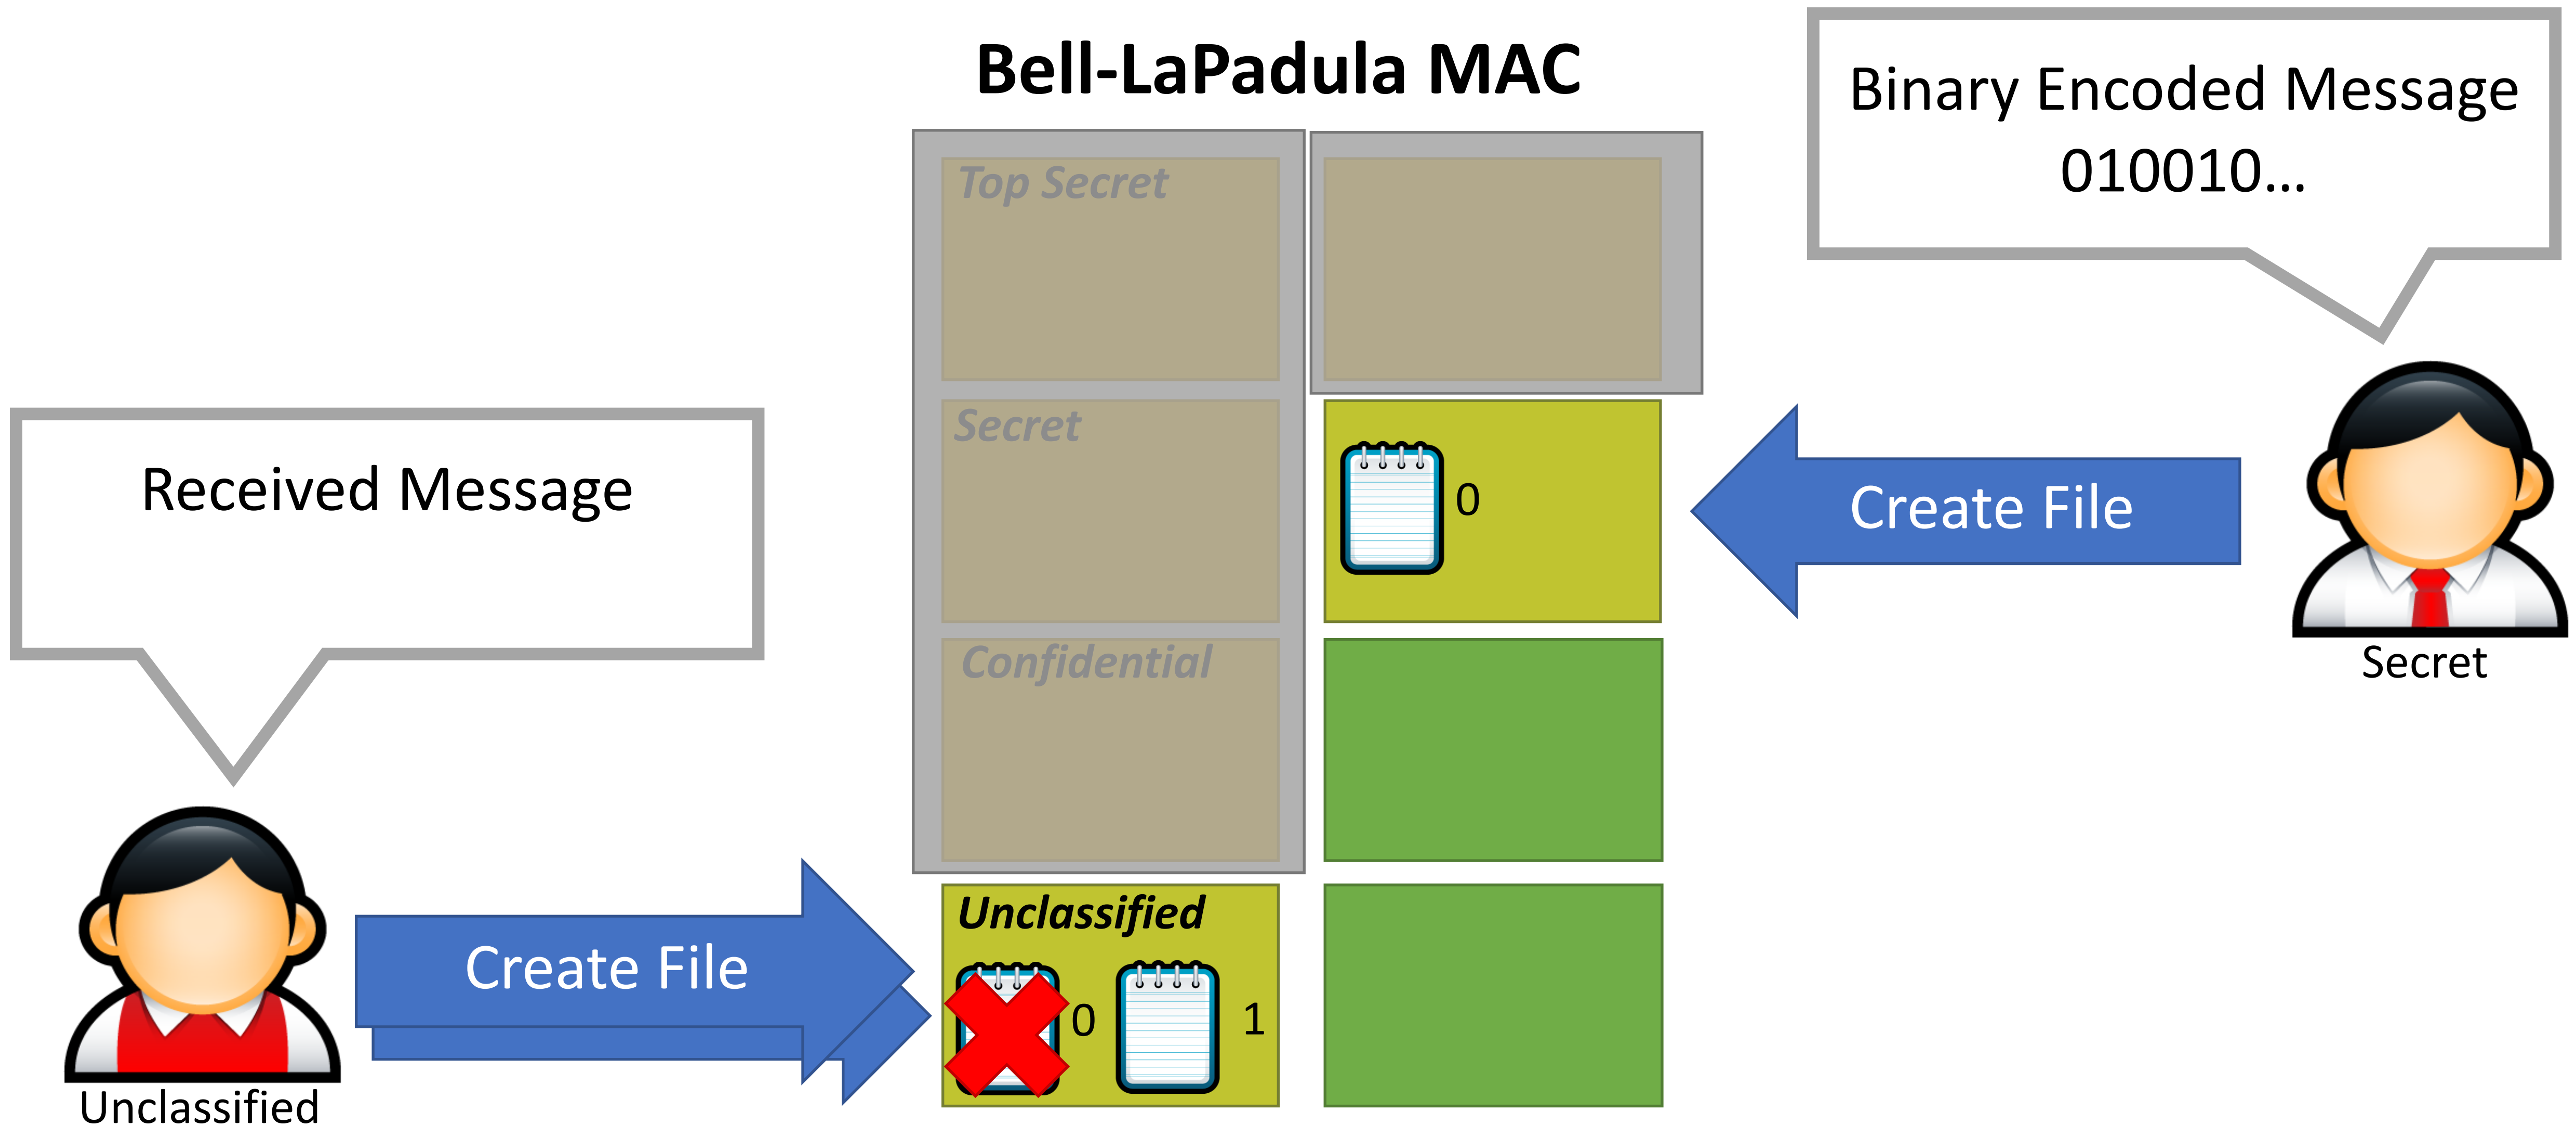

Exploiting a Covert Channel

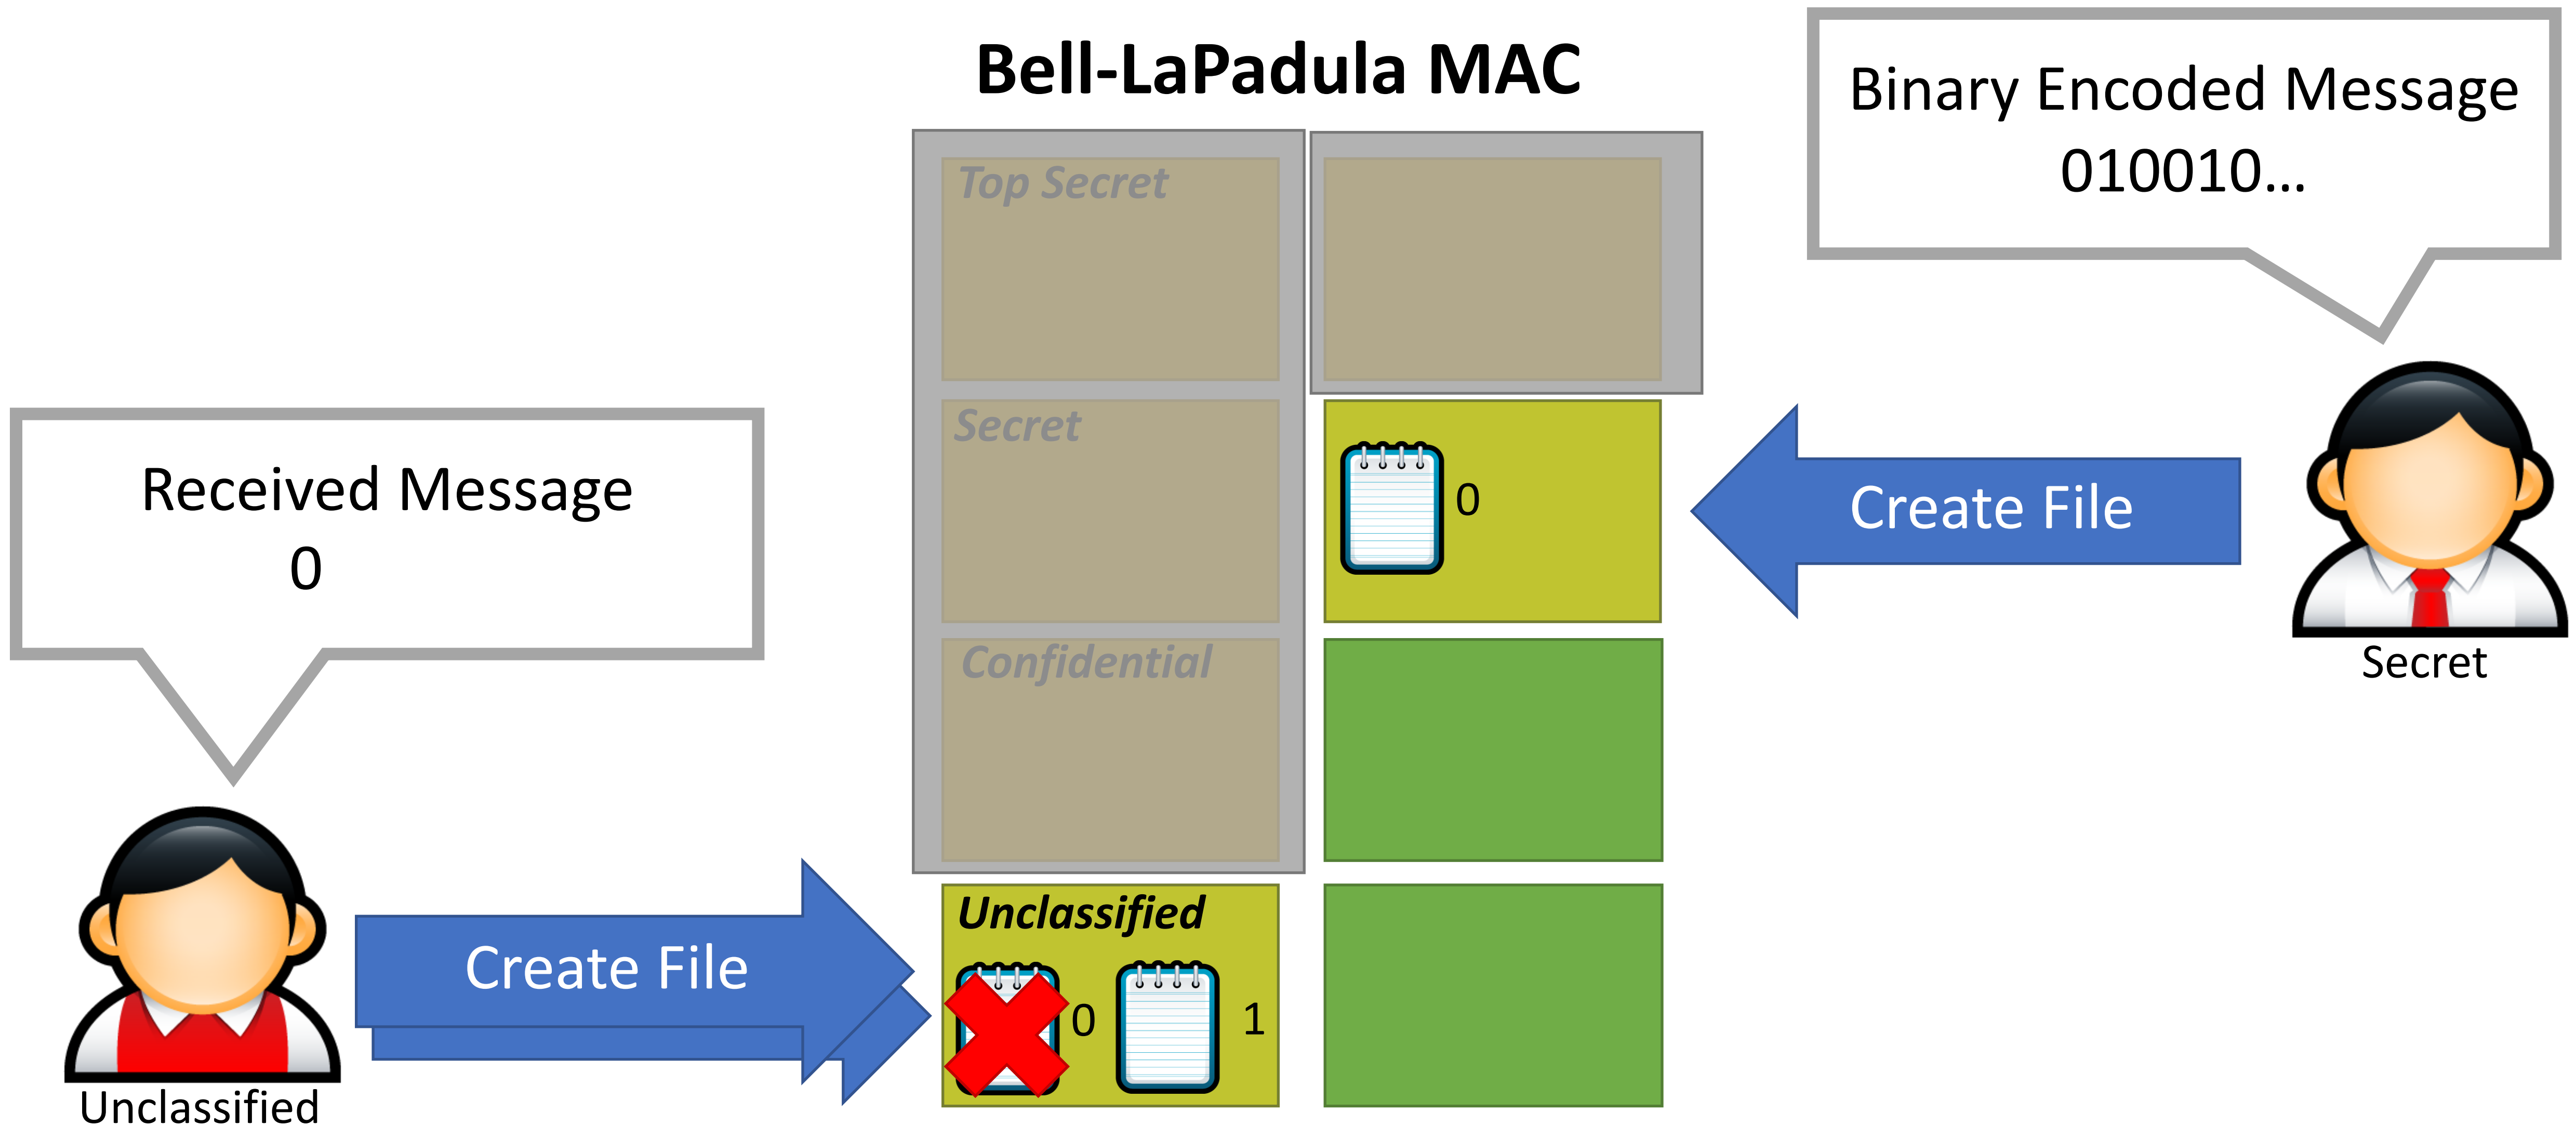

Exploiting a Covert Channel

Received Message
0 1 0



Unclassified

Bell-LaPadula MAC

<i>Top Secret</i>	
<i>Secret</i>	
<i>Confidential</i>	
<i>Unclassified</i>	

Binary Encoded Message
010010...



Secret

Leveraging Covert Channels

- Covert channels are typically noisy
 - Based on precise timing of events
 - May result in encoding errors, i.e. errors in data transmission
 - Communication is probabilistic
- Information theory and coding theory can be applied to make covert channels more robust
 - Naïve approach: duplicate the data n times
 - Better approach: uses Forward Error Correction (FEC) coding
 - Zany approach: use Erasure Coding

Bell-LaPadula and Covert Channels

- Covert channels are not blocked by the ★-property
- It is very hard, perhaps impossible, to block all covert channels
 - May appear in program code
 - Or operating system code
 - Or in the hardware itself (e.g. CPU covert channels)

Bell-LaPadula and Covert Channels


- Covert channels are not blocked by the ★-property
- It is very hard, perhaps impossible, to block all covert channels
 - May appear in program code
 - Or operating system code
 - Or in the hardware itself (e.g. CPU covert channels)
- Potential mitigations:
 - Limit the bandwidth of covert channels by enforcing rate limits
 - Warning: may negatively impact system performance
 - Intentionally make channels noisier by using randomness to introduce “chaff”
 - Warning: slows down attacks, but may not stop them
 - Use anomaly detection to identify subjects using a covert channel
 - Warning: may result in false positives
 - Warning: no guarantee this will detect all covert channels

Side Channel Attacks

- Side channels result from inadvertent information leakage
 - Timing – e.g., password recovery by timing keystrokes
 - Power – e.g., crypto key recovery by power fluctuations
 - RF emissions – e.g., video signal recovery from video cable EM leakage
- Virtually any shared resource can be used

Side Channel Attack Example

- Victim is decrypting RSA data
 - Key is not known to the attacker
 - Encryption process is not directly accessible to the attacker
- Attacker is logged on to the same machine as the victim
 - Secret key can be deciphered by observing the CPU voltage
 - Short peaks = no multiplication (0 bit), long peaks = multiplication (1 bit)

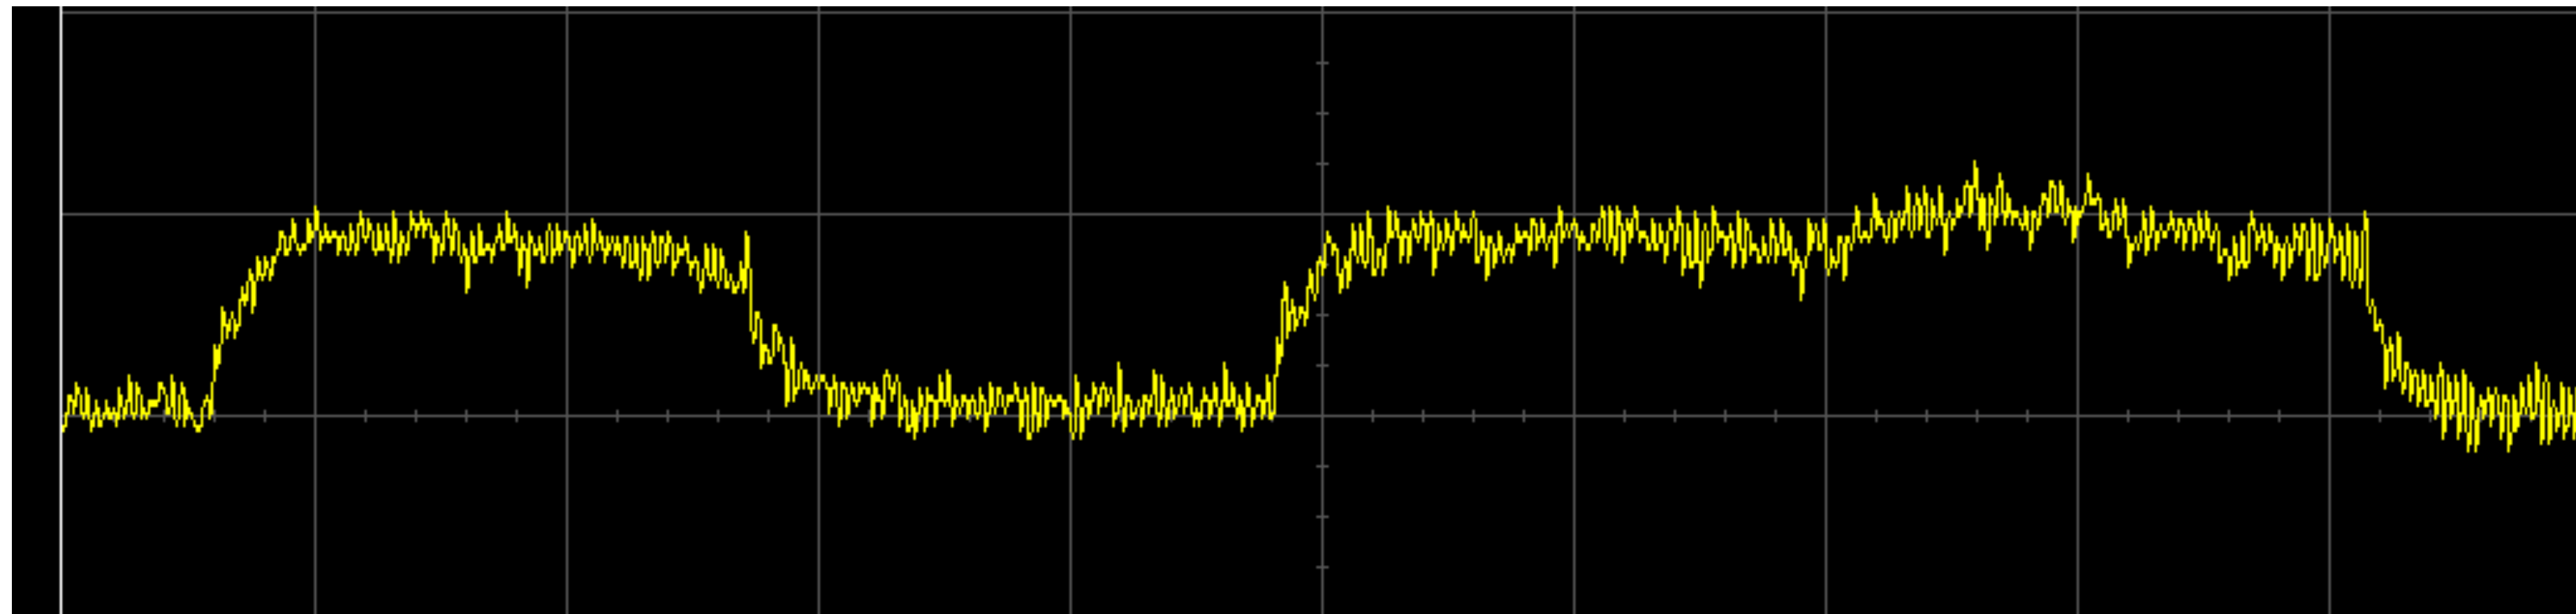

Real Side Channel Attacks

- CPU voltage attacks against RSA
- Keystroke timing attacks against SSH
- Timing and CPU cache attacks against AES
- RF radiation attacks against computer monitors!
 - Attacker can observe what is on your screen
- CPU cache attacks against process isolation
 - Meltdown and Spectre
 - Also leverage a covert channel ;)